
# program: NEWLINE statement EOF → program ::= ( statement | NEWLINE )\* EOF

no references

#### statement:

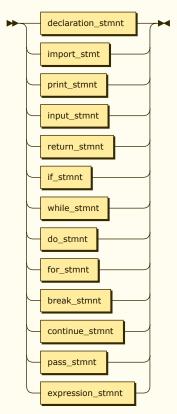

statement
::= declaration\_stmnt declaration\_stmnt
import\_stmt
print\_stmnt
input\_stmnt
return\_stmnt
if\_stmnt
while\_stmnt
do\_stmnt
for\_stmnt
break\_stmnt
continue\_stmnt
pass\_stmnt
expression\_stmnt

referenced by:

- <u>block</u><u>program</u>


## declaration\_stmnt:



referenced by:

• <u>statement</u>

#### variable\_declaration:




variable\_declaration
 ::= var\_type identifier ( '=' assignment\_expr )? ( ',' identifier ( '=' assignment\_expr )? )\* NEWLINE

referenced by:

• declaration stmnt


## var\_type:



referenced by:

variable declaration


## function\_declaration:



referenced by:

• <u>declaration stmnt</u>

# identifier:




identifier
::= alphabetic ( alphabetic | digit | '\_' )\*


referenced by:

- <u>function call</u>
- <u>function declaration</u>
- input stmnt
- variable declaration

## block:

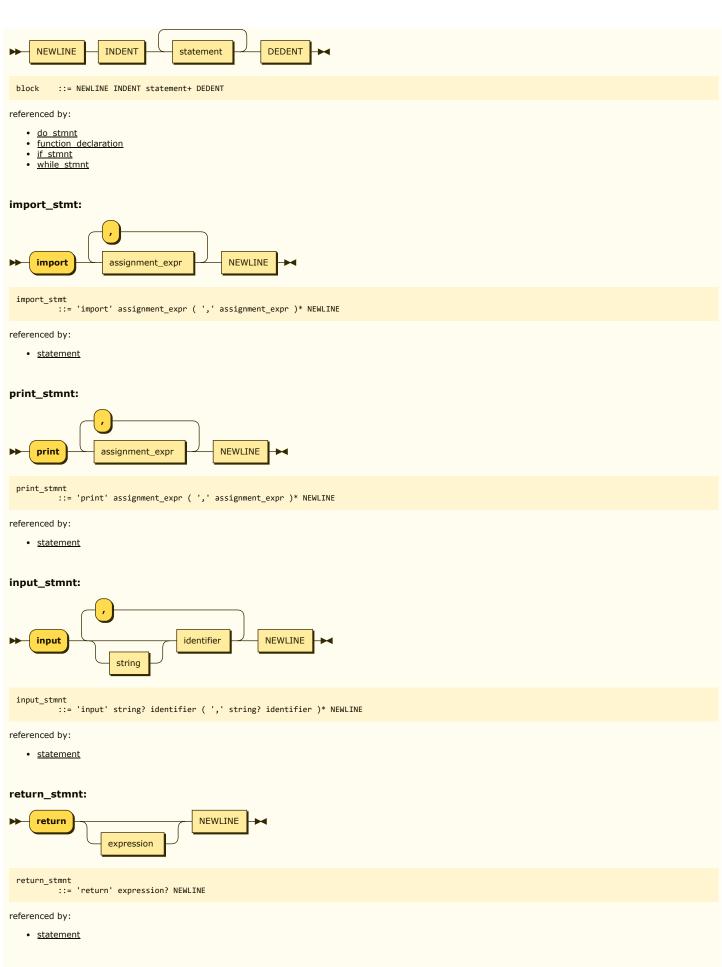

#### if\_stmnt:




if\_stmnt ::= 'if' expression block ( 'else' block )?

referenced by: • statement while\_stmnt: while expression block while\_stmnt
 ::= 'while' expression block referenced by: • statement do\_stmnt: while expression NEWLINE do\_stmnt ::= 'do' block 'while' expression NEWLINE referenced by: • <u>statement</u> for\_stmnt: IDENTIFIER in **▶** for sequence for\_stmnt
 ::= 'for' IDENTIFIER 'in' sequence referenced by: • statement break\_stmnt: break NEWLINE break\_stmnt
::= 'break' NEWLINE referenced by: • statement continue\_stmnt: continue NEWLINE continue\_stmnt
 ::= 'continue' NEWLINE referenced by: • statement pass\_stmnt: NEWLINE pass pass\_stmnt
 ::= 'pass' NEWLINE referenced by: • statement expression\_stmnt:

```
NEWLINE -
     expression
 expression stmnt
         ::= expression NEWLINE
referenced by:
   • statement
type_function:
    type
                     expression
 type_function
    ::= 'type' '(' expression ')'
no references
expression:
     assignment_expr
                                     expression
 expression
         ::= assignment_expr ( ',' expression )*
referenced by:
   • do stmnt
   • <u>expression</u>
     expression stmnt
   • <u>if stmnt</u>
   <u>primary expr</u><u>return stmnt</u>
   • type function
   • while stmnt
assignment\_expr:\\
                                =
     logical_or_expr
                                            assignment_expr
                                +=
                                -=
                                *=
                                \=
                                %=
 referenced by:
   • assignment expr
   • <u>expression</u>
     function call
```

- import stmt
- <u>list const</u>
- print stmnt
- variable declaration

## logical\_or\_expr:




```
logical_or_expr
     ::= logical_and_expr ( 'or' logical_or_expr )*
```

referenced by:

- <u>assignment expr</u>
- index
- list appendlist insert • logical or expr

# logical\_and\_expr:




```
{\tt logical\_and\_expr}
         ::= equality_expr ( 'and' logical_and_expr )*
```

referenced by:

- <u>logical and expr</u><u>logical or expr</u>

## equality\_expr:

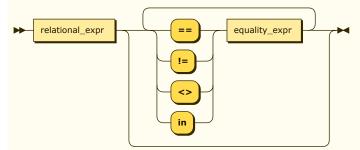


```
equality_expr
::= relational_expr ( ( '==' | '!=' | '<>' | 'in' ) equality_expr )*
```

referenced by:

- <u>equality expr</u><u>logical and expr</u>

#### relational\_expr:

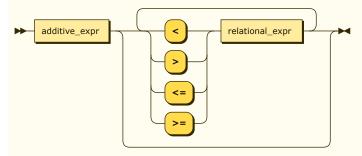


```
::= additive_expr ( ( '<' | '>' | '<=' | '>=' ) relational_expr )*
```

referenced by:

- <u>equality expr</u><u>relational expr</u>

#### additive\_expr:




```
additive_expr
         ::= mult_expr ( ( '+' | '-' ) additive_expr )*
```

referenced by:

- <u>additive expr</u><u>relational expr</u>

## mult\_expr:




```
mult_expr
::= unary_expr ( ( '*' | '/' | '%' ) mult_expr )*
```

referenced by:

- additive exprmult expr

#### unary\_expr:




```
unary_expr ::= ( '+' | '-' | '!' )? primary_expr
```

referenced by:

• mult\_expr

## primary\_expr:




```
primary_expr
::= function_call
| variable
                 constant '(' expression ')'
```

referenced by:

unary expr

### function\_call:




```
function_call
    ::= identifier '(' ( assignment_expr ( ',' assignment_expr )* )? ')'
```


referenced by:

• primary expr

# variable:

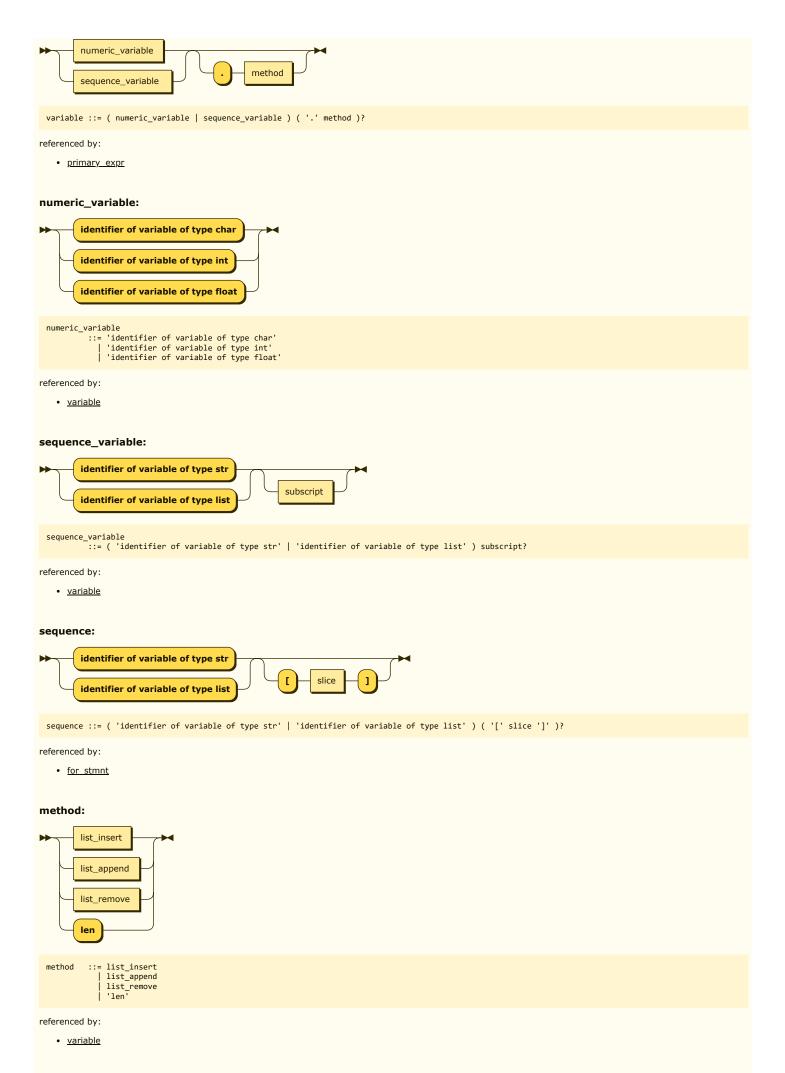

# list\_insert: insert index logical\_or\_expr list\_insert ::= 'insert' '(' index ',' logical\_or\_expr ')' referenced by: method list\_append: append logical\_or\_expr list\_append ::= 'append' '(' logical\_or\_expr ')' referenced by: • method list\_remove: remove index list\_remove ::= 'remove' '(' index ')' referenced by: • method subscript: subscript ::= '[' ( index | slice ) ']' referenced by: sequence variable index: logical\_or\_expr index ::= logical\_or\_expr referenced by: • <u>list\_insert</u> list\_removesubscript slice: logical\_or\_expr logical\_or\_expr slice ::= logical\_or\_expr? ':' logical\_or\_expr? referenced by: sequencesubscript constant:

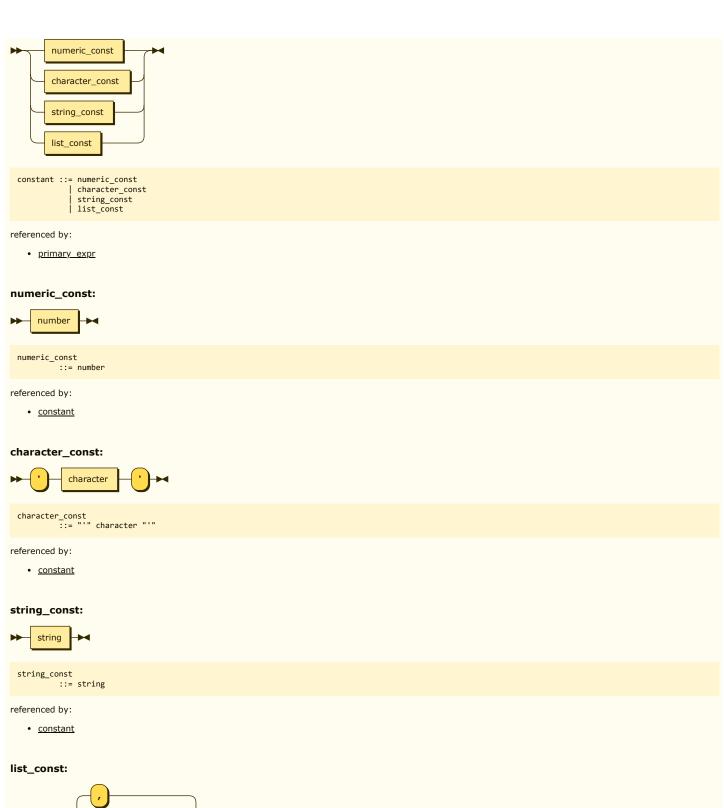




```
list_const
    ::= '[' ( assignment_expr ( ',' assignment_expr )* )? ']'
```

referenced by:

• constant

# string:



string ::= '"' character\* '"'

referenced by: • <u>input stmnt</u> • <u>string const</u> character: any character except single quote referenced by: <u>character const</u><u>string</u>

## alphabetic:




alphabetic ::= [a-zA-Z]

referenced by:

• <u>identifier</u>

#### escape:




escape ::= '\' [bnfrtv\'"0]

referenced by:

• <u>character</u>

### number:



number ::= integer | float

referenced by:

numeric const

# integer:




integer ::= digit+

referenced by:

• <u>number</u>

# float:

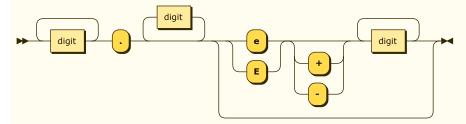

::= digit+ '.' digit\* ( ( 'e' | 'E' ) ( '+' | '-' )? digit+ )? float

referenced by:

• <u>number</u>

# digit:



digit ::= [0-9]

referenced by:

- <u>float</u><u>identifier</u><u>integer</u>

... generated by Railroad Diagram Generator 🚫