

Scorecard Update

Erik Larsen

2026-06-06

Overview

This markdown shows the data logging process of each round, and shows performance trends and metric averages

Set-Up Environment

Attach Packages

```
library(golf)
library(tidyverse)
library(DBI)
library(duckdb)
```

Record New Scorecard

Input the Scores Data

```
# required inputs to fill out the scorecard

round_course <- 'Fred Enke'
round_date <- '2026-05-31'
round_teens <- 'white'

hole_scores <- c(5, 4, 3, 4, 6, 4, 4, 6, 6,
                 5, 5, 5, 5, 6, 3, 5, 7, 7)

FIRs <- c(0, 1, rep(0, 7),
          0, 0, 1, 0, 1, rep(0, 4))

GIRs <- c(0, 1, rep(0, 3), 1, 1, 0, 0,
          0, 0, 1, 0, 0, 1, 0, 0, 0)

putts_rec <- c(1, 2, 1, 1, 2, 3, 2, 2, 2,
               2, 3, 2, 2, 2, 2, 1, 3, 1)

chips_rec <- c(2, 0, 1, 1, 0, 0, 0, 0, 2,
```

```

      1, 1, 0, 1, 1, 0, 1, 0, 2)

penalties_rec <- c(rep(0, 4), 1, rep(0, 4),
                  rep(0, 6), 1, 1, 1)

tee_clubs <- c('4', 'D', '7', 'D', '5', 'PW', '4', '4', 'D',
               '5', '7', 'D', '4', '4', 'GW', '4', 'D', 'D')

index <- 11.0

```

Specify Course and Tees

```

# get the scorecard for the new round, ensuring hole-by-hole scores are filled
if ( length(hole_scores) > 0 ) {
  Card <- golf::get_course(course = round_course, date = round_date, tees = round_tees)
}

```

Get Scoring Metrics

```

# fill the scorecard for the new round, ensuring hole-by-hole scores are filled
if ( length(hole_scores) > 0 ) {
  Card <- golf::log_score(Scorecard = Card,
                        hole_by_hole = hole_scores,
                        GHIN = 10526424,
                        index = index,
                        FIR = FIRs,
                        GIR = GIRs,
                        putts = putts_rec,
                        chips = chips_rec,
                        penalties = penalties_rec,
                        tee_club = tee_clubs)
}

```

Update the db

Update the Players Table

```

con <- golf::get_db_connection()

# if the logged data is newer than the last logged round in the 'rounds' table,
# update the 'players' table

if ( DBI::dbGetQuery(conn = con, statement = paste0("SELECT DISTINCT date FROM rounds ORDER BY date DESC"))[1,] > round_date ) {
  dplyr::distinct(date) |>
  unlist() %>%
  lubridate::as_date(.) |>
  as.character() < round_date &
}

```

```

length(hole_scores) > 0
) {

DBI::dbAppendTable(conn = con,
  name = 'players',
  value = players <- Card |>
    dplyr::select(GHIN, index, date) |>
    dplyr::distinct() |>
    dplyr::rename(handicap_index = index) |>
    dplyr::mutate(date = as.character(date))
)

}

```

Update the Courses Table

```

con <- golf::get_db_connection()

# if the logged data is newer than the last logged round in the 'rounds' table,
# update the 'courses' table

if ( DBI::dbGetQuery(conn = con, statement = paste0("SELECT DISTINCT date FROM rounds ORDER BY date DESC"))
  dplyr::distinct(date) |>
  unlist() %>%
  lubridate::as_date(.) |>
  as.character() < round_date &

length(hole_scores) > 0
) {
DBI::dbAppendTable(conn = con,
  name = 'courses',
  value = course <- Card |>
    dplyr::select(course, tees, to_par, slope, course_rating, hole, yds, par, hole_handicap) |>
    dplyr::distinct() |>
    dplyr::rename(course_name = course)
)

}

```

Update the Rounds Table

```

con <- golf::get_db_connection()

# if the logged data is newer than the last logged round in the 'rounds' table,
# update the 'rounds' table

if ( DBI::dbGetQuery(conn = con, statement = paste0("SELECT DISTINCT date FROM rounds ORDER BY date DESC"))
  dplyr::distinct(date) |>
  unlist() %>%
  lubridate::as_date(.) |>
  as.character() < round_date &

```

```

    length(hole_scores) > 0
  ) {
    DBI::dbAppendTable(conn = con,
                      name = 'rounds',
                      value = Card |>
                        dplyr::select(-to_par, -slope, -course_rating, -yds, -par) |>
                        dplyr::distinct() |>
                        dplyr::rename(handicap_index = index) |>
                        dplyr::rename(course_name = course) |>
                        dplyr::mutate(date = as.character(date))
    )
  }
}

```

Get Club Metrics df

```

# create a dataframe, specifying the shape for tracked shots on each hole
# -> all strokes from off the green

club_metrics_df <- golf::get_tracked_shots_data_shape(round_date = round_date) |>
  dplyr::mutate(hole = gsub(hole, pattern = 'hole_', replacement = '') |> as.numeric()) |>
  dplyr::arrange(hole) |>
  dplyr::mutate(hole = paste0("hole_", hole))

```

Annotate Club Metrics

```

# manually annotate from Garmin Golf App log
club_choice <- c(
  '4', '9', 'SW', 'P',
  'D', '5',
  '7', 'P',
  'D', '5', 'PW',
  '5', '5', 'PW',
  'PW',
  '4', 'GW',
  '4', '4', '5', 'GW',
  'D', '5', 'LW', 'SW',

  '5', 'GW', 'PW',
  '7', 'LW',
  'D', '5', 'SW',
  '4', '5', 'PW',
  '4', '9', '8', 'SW',
  'GW',
  '4', 'PW', 'PW',
  'D', '4', '9',
  'D', '4', '6', 'SW', 'P'
)

dist_to_target <- c(

```

```

220, 143, 39, 8,
270, 200,
178, 8,
270, 194, 16,
205, 205, 127,
142,
220, 69,
220, 120, 15, 63,
270, 220, 17, 35,

205, 125, 9,
179, 29,
270, 202, 27,
220, 205, 11,
220, 155, 167, 27,
119,
220, 134, 24,
270, 220, 134,
270, 220, 177, 44, 10
)

yds <- c(
  231, 182, 48, 7,
  273, 211,
  176, 6,
  101, 201, 19,
  NA_real_, 211, 136,
  125,
  202, 69,
  190, 120, 19, 63,
  259, 209, 48, 24,

  181, 121, 13,
  175, 17,
  258, 181, 22,
  103, 222, 6,
  230, 163, 184, 31,
  118,
  214, 127, 20,
  NA_real_, 212, 127,
  NA_real_, 204, 146, 36, 14
)

lie_type <- c(
  'tee', 'rough', 'rough', 'fairway',
  'tee', 'fairway',
  'tee', 'fairway',
  'tee', 'rough', 'rough',
  'tee', 'tee', 'fairway',
  'tee',
  'tee', 'rough',
  'tee', 'rough', 'rough', 'fairway',
  'tee', 'fairway', 'sand', 'fairway',

```

```

'tee', 'rough', 'fairway',
'tee', 'sand',
'tee', 'fairway', 'fairway',
'tee', 'rough', 'fairway',
'tee', 'fairway', 'fairway', 'rough',
'tee',
'tee', 'rough', 'rough',
'tee', 'tee', 'fairway',
'tee', 'tee', 'fairway', 'fairway', 'fairway'
)

target_status <- c(
  'no', 'no', 'no', 'yes',
  'yes', 'yes',
  'no', 'yes',
  'no', 'no', 'yes',
  'no', 'yes', 'yes',
  'yes',
  'no', 'yes',
  'no', 'no', 'yes', 'yse',
  'no', 'no', 'no', 'yes',

  'no', 'no', 'yes',
  'no', 'yes',
  'yes', 'no', 'yes',
  'no', 'yes', 'yes',
  'yes', 'yes', 'no', 'yes',
  'yes',
  'no', 'no', 'yes',
  'no', 'yes', 'yes',
  'no', 'yes', 'no', 'no', 'yes'
)

location <- c(
  'right', 'long', 'long', 'on_target',
  'on_target', 'on_target',
  'left', 'on_target',
  'left', 'left', 'on_target',
  'left', 'on_target', 'on_target',
  'on_target',
  'right', 'on_target',
  'right', 'left', 'on_target', 'on_target',
  'right', 'short', 'long', 'on_target',

  'right', 'left', 'on_target',
  'right', 'on_target',
  'on_target', 'short', 'on_target',
  'left', 'on_target', 'on_target',
  'on_target', 'on_target', 'long', 'on_target',
  'on_target',
  'right', 'short', 'on_target',
  'left', 'on_target', 'on_target',
  'left', 'on_target', 'short', 'short', 'on_target'
)

```

```

)

type_of_shot <- c(
  'tee', 'full', 'chip', 'chip',
  'tee', 'full',
  'tee', 'chip',
  'tee', 'full', 'chip',
  'tee', 'tee', 'full',
  'tee',
  'tee', 'choked',
  'tee', 'punch', 'punch', 'choked',
  'tee', 'full', 'gsbunker', 'chip',

  'tee', 'full', 'chip',
  'tee', 'gsbunker',
  'tee', 'full', 'chip',
  'tee', 'full', 'chip',
  'tee', 'full', 'full', 'chip',
  'tee',
  'tee', 'full', 'chip',
  'tee', 'tee', 'full',
  'tee', 'tee', 'full', 'chip', 'chip'
)

```

Get Shot Metrics

```

con <- golf::get_db_connection()

# if the data is newer than the last round in the 'club_metrics' table, append
# the new annotations (expands from 18 rows by the number determined from the
# get_tracked_shots_data_shape function)

if ( DBI::dbGetQuery(conn = con, statement = paste0("SELECT DISTINCT date FROM club_metrics ORDER BY date")) %>%
  dplyr::distinct(date) |>
  unlist() %>%
  lubridate::as_date(.) |>
  as.character() < round_date &

  length(hole_scores) > 0
) {
  length(club_choice)
  club_metrics <- golf::harmonize_club_metrics(club_metrics = club_metrics_df,
                                              club_choice = club_choice,
                                              distance_to_target = dist_to_target,
                                              distance_traveled = yds,
                                              lie_type = lie_type,
                                              target_status = target_status,
                                              location = location,
                                              type_of_shot = type_of_shot
                                              )

  club_metrics <- club_metrics |>
  dplyr::mutate(dplyr::across(c(dplyr::contains("yds")), ~as.numeric(.x)))
}

```

```

  head(club_metrics)
}

club_metrics_df |> dplyr::select(tracked_shots) |> dplyr::mutate(sum(tracked_shots))

```

```

##      tracked_shots sum(tracked_shots)
## 1              4              52
## 2              2              52
## 3              2              52
## 4              3              52
## 5              3              52
## 6              1              52
## 7              2              52
## 8              4              52
## 9              4              52
## 10             3              52
## 11             2              52
## 12             3              52
## 13             3              52
## 14             4              52
## 15             1              52
## 16             3              52
## 17             3              52
## 18             5              52

```

Update the Club Metrics Table

```

con <- golf::get_db_connection()

# if the data is newer than the last round in the 'club_metrics' table, append
# the new data to the table

if ( DBI::dbGetQuery(conn = con, statement = paste0("SELECT DISTINCT date FROM club_metrics ORDER BY date")) |>
  dplyr::distinct(date) |>
  unlist() %>%
  lubridate::as_date(.) |>
  as.character() < round_date &

  length(hole_scores) > 0
) {
  DBI::dbAppendTable(conn = con,
    name = 'club_metrics',
    value = club_metrics |>
      dplyr::mutate(date = as.character(date))
  )
}

# clean the global environment
rm(list = ls()[which(grepl(ls(), pattern= 'con|round_course|round_date|index|real_db')==F)])

```

Summarize Metrics

Gather and Format

Gather and format from the database

```
con <- golf::get_db_connection()

# get the hole-by-hole scores from each round in the database

# join the hole-by-hole scores from the 'rounds' table to the 'courses' table
# need each hole's par rating
# need each course's course_rating from the 'courses' table

# join the 'rounds' and 'courses' tables to the 'players' table
# need handicap_index from the 'players' table

scores <- DBI::dbGetQuery(conn = con, statement = paste0(
  "SELECT DISTINCT r.*, c.par, c.course_rating FROM rounds r
  INNER JOIN courses c
  ON c.tees = r.tees
  AND c.course_name = r.course_name
  AND c.hole = r.hole
  INNER JOIN players p
  ON r.GHIN = p.GHIN
  AND r.handicap_index = p.handicap_index
  AND r.date = p.date;"
)) |>
  dplyr::mutate(date = lubridate::as_date(date), # convert strings to date's
               hole = gsub(hole, pattern = 'hole_', replacement = '') |> # enforce hole order
               as.numeric()) |>
  dplyr::relocate(par, .after = hole) |>
  dplyr::relocate(course_rating, .after = tees) |>
  dplyr::group_by(date) |>
  dplyr::arrange(desc(date), hole) |>
  dplyr::ungroup()
```

```
con <- golf::get_db_connection()

# get stroke metrics from the 'club_metrics' table

stroke_quality <- DBI::dbGetQuery(conn = con, statement = paste0(
  "SELECT DISTINCT * FROM club_metrics;"
)) |>
  dplyr::mutate(date = lubridate::as_date(date), # convert strings to date's
               hole = gsub(hole, pattern = 'hole_', replacement = '') |> # enforce hole order
               as.numeric()) |>
  dplyr::group_by(date) |>
  dplyr::arrange(desc(date), hole, stroke) |>
  dplyr::ungroup()
```

```
## [1] "BEFORE TRY BLOCK"
## [1] "TRY BLOCK START"
```

```
## [1] "TABLES INSIDE TRY, AFTER DEV WRITES:"
## [1] "club_metrics"          "courses"          "dev_club_metrics"  "dev_courses"
## [10] "players"              "predictions_round" "rounds"
## [1] "INSIDE TRY BLOCK - END"
```

Compute Metrics

Compute standard metrics

```
# define metrics
scores_sum <- scores |>
  dplyr::mutate(date_course = paste0(date,
                                     '\n',
                                     course_name, '\n',
                                     handicap_index),
               chips = dplyr::case_when(
                 grepl(date, pattern = '07-13') ~ NA_real_, TRUE ~ chips),
               `chips+putts` = chips+putts,
               FIR_opps = dplyr::case_when(par > 3 ~ 1, TRUE ~ NA),
               `Iron FIRs` = dplyr::case_when(par > 3 &
                                               grepl(tee_club, pattern = '4|5') &
                                               FIR == 1 ~ 1,
                                               TRUE ~ 0),
               `Iron FIR opps` = dplyr::case_when(par > 3 &
                                                  grepl(tee_club, pattern = '4|5') ~ 1,
                                                  TRUE ~ 0),
               `Driver FIRs` = dplyr::case_when(par > 3 &
                                                  tee_club == 'D' &
                                                  FIR == 1 ~ 1,
                                                  TRUE ~ 0),
               `Driver FIR opps` = dplyr::case_when(par > 3 &
                                                  tee_club == 'D' ~ 1,
                                                  TRUE ~ 0),
               `Par 3 GIRs` = dplyr::case_when(par == 3 &
                                                  GIR == 1 ~ 1,
                                                  TRUE ~ 0),
               greenie_putts = dplyr::case_when(GIR == 1 ~ putts, TRUE ~ NA_real_),
               updown_conv = dplyr::case_when(GIR == 0 &
                                               par == gross ~ 1,
                                               TRUE ~ 0),
               updown_opps = dplyr::case_when(GIR == 0 &
                                               chips > 0 ~ 1,
                                               TRUE ~ 0)
  ) |>
  dplyr::rename(`Handicap Index` = handicap_index)

# summarize by round
scores_sum <- scores_sum |>
  dplyr::group_by(date, date_course, course_rating, `Handicap Index`) |>
  dplyr::summarize(
    FIRs = sum(FIR, na.rm = F),
    `Iron FIRs` = sum(`Iron FIRs`, na.rm = T),
    `Iron FIR%` = round(((sum(`Iron FIRs`, na.rm = T)/sum(`Iron FIR opps`, na.rm = T))*100))
  )
```

```

`Driver FIRs` = sum(`Driver FIRs`, na.rm = T),
`Driver FIR%` = round(((sum(`Driver FIRs`, na.rm = T)/sum(`Driver FIR opps`, na.rm =
`FIR%` = round((sum(FIRs, na.rm = T)/sum(FIR_opps, na.rm = T))*100, 1),
GIRs = sum(GIR, na.rm = F),
`Par 3 GIRs` = sum(`Par 3 GIRs`, na.rm = T),
`GIR%` = round((sum(GIRs, na.rm = T)/18)*100, 1),
putts = sum(putts, na.rm = F),
`Avg GIR putts` = round(mean(greenie_putts, na.rm = T), 2),
chips = sum(chips, na.rm = F),
`chips+putts` = sum(`chips+putts`, na.rm = F),
`UpDown%` = round(((sum(updown_conv, na.rm = T)/sum(updown_opps, na.rm = T))*100), 1),
pars = sum(is_gross_par, na.rm = F),
birdies = sum(is_gross_birdie, na.rm = F),
bogies = sum(is_gross_bogey, na.rm = F),
`doubles+` = sum(is_gross_bogey_worse, na.rm = F),
penalties = sum(penalties, na.rm = T),
`Gross Score` = mean(tot_gross, na.rm = F),
`Net Score` = mean(tot_net, na.rm = F)) %>%
dplyr::mutate(dplyr::across(c(`Iron FIRs`, `Driver FIRs`,
                             `Iron FIR%`, `Driver FIR%`, `FIR%`),
                             ~dplyr::if_else(is.na(FIRs), NA, .)),

dplyr::across(c(`Par 3 GIRs`, `Avg GIR putts`,
                `UpDown%`, `GIR%`),
                ~dplyr::if_else(is.na(GIRs), NA, .)),

`chips+putts` = dplyr::case_when(is.na(chips) ~ NA_real_,
                                TRUE ~ `chips+putts`)) %>%

dplyr::mutate(

  `UpAndDown%` = dplyr::case_when(

    grepl(date, pattern = '07-13|09-21') ~ NA, TRUE ~ `UpDown%`),

  `Iron FIR%` = dplyr::case_when(`Iron FIR%` == NaN ~ 0.0, TRUE ~ `Iron FIR%`))

```

```

head(scores_sum |>
  dplyr::arrange(desc(date)))

```

```

## # A tibble: 6 x 26
## # Groups:   date, date_course, course_rating [6]
##   date      date_course      course_rating `Handicap Index`  FIRs `Iron FIRs` `Iron FIR%` `Driver FIR%`
##   <date>      <chr>          <dbl>          <dbl> <int>    <dbl>    <dbl>    <dbl>
## 1 2026-05-31 "2026-05-31\nFre~      68.6          11      3         1      12.5
## 2 2026-05-24 "2026-05-24\nQua~      68.8          11      9         7      77.8
## 3 2026-05-17 "2026-05-17\nRan~      70.4          11      2         0      NaN
## 4 2026-04-26 "2026-04-26\nDel~      68.5          11      5         0      NaN
## 5 2026-04-19 "2026-04-19\nRan~      71.7          11      3         0      NaN
## 6 2026-04-05 "2026-04-05\nRan~      71.7          11      6         0         0
## # i 5 more variables: `doubles+` <int>, penalties <int>, `Gross Score` <dbl>, `Net Score` <dbl>, `Up

```

View Metrics

Separate and view metrics

Scoring Metrics Scores and Handicap

```
scoring_metrics <- scores_sum |>
  dplyr::select(`Handicap Index`, `Gross Score`, `Net Score`)
head(scoring_metrics |>
  dplyr::arrange(desc(date)))
```

```
## # A tibble: 6 x 6
## # Groups:   date, date_course, course_rating [6]
##   date      date_course      course_rating `Handicap Index` `Gross Score` `Net Score`
##   <date>    <chr>          <dbl>          <dbl>          <dbl>          <dbl>
## 1 2026-05-31 "2026-05-31\nFred Enke\n11"      68.6            11            90
## 2 2026-05-24 "2026-05-24\nQuarry Pines\n11"    68.8            11            86
## 3 2026-05-17 "2026-05-17\nRandolph North\n11"   70.4            11            85
## 4 2026-04-26 "2026-04-26\nDell Urich\n11"      68.5            11            92
## 5 2026-04-19 "2026-04-19\nRandolph North\n11"   71.7            11            91
## 6 2026-04-05 "2026-04-05\nRandolph North\n11"   71.7            11            88
```

Stroke Metrics In golf, every hole has a **par**— an average number of strokes taken to get the ball in the hole

There are (almost always), three different **pars** on every course:

- par 3s
- par 4s
- par 5s

A shorthand to determine how a golfer performed across holes is to rate how many strokes *relative to par* they were (-1, -2, +1, +2, etc)

These numbers are given names:

- 0 = par
- -2 = eagle
- -1 = birdie
- +1 = bogey
- +2 = double bogey

I quantify these below:

```
stroke_metrics <- scores_sum |>
  dplyr::select(`doubles+`, bogies, pars, birdies)
head(stroke_metrics |>
  dplyr::arrange(desc(date)))
```

```
## # A tibble: 6 x 7
## # Groups:   date, date_course, course_rating [6]
```

	date	date_course	course_rating	`doubles+`	bogies	pars	birdies
	<date>	<chr>	<dbl>	<int>	<int>	<int>	<int>
## 1	2026-05-31	"2026-05-31\nFred Enke\n11"	68.6	5	7	5	1
## 2	2026-05-24	"2026-05-24\nQuarry Pines\n11"	68.8	4	6	8	0
## 3	2026-05-17	"2026-05-17\nRandolph North\n11"	70.4	3	8	6	1
## 4	2026-04-26	"2026-04-26\nDell Urich\n11"	68.5	6	7	4	1
## 5	2026-04-19	"2026-04-19\nRandolph North\n11"	71.7	4	8	6	0
## 6	2026-04-05	"2026-04-05\nRandolph North\n11"	71.7	3	9	6	0

Around-the-Green Metrics Chips: + strokes around the green taken to get onto the green

Putts: + strokes taken with the putter on the green

Avg GIR putts: + Average # of putts on holes where the ball was hit on to the green within 2 strokes of par (green in regulation, GIR)

UpDown% (aka Scramble%): + # of holes without a GIR but par was made / # of holes without a GIR

```
atg_metrics <- scores_sum |>
  dplyr::select(chips, `chips+putts`, `UpAndDown%`, putts, `Avg GIR putts`)
head(atg_metrics |>
  dplyr::arrange(desc(date)))
```

## # A tibble: 6 x 8							
## # Groups: date, date_course, course_rating [6]							
	date	date_course	course_rating	chips	`chips+putts`	`UpAndDown%`	putts
	<date>	<chr>	<dbl>	<dbl>	<dbl>	<dbl>	<int>
## 1	2026-05-31	"2026-05-31\nFred Enke\n11"	68.6	13	47	20	34
## 2	2026-05-24	"2026-05-24\nQuarry Pines\n11"	68.8	17	53	0	36
## 3	2026-05-17	"2026-05-17\nRandolph North\n11"	70.4	17	46	31.2	29
## 4	2026-04-26	"2026-04-26\nDell Urich\n11"	68.5	19	55	15.4	36
## 5	2026-04-19	"2026-04-19\nRandolph North\n11"	71.7	20	56	15.4	36
## 6	2026-04-05	"2026-04-05\nRandolph North\n11"	71.7	21	52	20	31

Ball Striking Metrics Approach and tee accuracy

GIR (green in regulation): + hole where the ball was hit on to the green within 2 strokes of par

FIR (fairway in regulation): + hole where the ball was hit on to the fairway from the tee box (only on par 4's and par 5's)

Iron FIR: + hole where an iron was used off the tee for a FIR

Driver FIR: + hole where driver was used off the tee for a FIR

```
ball_striking_metrics <- scores_sum |>
  dplyr::select(GIRs, `GIR%`, `Par 3 GIRs`,
    FIRs, `FIR%`, `Iron FIRs`, `Iron FIR%`,
    `Driver FIRs`, `Driver FIR%`)
head(ball_striking_metrics |>
  dplyr::arrange(desc(date)))
```

## # A tibble: 6 x 12							
## # Groups: date, date_course, course_rating [6]							
	date	date_course	course_rating	GIRs	`GIR%`	`Par 3 GIRs`	FIRs
##							

	<date>	<chr>	<dbl>	<int>	<dbl>	<dbl>	<int>	<dbl>
## 1	2026-05-31	"2026-05-31\nFred Enke\n11"	68.6	5	27.8		2	3
## 2	2026-05-24	"2026-05-24\nQuarry Pines\n11"	68.8	10	55.6		2	9
## 3	2026-05-17	"2026-05-17\nRandolph North\n11"	70.4	2	11.1		1	2
## 4	2026-04-26	"2026-04-26\nDell Urich\n11"	68.5	3	16.7		0	5
## 5	2026-04-19	"2026-04-19\nRandolph North\n11"	71.7	4	22.2		1	3
## 6	2026-04-05	"2026-04-05\nRandolph North\n11"	71.7	3	16.7		1	6

Club Metrics Yardage and accuracy for each club

```
## # A tibble: 6 x 6
## # Groups:   date [1]
##   date      club      n rd_min_yds_to_target rd_min_yds_traveled rd_min_yd_diff
##   <date>    <chr> <int>          <dbl>          <dbl>          <dbl>
## 1 2026-05-31 4         9          120          103           -11
## 2 2026-05-31 5         9           15           NA            NA
## 3 2026-05-31 6         1          177          146            31
## 4 2026-05-31 7         2          178          175             2
## 5 2026-05-31 8         1          167          184           -17
## 6 2026-05-31 9         3          134          127           -39
```

```
## # A tibble: 6 x 6
## # Groups:   date [1]
##   date      club      n rd_max_yds_to_target rd_max_yds_traveled rd_max_yd_diff
##   <date>    <chr> <int>          <dbl>          <dbl>          <dbl>
## 1 2026-05-31 4         9          220          231           117
## 2 2026-05-31 5         9          220           NA            NA
## 3 2026-05-31 6         1          177          146            31
## 4 2026-05-31 7         2          179          176             4
## 5 2026-05-31 8         1          167          184           -17
## 6 2026-05-31 9         3          155          182             7
```

```
## # A tibble: 6 x 10
## # Groups:   date [1]
##   date      club `rd club strokes` miss_direction `rd club miss dir` rd_avg_yds_to_target rd_avg_yd_diff
##   <date>    <chr>          <int> <chr>          <int>          <dbl>
## 1 2026-05-31 4         8 left          1          220
## 2 2026-05-31 4         8 on_target      3          220
## 3 2026-05-31 4         8 right         4          220
## 4 2026-05-31 5         8 left          2          204.
## 5 2026-05-31 5         8 on_target      3          204.
## 6 2026-05-31 5         8 right         1          204.
```

Plot Metric Summaries

Scoring Metrics


```
scoring_metrics |>
  dplyr::mutate(course_rating = dplyr::case_when(grepl(date_course, pattern = 'Sewailo') ~ 68.9, TRUE ~
    `Handicap Index` = `Handicap Index`*4.5) |>
  dplyr::rename(`Course Rating` = course_rating) |>
```

```

dplyr::group_by(date, date_course, `Handicap Index`) |>
tidyr::pivot_longer(cols = c(`Course Rating`, `Net Score`), names_to = 'metric', values_to = 'value', 'I
ggplot2::ggplot(aes(x = date_course, y = value)) +
ggplot2::geom_point(aes(x = date, y = value, size = 4, alpha = 0.1,
                        color = factor(metric,
                                      levels = c('Handicap Index', 'Course Rating', 'Gross Score', 'I
fill = factor(metric,
              levels = c('Handicap Index', 'Course Rating', 'Gross Score', 'I
ggplot2::geom_line(aes(x = date, y = value, size = 1, alpha = 0.1,
                      color = factor(metric,
                                    levels = c('Handicap Index', 'Course Rating', 'Gross Score', 'I
fill = factor(metric,
              levels = c('Handicap Index', 'Course Rating', 'Gross Score', 'I
ggplot2::geom_smooth(aes(x = date, y = value, group = metric,
                        color = factor(metric,
                                      levels = c('Handicap Index', 'Course Rating', 'Gross Score',
fill = factor(metric,
              levels = c('Handicap Index', 'Course Rating', 'Gross Score', 'I
                        alpha = 0.3, method = 'lm')) +
ggplot2::scale_y_continuous(sec.axis = ggplot2::sec_axis(~./4.5, name = 'Handicap Index'))+
ggplot2::labs(title = paste0('Performance Over Time\n',
                             scores |>
                               dplyr::distinct(date) |>
                               dplyr::last() |>
                               unlist() %>% lubridate::as_date(.) |>
                               as.character(),
                             ' - ',
                             scores |>
                               dplyr::distinct(date) |>
                               dplyr::first() |>
                               unlist() %>% lubridate::as_date(.) |>
                               as.character()),
                  x = 'date',
                  y = 'metric',
                  color = 'metric'
                ) +
ggplot2::guides(alpha = 'none', size = 'none', fill = 'none') +
ggplot2::theme_bw() +
ggplot2::theme(panel.grid.minor = ggplot2::element_blank(),
               axis.title = ggplot2::element_text(face = 'bold'),
               axis.text.y = ggplot2::element_text(face = 'bold'),
               axis.text.x = ggplot2::element_text(face = 'bold', angle = 0, hjust = 0, vjust = 0),
               title = ggplot2::element_text(face = 'bold')
               ) +
ggplot2::scale_x_date(date_breaks = '1 month', date_labels = '%b')

```

Performance Over Time 2025-05-04 - 2026-05-31

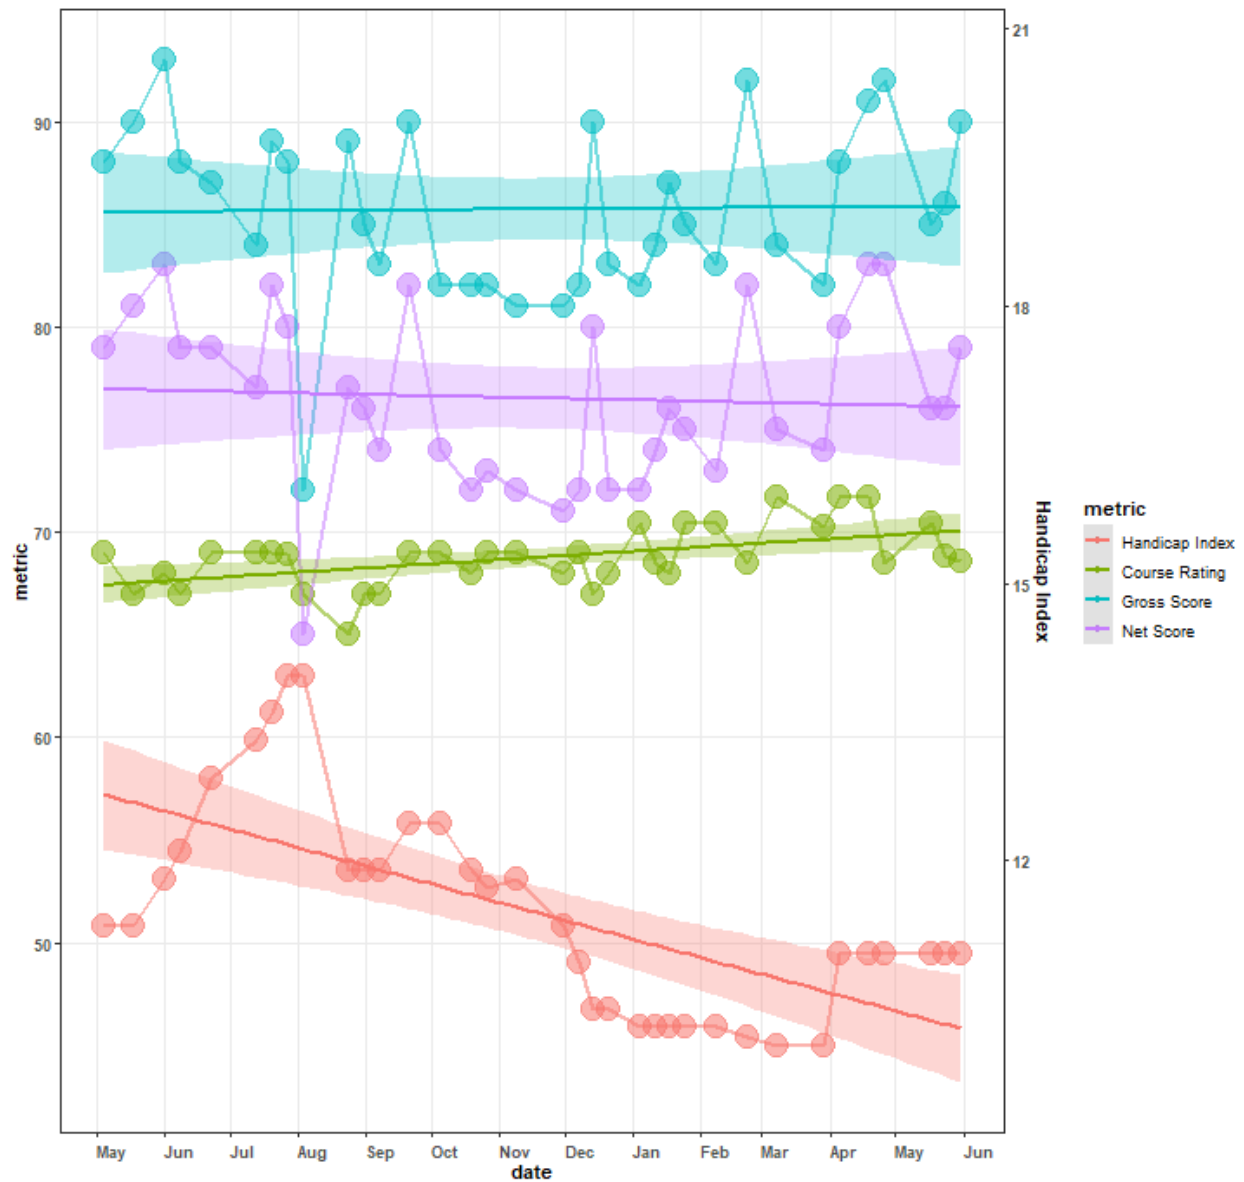

Stroke Metrics


```
stroke_metrics |>
  tidyr::pivot_longer(cols = c(`doubles+`:birdies), names_to = 'metric', values_to = 'value', values_drop_na = T) +
  ggplot2::ggplot(aes(x = date_course, y = value, group = metric, color = metric, fill = metric)) +
  ggplot2::geom_point(aes(x = date, y = value, size = 4, alpha = 0.1), na.rm = T) +
  ggplot2::geom_line(aes(x = date, y = value, size = 1, alpha = 0.1), na.rm = T) +
  ggplot2::geom_smooth(aes(x = date, y = value), alpha = 0.3, method = 'lm') +
  ggplot2::labs(title = paste0('Hole-by-Hole Scores Over Time\n',
                                scores |>
                                  dplyr::distinct(date) |>
                                    dplyr::last() |>
```

```

        unlist() %>% lubridate::as_date(.) |>
        as.character(),
        ' - ',
        scores |>
        dplyr::distinct(date) |>
        dplyr::first() |>
        unlist() %>% lubridate::as_date(.) |>
        as.character()),
    x = 'date',
    y = 'metric',
    color = 'metric', fill = 'metric') +
ggplot2::guides(alpha = 'none', size = 'none') +
ggplot2::theme_bw() +
ggplot2::theme(legend.position = 'none',
               panel.grid.minor = ggplot2::element_blank(),
               axis.title = ggplot2::element_text(face = 'bold'),
               axis.text.y = ggplot2::element_text(face = 'bold'),
               axis.text.x = ggplot2::element_text(face = 'bold', angle = 270, hjust = 0, vjust = 0.5),
               title = ggplot2::element_text(face = 'bold'),
               strip.text.x.top = ggplot2::element_text(face = 'bold'),
               strip.background = ggplot2::element_rect(color = 'black',
                                                         fill = 'white')) +
ggplot2::scale_x_date(date_breaks = '1 month', date_labels = '%b') +
ggplot2::facet_wrap(~factor(metric, levels = c('doubles+', 'bogies', 'pars', 'birdies')), nrow = 1)

```

Hole-by-Hole Scores Over Time 2025-05-04 - 2026-05-31

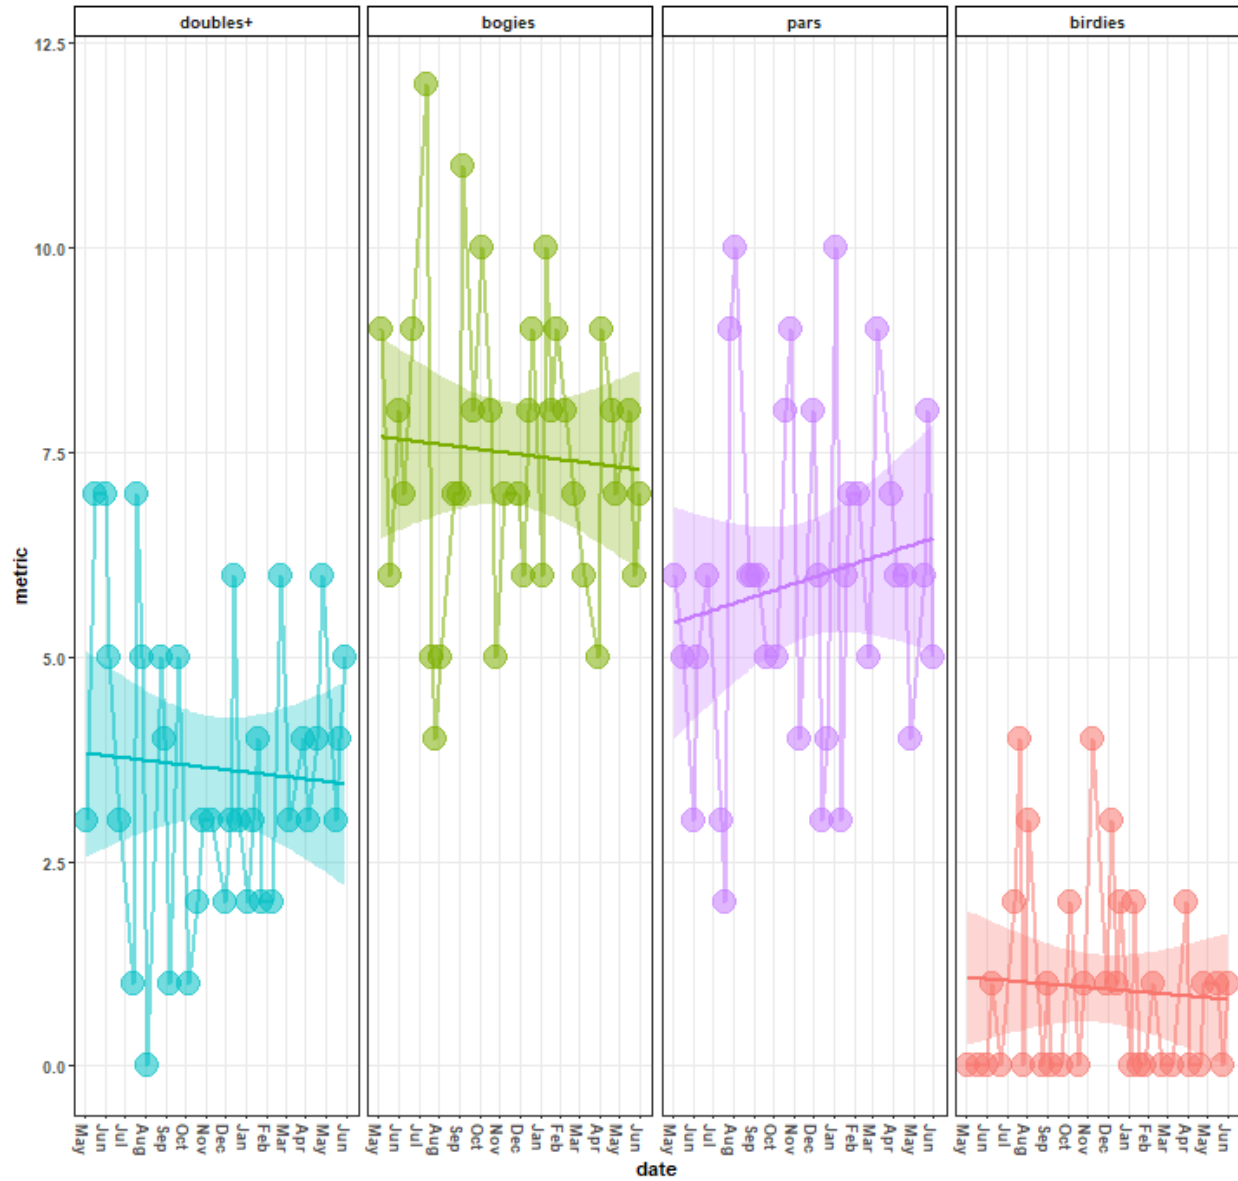

Around the Green Metrics


```
atg_metrics |>
  tidyr::pivot_longer(cols = c(chips:`Avg GIR putts`), names_to = 'metric', values_to = 'value', values_from = 'score') +
  ggplot2::ggplot(aes(x = date_course, y = value, group = metric, color = metric, fill = metric)) +
  ggplot2::geom_point(aes(x = date, y = value, size = 4, alpha = 0.1), na.rm = T) +
  ggplot2::geom_line(aes(x = date, y = value, size = 1, alpha = 0.1), na.rm = T) +
  ggplot2::geom_smooth(aes(x = date, y = value), alpha = 0.3, method = 'lm') +
  ggplot2::labs(title = paste0('Around the Green Metrics Over Time\n',
                                scores |>
                                  dplyr::distinct(date) |>
                                    dplyr::last() |>
```

```

        unlist() %>% lubridate::as_date(.) |>
        as.character(),
        ' - ',
        scores |>
        dplyr::distinct(date) |>
        dplyr::first() |>
        unlist() %>% lubridate::as_date(.) |>
        as.character()),
    x = 'date',
    y = 'metric',
    color = 'metric', fill = 'metric') +
ggplot2::guides(alpha = 'none', size = 'none') +
ggplot2::theme_bw() +
ggplot2::theme(legend.position = 'none',
               panel.grid.minor = ggplot2::element_blank(),
               axis.title = ggplot2::element_text(face = 'bold'),
               axis.text.y = ggplot2::element_text(face = 'bold'),
               axis.text.x = ggplot2::element_text(face = 'bold', angle = 270, hjust = 0, vjust = 0.5),
               title = ggplot2::element_text(face = 'bold'),
               strip.text.x.top = ggplot2::element_text(face = 'bold'),
               strip.background = ggplot2::element_rect(color = 'black',
                                                         fill = 'white')) +
ggplot2::scale_x_date(date_breaks = '1 month', date_labels = '%b') +
ggplot2::facet_wrap(~factor(metric, levels = c('chips', 'putts', 'chips+putts', 'UpAndDown%', 'Avg GII

```

Around the Green Metrics Over Time 2025-05-04 - 2026-05-31

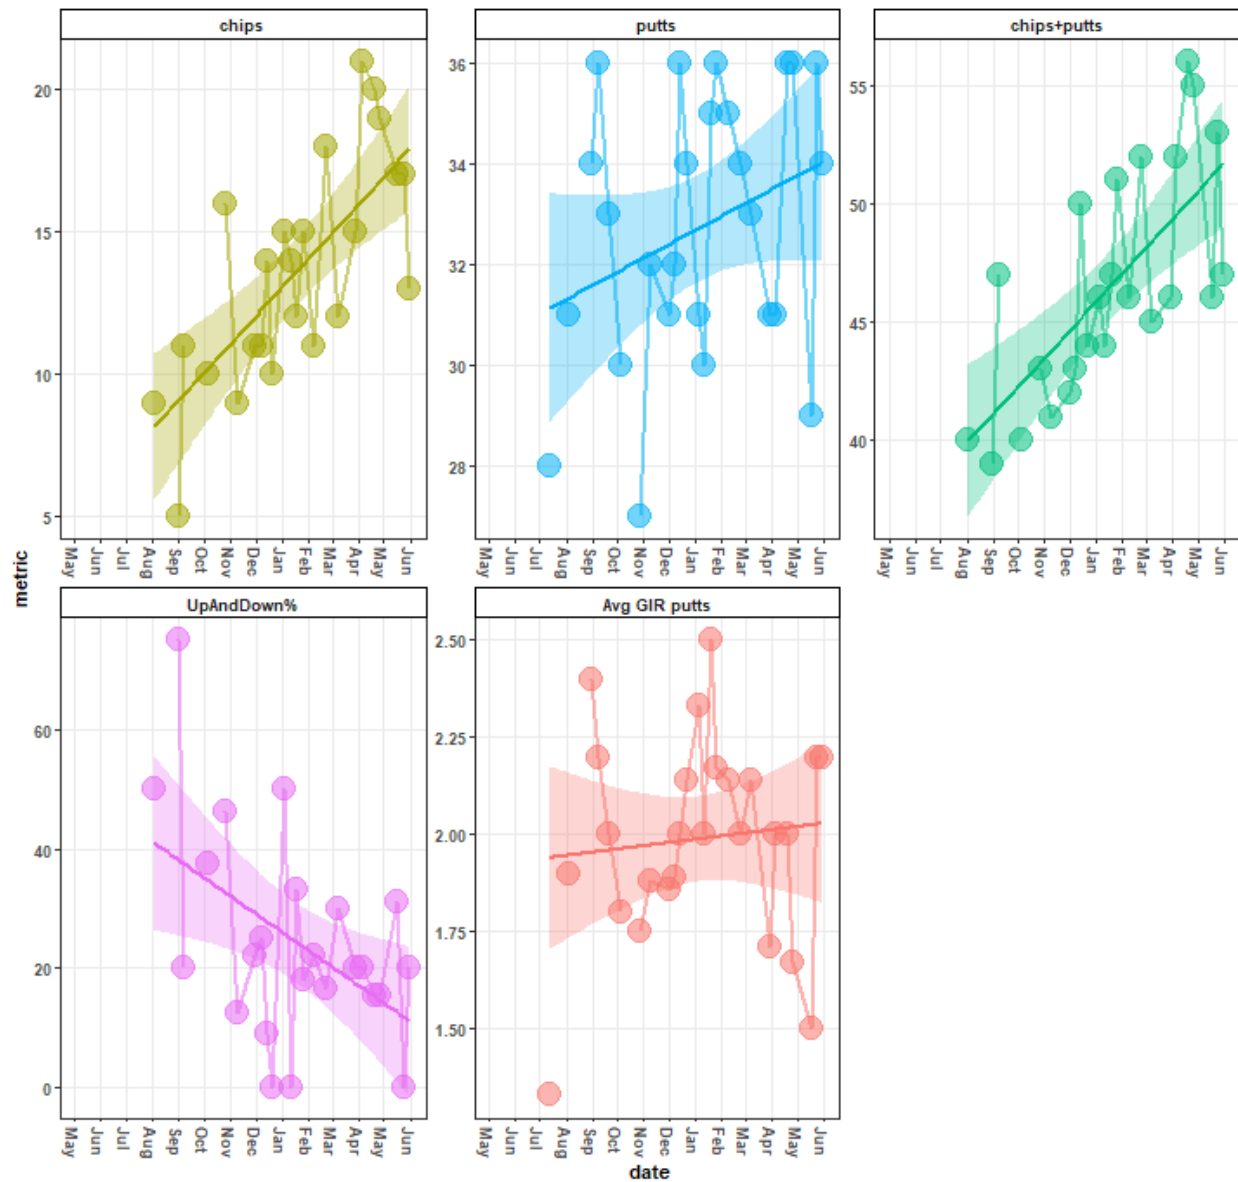

Ball Striking Metrics


```
ball_striking_metrics |>
  tidyr::pivot_longer(cols = c(GIRs:`Driver FIR%`), names_to = 'metric', values_to = 'value', values_drop_na = T) +
  ggplot2::ggplot(aes(x = date_course, y = value, group = metric, color = metric, fill = metric)) +
  ggplot2::geom_point(aes(x = date, y = value, size = 4, alpha = 0.1), na.rm = T) +
  ggplot2::geom_line(aes(x = date, y = value, size = 1, alpha = 0.1), na.rm = T) +
  ggplot2::geom_smooth(aes(x = date, y = value), alpha = 0.3, method = 'lm') +
  ggplot2::labs(title = paste0('Ball Striking Over Time\n',
                                scores |>
                                  dplyr::distinct(date) |>
                                    dplyr::last() |>
```

```

        unlist() %>% lubridate::as_date(.) |>
        as.character(),
        ' - ',
        scores |>
        dplyr::distinct(date) |>
        dplyr::first() |>
        unlist() %>% lubridate::as_date(.) |>
        as.character()),
    x = 'date',
    y = 'metric',
    color = 'metric', fill = 'metric') +
ggplot2::guides(alpha = 'none', size = 'none') +
ggplot2::theme_bw() +
ggplot2::theme(legend.position = 'none',
               panel.grid.minor = ggplot2::element_blank(),
               axis.title = ggplot2::element_text(face = 'bold'),
               axis.text.y = ggplot2::element_text(face = 'bold'),
               axis.text.x = ggplot2::element_text(face = 'bold', angle = 270, hjust = 0, vjust = 0.5),
               title = ggplot2::element_text(face = 'bold'),
               strip.text.x.top = ggplot2::element_text(face = 'bold'),
               strip.background = ggplot2::element_rect(color = 'black',
                                                         fill = 'white')) +
ggplot2::scale_x_date(date_breaks = '1 month', date_labels = '%b') +
ggplot2::facet_wrap(~factor(metric, levels = c('Driver FIRs', 'Iron FIRs', 'FIRs',
                                              'Driver FIR%', 'Iron FIR%', 'FIR%',
                                              'GIRs', 'Par 3 GIRs', 'GIR%')), scales = 'free')

```

Ball Striking Over Time 2025-05-04 - 2026-05-31

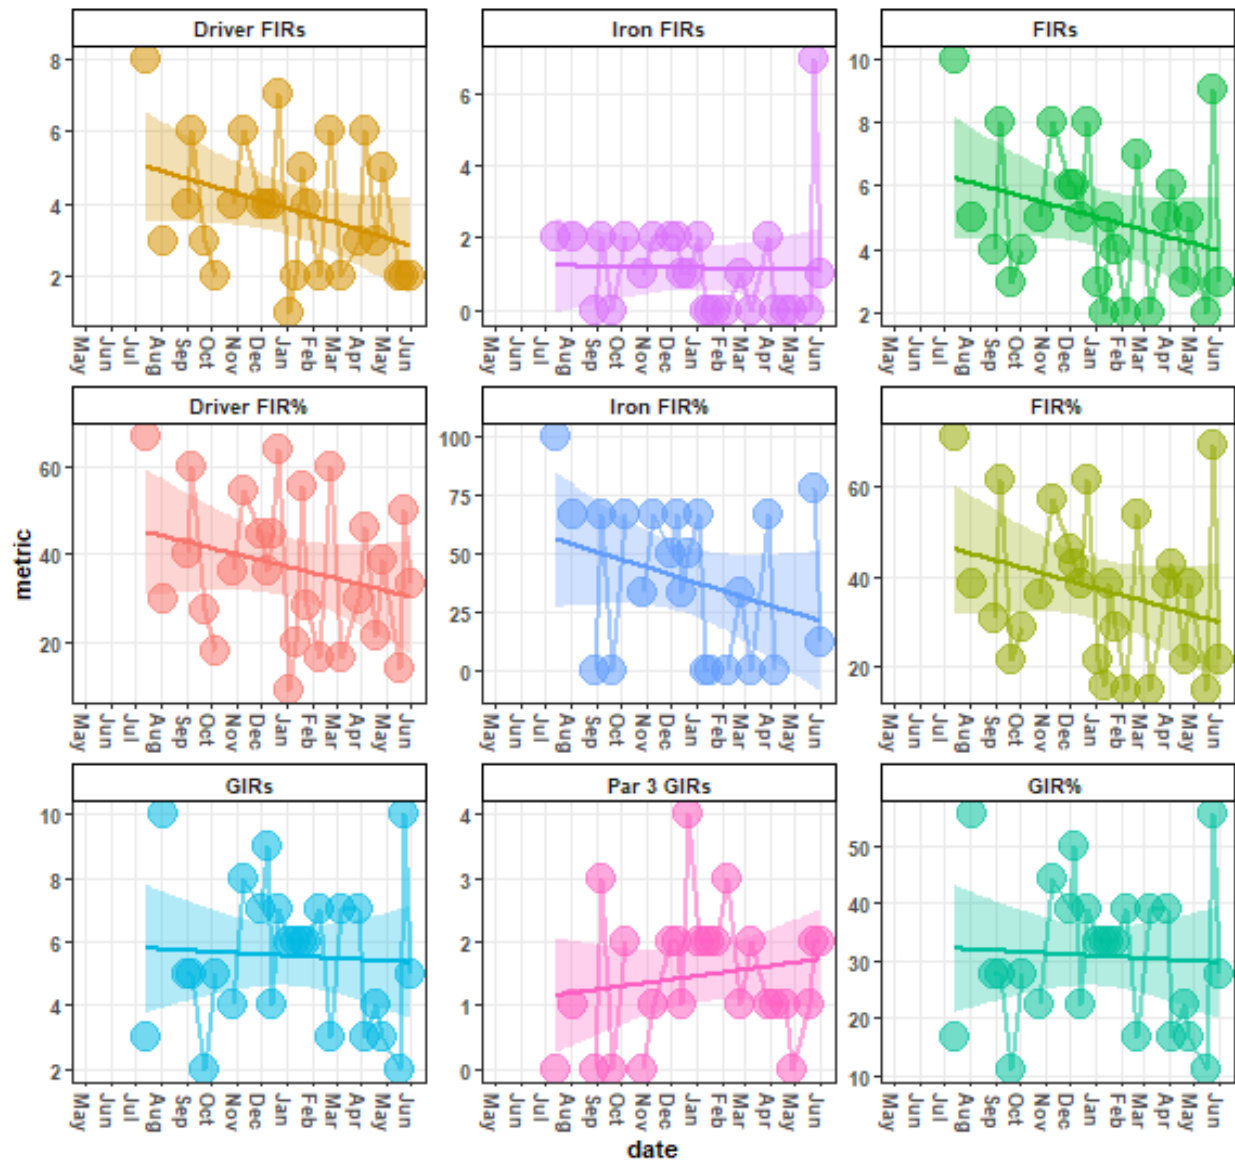

Stroke Quality Metrics

```
stroke_quality_min |>
  dplyr::ungroup() %>%
  dplyr::mutate(dplyr::across(c(date:n), ~as.character(.x))) |>
  tidyr::pivot_longer(cols = c(dplyr::contains('yd')), names_to = 'metric', values_to = 'vals') |>
  dplyr::mutate(metric = dplyr::case_when(
    grepl(metric, pattern = 'target') ~ 'min. target distance',
    grepl(metric, pattern = 'traveled') ~ 'min. shot distance',
    grepl(metric, pattern = 'diff') ~ 'min. \ntarget dist. - shot d

  dplyr::mutate(date = lubridate::as_date(date),
    club = as.character(club),
```


```

      n = as.integer(n)) |>
ggplot2::ggplot(aes(x = date, y = vals, group = metric, color = club, fill = club)) +
ggplot2::geom_point(alpha = 0.4, size = 3) +
ggplot2::geom_line(alpha = 0.4, size = 2) +
ggplot2::geom_smooth(method = 'lm', se = F) +
ggplot2::labs(title = 'Stroke Yardage Minima by Club', x = 'date', y = 'value (yards)', fill = 'club')
ggplot2::guides(alpha = 'none', size = 'none') +
ggplot2::theme_bw() +
ggplot2::theme(title = ggplot2::element_text(face = 'bold', size = 12),
               axis.title = ggplot2::element_text(face = 'bold', size = 10),
               axis.text = ggplot2::element_text(face = 'bold', size = 10),
               axis.text.x = ggplot2::element_text(face = 'bold', size = 7, angle = 270, hjust = 0, vjust = 1),
               legend.position = 'none',
               strip.background = ggplot2::element_rect(fill = 'white'),
               strip.text.y.right = ggplot2::element_text(face = 'bold', size = 9),
               strip.text.x.top = ggplot2::element_text(face = 'bold', size = 10)) +
ggplot2::scale_x_date(date_breaks = 'weeks', date_labels = '%b %d') +
ggplot2::facet_grid(

  rows = vars(metric),

  cols = vars(factor(club, levels = c('D', '3W', '4', '5',
                                     '6', '7', '8', '9',
                                     'PW', 'GW', 'SW', 'LW', 'P'))),
          scales = 'free')

```

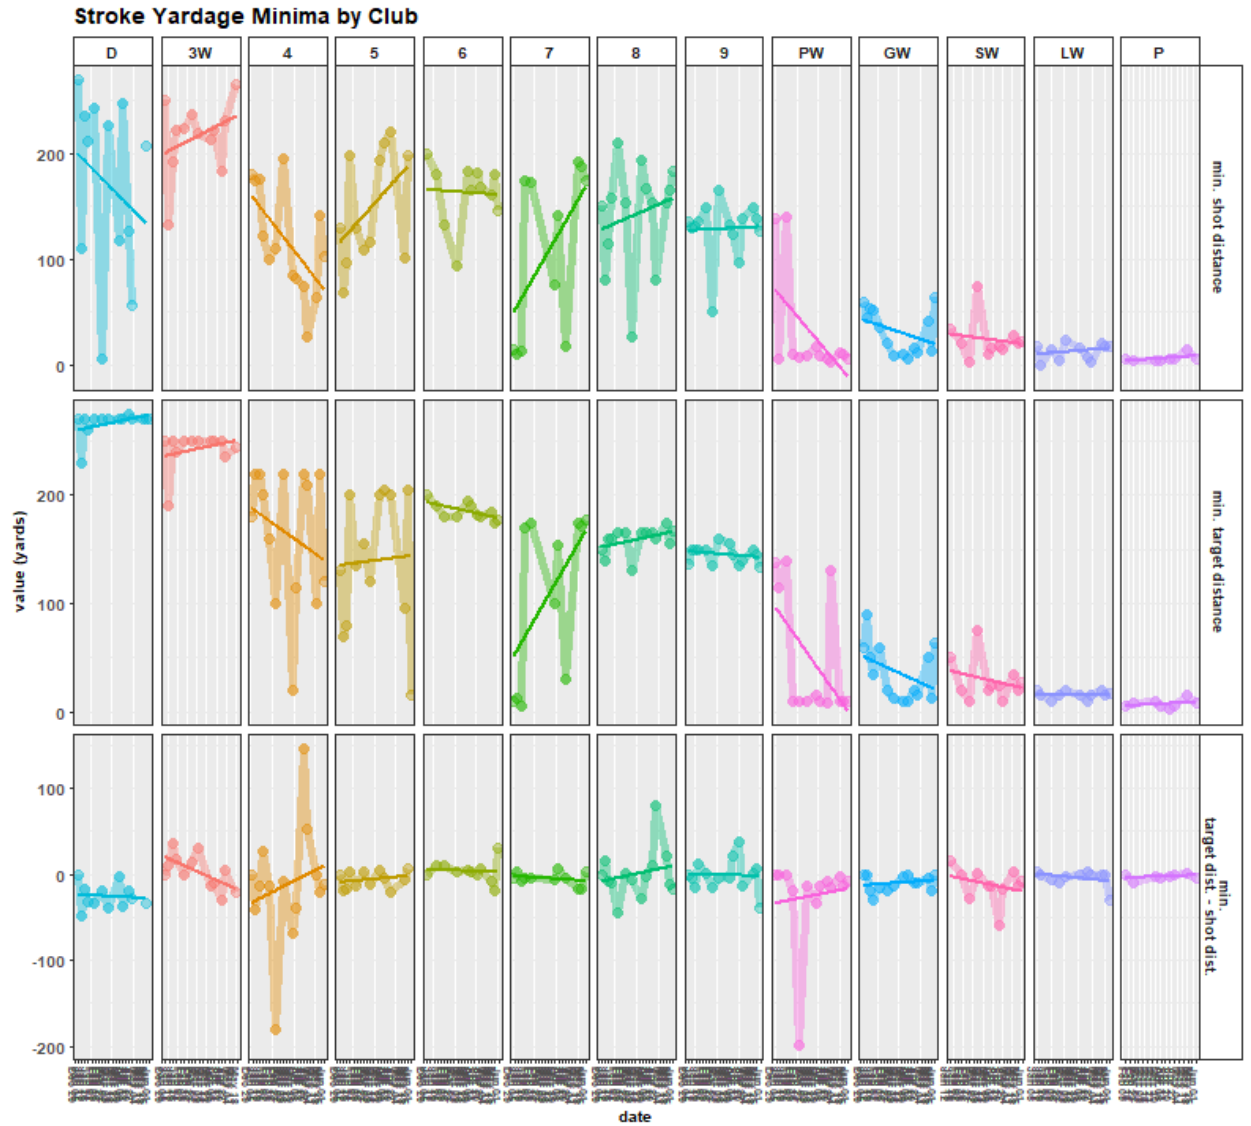

Minima

```
stroke_quality_max |>
  dplyr::ungroup() %>%
  dplyr::mutate(dplyr::across(c(date:n), ~as.character(.x))) |>
  tidyr::pivot_longer(cols = c(dplyr::contains('yd')), names_to = 'metric', values_to = 'vals') |>
  dplyr::mutate(metric = dplyr::case_when(grepl(metric, pattern = 'target') ~ 'max. target distance',
                                          grepl(metric, pattern = 'traveled') ~ 'max. shot distance',
                                          grepl(metric, pattern = 'diff') ~ 'max.\ntarget dist. - shot dist.'))
  dplyr::mutate(date = lubridate::as_date(date),
                club = as.character(club),
                n = as.integer(n)) |>
  ggplot2::ggplot(aes(x = date, y = vals, group = metric, color = club, fill = club)) +
  ggplot2::geom_point(alpha = 0.4, size = 3) +
  ggplot2::geom_line(alpha = 0.4, size = 2) +
  ggplot2::geom_smooth(method = 'lm', se = F) +
  ggplot2::labs(title = 'Stroke Yardage Maxima by Club', x = 'date', y = 'value (yards)', fill = 'club')
```


```

ggplot2::guides(alpha = 'none', size = 'none') +
ggplot2::theme_bw() +
ggplot2::theme(title = ggplot2::element_text(face = 'bold', size = 12),
               axis.title = ggplot2::element_text(face = 'bold', size = 10),
               axis.text = ggplot2::element_text(face = 'bold', size = 10),
               axis.text.x = ggplot2::element_text(face = 'bold', size = 7, angle = 270, hjust = 0, vjust = 1),
               legend.position = 'none',
               strip.background = ggplot2::element_rect(fill = 'white'),
               strip.text.y.right = ggplot2::element_text(face = 'bold', size = 9),
               strip.text.x.top = ggplot2::element_text(face = 'bold', size = 10)) +
ggplot2::scale_x_date(date_breaks = 'weeks', date_labels = '%b %d') +
ggplot2::facet_grid(

  rows = vars(metric),

  cols = vars(factor(club, levels = c('D', '3W', '4', '5',
                                     '6', '7', '8', '9',
                                     'PW', 'GW', 'SW', 'LW', 'P'))),
           scales = 'free')

```

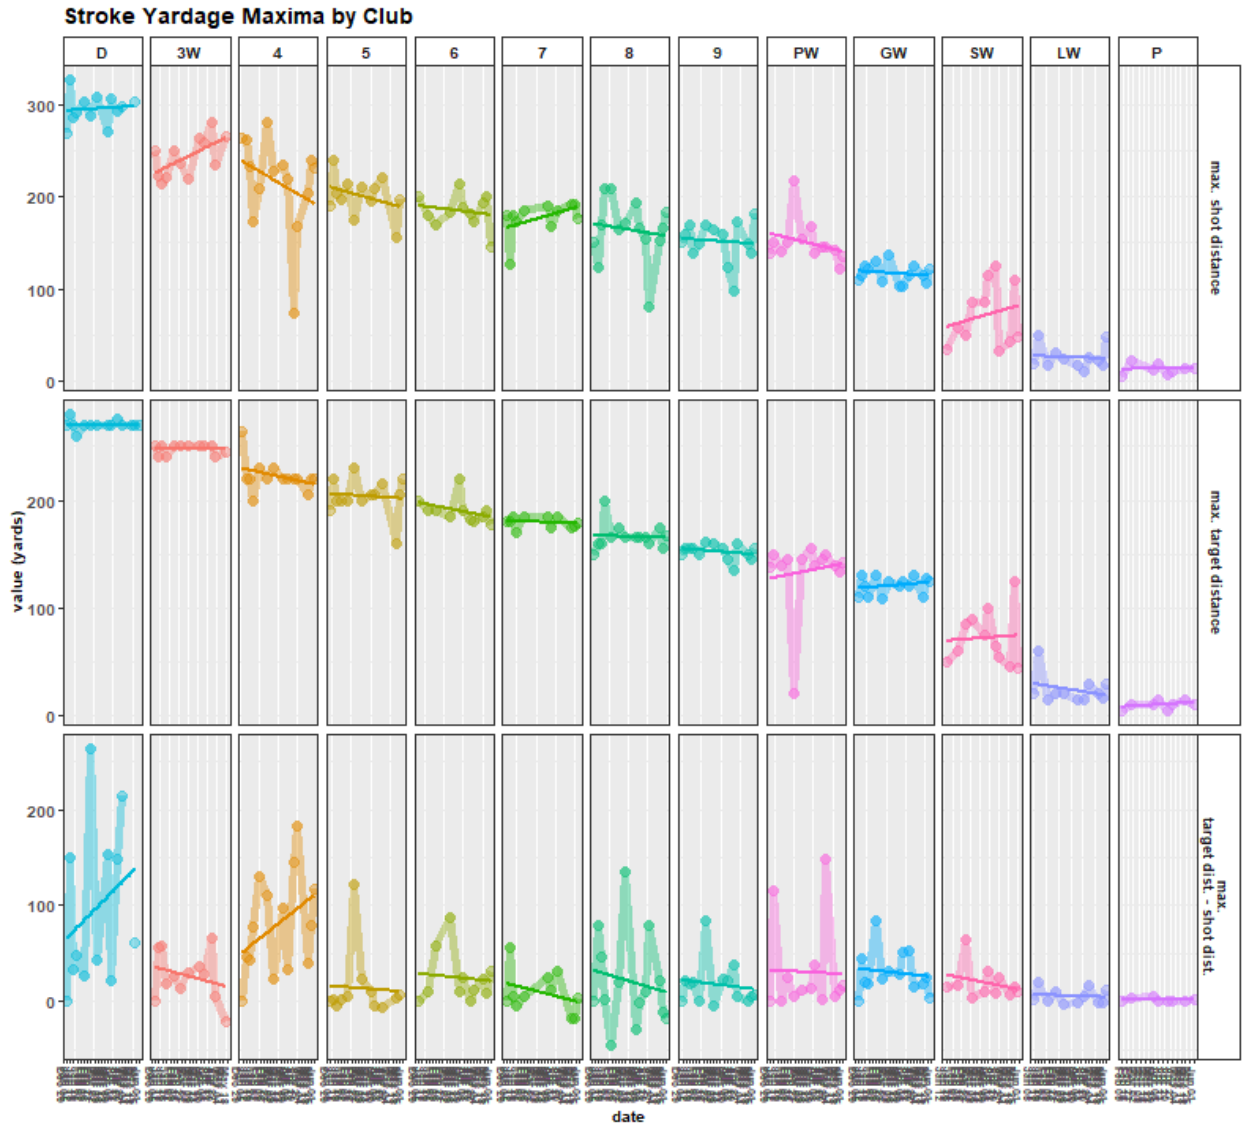


Maxima

```
full_stroke_quality_avg |>
  dplyr::ungroup() %>%
  dplyr::mutate(dplyr::across(dplyr::everything(), ~as.character(.x))) |>
  tidyr::pivot_longer(cols = c(dplyr::contains("rd")), names_to = 'metric', values_to = 'vals') |>
  dplyr::mutate(metric = dplyr::case_when(grepl(metric, pattern = 'target') ~ 'avg. target distance',
    grepl(metric, pattern = 'traveled') ~ 'avg. shot distance',
    grepl(metric, pattern = 'diff') ~ 'avg.\ntarget dist. - shot dist.',
    # grepl(metric, pattern = 'accuracy') ~ 'avg\naccuracy',
    grepl(metric, pattern = 'strokes') ~ 'n strokes',
    grepl(metric, pattern = 'dir') ~ 'strokes w/club\nin round\nby',
    grepl(metric, pattern = 'acc') ~ '% accuracy')) |>
  dplyr::filter(!grepl(metric, pattern = 'strokes')) |>
  dplyr::mutate(date = lubridate::as_date(date),
    club = as.character(club),
    vals = as.numeric(vals))
```

```

    ) |>
  ggplot2::ggplot(aes(x = date, y = vals, group = metric, color = club, fill = club)) +
  ggplot2::geom_point(alpha = 0.4, size = 3) +
  ggplot2::geom_line(alpha = 0.4, size = 2) +
  ggplot2::geom_smooth(method = 'lm', se = F) +
  ggplot2::labs(title = 'Full Stroke Averages by Club', x = 'date', y = 'value (yards or units)', fill = club) +
  ggplot2::guides(alpha = 'none', size = 'none') +
  ggplot2::theme_bw() +
  ggplot2::theme(
    title = ggplot2::element_text(face = 'bold', size = 12),
    axis.title = ggplot2::element_text(face = 'bold', size = 10),
    axis.text = ggplot2::element_text(face = 'bold', size = 10),
    axis.text.x = ggplot2::element_text(face = 'bold', size = 7, angle = 270, hjust = 0, vjust = 1),
    legend.position = 'none',
    strip.background = ggplot2::element_rect(fill = 'white'),
    strip.text.y.right = ggplot2::element_text(face = 'bold', size = 9),
    strip.text.x.top = ggplot2::element_text(face = 'bold', size = 10)) +
  ggplot2::scale_x_date(date_breaks = 'weeks', date_labels = '%b %d') +
  ggplot2::facet_grid(
    rows = vars(metric),
    cols = vars(factor(club, levels = c('D', '3W', '4', '5',
                                         '6', '7', '8', '9',
                                         'PW', 'GW', 'SW', 'LW', 'P'))),
    scales = 'free')

```

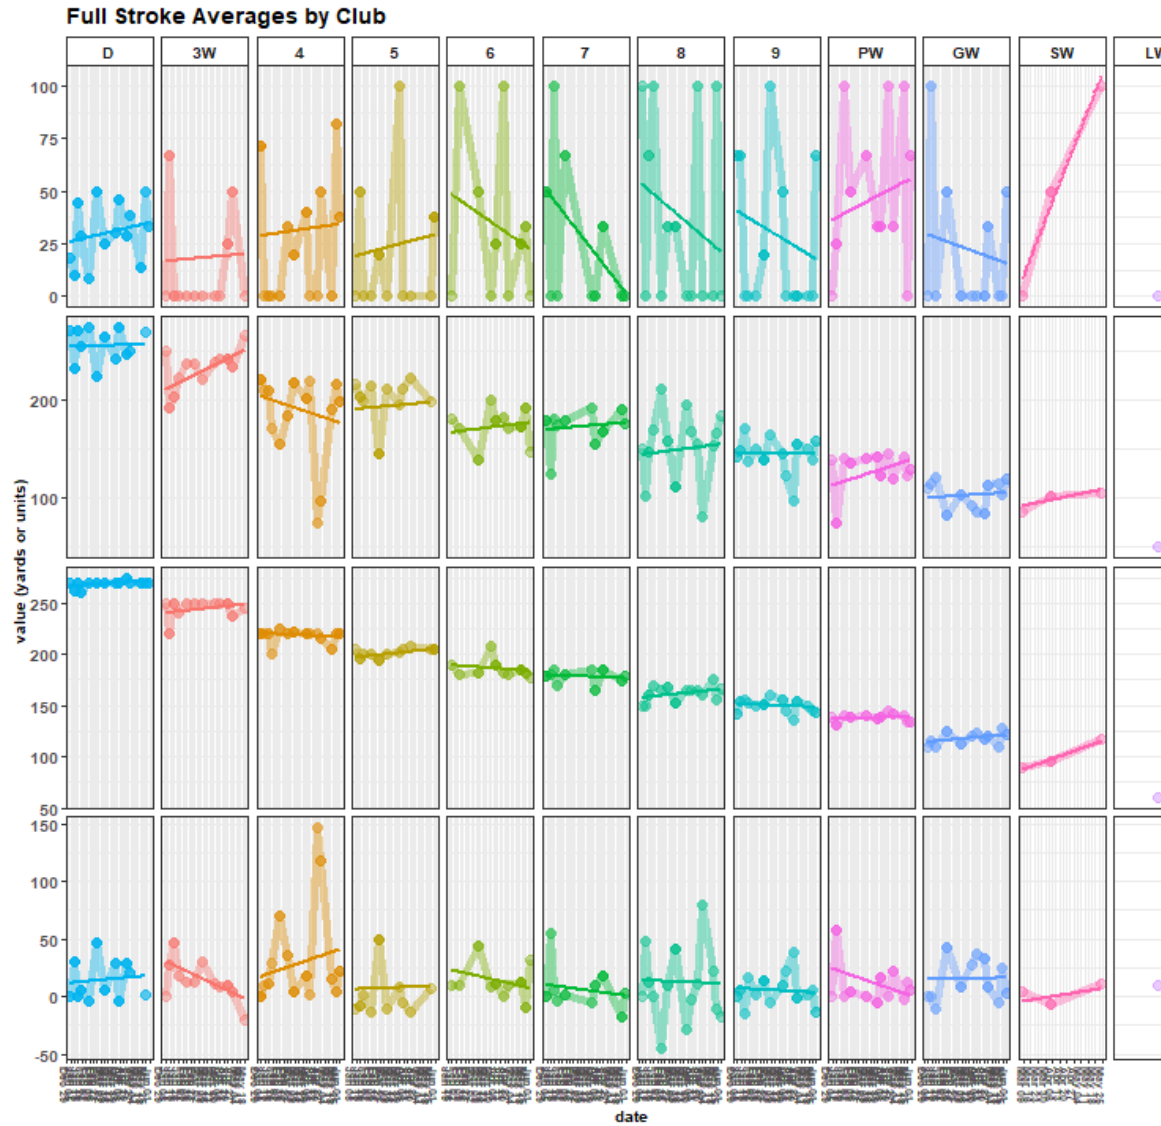

Full Stroke Average

Main Metrics

```
scores_sum |>
  dplyr::mutate(course_rating = dplyr::case_when(grepl(date_course, pattern = 'Sewailo') ~ 68.9, TRUE ~
  tidyr::pivot_longer(cols = c(`Handicap Index`, `Gross Score`, `Net Score`,
    `doubles+`, bogies, pars, birdies, chips, putts,
    `UpDown%`, `Avg GIR putts`, `GIR%`, `Par 3 GIRs`,
    `Iron FIR%`, `Driver FIR%`), names_to = 'metric', values_to = 'value', v
  ggplot2::ggplot(aes(x = date_course, y = value, group = metric, color = metric, fill = metric)) +
  ggplot2::geom_point(aes(x = date, y = value, size = 4, alpha = 0.1), na.rm = T) +
  ggplot2::geom_line(aes(x = date, y = value, size = 1, alpha = 0.1), na.rm = T) +
  ggplot2::geom_smooth(aes(x = date, y = value), alpha = 0.3, method = 'lm') +
  ggplot2::labs(title = paste0('Performance Over Time\n',
    scores |>
      dplyr::distinct(date) |>
      dplyr::last() |>
```

```

        unlist() %>% lubridate::as_date(.) |>
        as.character(),
        ' - ',
        scores |>
        dplyr::distinct(date) |>
        dplyr::first() |>
        unlist() %>% lubridate::as_date(.) |>
        as.character()),
    x = 'date',
    y = 'metric',
    color = 'metric', fill = 'metric') +
ggplot2::guides(alpha = 'none', size = 'none') +
ggplot2::theme_bw() +
ggplot2::theme(legend.position = 'none',
  panel.grid.minor = ggplot2::element_blank(),
  axis.title = ggplot2::element_text(face = 'bold'),
  axis.text.y = ggplot2::element_text(face = 'bold'),
  axis.text.x = ggplot2::element_text(face = 'bold', angle = 270, hjust = 0, vjust = 0.5),
  title = ggplot2::element_text(face = 'bold'),
  strip.text.x.top = ggplot2::element_text(face = 'bold'),
  strip.background = ggplot2::element_rect(color = 'black',
    fill = 'white')) +
ggplot2::scale_x_date(date_breaks = '1 month', date_labels = '%b') +
ggplot2::facet_wrap(~factor(metric,
  levels = c('Handicap Index', 'Gross Score', 'Net Score',
    'doubles+', 'bogies', 'pars', 'birdies',
    'chips', 'putts', 'UpDown%', 'Avg GIR putts',
    'GIR%', 'Par 3 GIRs', 'Iron FIR%', 'Driver FIR%')),
  scales = 'free',
  ncol = 4)

```

Performance Over Time 2025-05-04 - 2026-05-31

