


```
leveldb::anonymous  
_namespace{comparator  
::cc}::BytewiseComparatorImpl  
::Compare
```

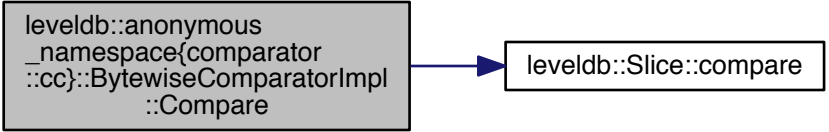

```
graph LR; A["leveldb::anonymous  
_namespace{comparator  
::cc}::BytewiseComparatorImpl  
::Compare"] --> B["leveldb::Slice::compare"]
```

A diagram showing a call from a comparator implementation to a slice comparison function. On the left, a gray box contains the text: `leveldb::anonymous`, `_namespace{comparator`, `::cc}::BytewiseComparatorImpl`, and `::Compare`. A blue arrow points from this box to a white box on the right, which contains the text: `leveldb::Slice::compare`.

```
leveldb::Slice::compare
```