

Institute of Architecture of Application Systems

University of Stuttgart
Universitätsstraße 38
D–70569 Stuttgart

Masterarbeit

Energy and CO₂ footprint of cloud/backend processing

Erisa Hoxha

Course of Study: Computer Science

Examiner: Prof. Dr. Marco Aiello

Supervisor: Prof. Dr. Marco Aiello

Commenced: November 22, 2023

Completed: May 22, 2024

Abstract

Data centers are the backbone of the digital infrastructure and they are responsible for storing and processing large amounts of data. In 2023, global emissions from cloud computing made up from 2.5% to 3.7% of worldwide GHG, thereby exceeding emissions from commercial flights (2.4%). The demand for data centers is increasing exponentially due to high number of users (5.8 billion in October 2023) and rising demand for services and technologies such as streaming, cloud gaming, blockchain, artificial intelligence and machine learning. The emission in this data centers is caused by electricity consumption (to run the servers), water consumption (to run the servers) and the lifetime of the equipment. Many companies have outsourced their tech infrastructure thus their information is being managed more efficiently, but this measure does not remove completely their environmental impact. Different measures are currently being taken from the top three cloud providers: AWS, Microsoft Azure and GCP. AWS leads the list with over 30% market share and they have committed to reaching net zero emissions by 2040. They announced that they will inform their customers about their carbon footprint while continuing to improve emissions release. Azure team is also working to improve their climate impact and are currently trying on a 2-year-old experiment where they have submerged 800 servers on the ocean floor of the Scottish coast. On the other side, GPC, which has the least market share among these three, claims to have already reached net zero emissions. Apart from there, there are many software that are using different algorithm to measure the carbon footprint for data centers.

Contents

1	Introduction	17
1.1	Motivation	17
1.2	Problem statement	18
1.3	Structure	19
2	Background	21
2.1	Energy	21
2.2	Greenhouse gases	23
2.3	Data centers	25
3	Study design	27
3.1	Research questions	27
3.2	Methodology	27
4	Energy used from servers	29
4.1	Energy used for running servers	29
4.2	Energy used for thermal management	30
5	Hardware footprint	35
6	Heading on Level 0 (chapter)	37
6.1	Heading on Level 1 (section)	37
6.2	Lists	38
7	Related Work	41
8	Conclusion and Outlook	43
	Bibliography	45
A	LaTeX Hints	49
A.1	File Encoding and Support of Umlauts	49
A.2	Citations	49
A.3	Formulas and Equations	50
A.4	Sourcecode	51
A.5	Pseudocode	52
A.6	Figures	53
A.7	More Illustrations	53
A.8	Plots with pgfplots	57
A.9	Figures with tikz	57
A.10	UML diagrams using tikz-uml	58

A.11	UML diagrams using PlantUML	58
A.12	Linguistic Forests	58
A.13	Tables	58
A.14	Tables spanning multiple pages	60
A.15	Abbreviations	62
A.16	References	63
A.17	Definitions	63
A.18	Footnotes	63
A.19	Various Things	63
A.20	Closing remarks	64

List of Figures

1.1	Total Data Traffic Forecast through 2030. Source: “Impact of AI on Electronics and Semiconductor Industries”, IBS, April 2020	17
1.2	Data Center distribution worldwide	18
1.3	Source Statista[24b]	20
2.1	Analysis of a typical 465 m2 data center, Source Emerson Network power[Eme15]	22
2.2	The power flow and heat flow in general data centers [JBY+20]	23
2.3	Greenhouse gas emissions, 2022 [RRR23a]	24
2.4	Diagrammatic representation of the DC’s overall structure[ZZG+23b]	26
4.1	Recalibrating global data center energy-use estimates[MSL+20]	29
4.2	Single-phase submerged liquid cooling, Two-phase submerged liquid cooling.; Source: [LSW+23]	33
5.1	The range of PUE; Source: IDC Foresight Industry Research Institute	36
A.1	Example Choreography	53
A.2	Example Choreography	54
A.3	Example to place 3 illustrations next to each other. Further, it is possible to reference each separately.	54
A.4	Example Choreography I	55
A.5	Example Choreography II	56
A.6	Plot of $\sin(x)$ directly inside the figure environment with pgfplots.	57
A.7	Coordinates x and y read from csv file and plotted pgfplots.	57
A.8	A regular grid generated easily with two for loops.	58
A.9	Class diagram generated with tikz-uml. Example adapted from Nicolas Kielbasiewicz.	59

List of Tables

A.1	Example Table	59
A.2	Example table for 4 constraints (W-Z), each having 4 parameters with (M und SD). Note: use always the same number of decimal places.	60
A.3	Table directly generated from the values of a csf file.	60
A.4	A sample long table.	60

List of Listings

A.1	The code is separated by two horizontal lines in the listings environment.	51
-----	--	----

List of Algorithms

A.1	Sample algorithm	52
A.2	Description	53

Acronyms

ER error rate. 62

FR Fehlerrate. 62

RDBMS Relational Database Management System. 62

1 Introduction

1.1 Motivation

Climate change is one of the hottest topics of this century. GHG contribute the most in heating of the planet. It is estimated that data centers alone cause 3.7% of all greenhouse emissions, thus exceeding the emissions from commercial flights in 2022. The demands for IT services and technologies have been increasing with the advancements of machine learning, AI, cloud gaming, streaming etc. Data storage is estimated to reach 175ZB in 2025[Zho21]. This growth of data processing and data storage has improved the quality of our life, but at the same time hundreds of MtCO₂ are released yearly from this. As of today, USA has the largest number of data centers in the world with more than 2000 sites, thus causing highest carbon footprint per country based. While in the beginning of the century these data centers were not build thinking about their environmental impact, this has seemed to change in the recent years. There have been improvements in the way data centers are build, where they are build and there has been refinement in the hardware used. So the same algorithm can be executed in less power consumption. Many institutions have already migrated their services to clouds and decreasing their overall footprint. With big cloud providers like AWS, companies can decide where they want to host their services and can track their environmental

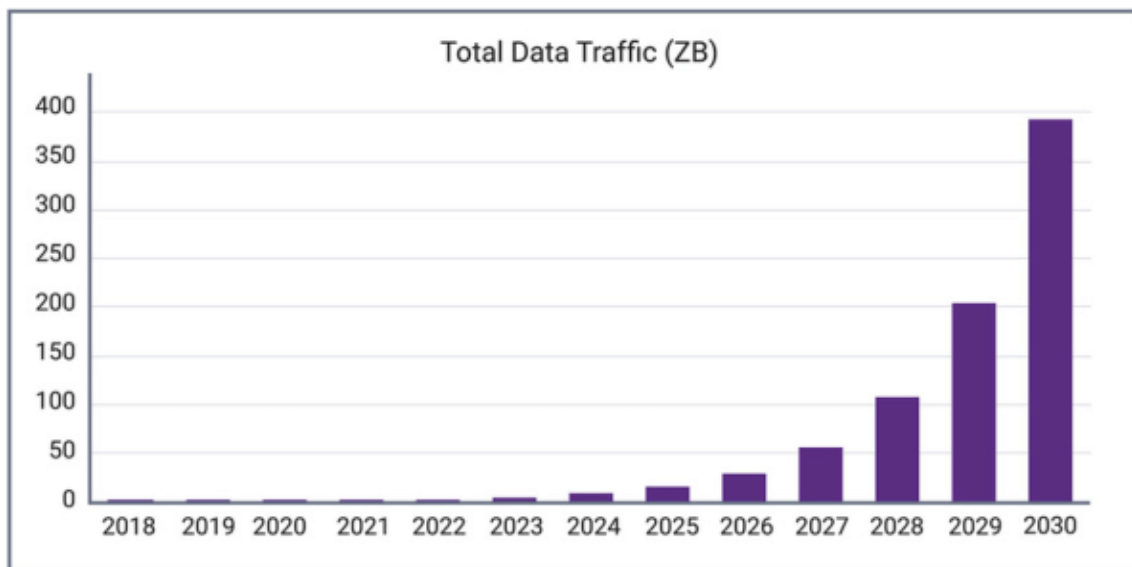


Figure 1.1: Total Data Traffic Forecast through 2030. Source: “Impact of AI on Electronics and Semiconductor Industries”, IBS, April 2020

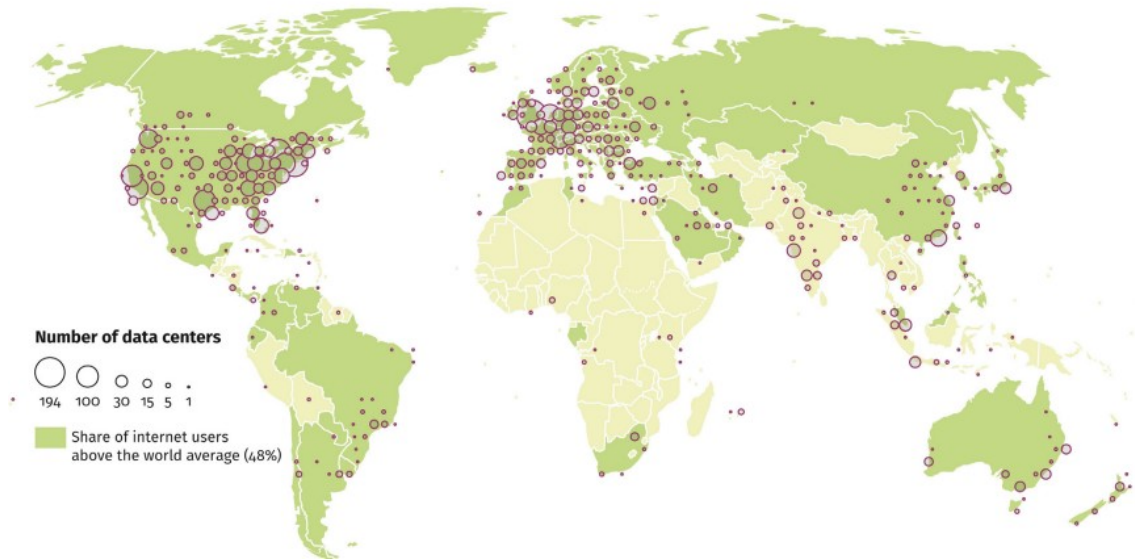


Figure 1.2: Data Center distribution worldwide

effect while the resources are being managed more efficiently. Big companies have advanced in reducing carbon release and Google today uses 100% green energy. But other smaller companies still do not have the right mastery energy management.

Instructions that that a computer what actions to perform are mainly softwares[24a]. Software does not consume energy by itself directly, it directs and influences the operations of hardware, therefore causing carbon emissions. In a survey committed by programmers, only 18% of them stated that they build these programs with efficiency in mind. Considerable work has been done in the development of software with sustainability at its core, thanks to the advancements made in Software Engineering for Sustainability (SE4S). Nevertheless, since this is a relatively new field of study, there is still a significant amount of work to be carried out in this area.

IT in some way has improved our lives in terms of: Life Satisfaction (Trust and Safety), Mobility (Culture and Sports), Integration (Sustainability) and Public Services[NLA19]. Now we can attend a company meeting from the comfort of our own homes instead of commuting to office and therefore lowering overall carbon release. Also there exist data centers that are just tackling the CO₂ release itself. So, IT has done more good in terms of carbon emissions, but with the newest researches, the situation can be improved a lot still in terms of electricity production, space and thermal management. GeSISmarter report from 2020 stated the that greenhouse gas emissions can be reduced by 16.5% (9.1GtCO₂) with effective use of IT[Cos19].

1.2 Problem statement

In 2006, the British mathematician and entrepreneur Clive Humby coined the phrase “Data is the new oil” [Hum06]. Michael Palmer expanded on Humby’s quote by saying, “like oil, data is valuable, but if unrefined it cannot really be used [Oil] has to be changed into gas, plastic, chemicals,

etc to create a valuable entity that drives profitable activity; so, data must be broken down and analyzed for it to have value”[Pal06]. As of March 2024 there are currently 10593 data centers worldwide with US leading this with 5381 data centers[24b].

Data centers constructed in the past did not take into consideration the environmental considerations. However, as the demand for various products, systems, and activities grew, it became evident that they had a significant carbon footprint. [ZZG+23a] concluded:

1. Approximately 20–40% of the energy consumed by DC can be reduced by optimizing IT equipment, including server layout adjustment, virtualization technology, and storage equipment improvement.
2. Approximately 15–27% of the energy consumed by DC can be reduced via research and development of advanced cooling technologies, including natural cooling and liquid cooling to achieve sustainability.
3. DCs’ ECER strategies are affected by the differences in geographical location, natural resources and economic basis, and the single energy-saving method is difficult to meet the goal of zero-carbon emission.
4. The key challenges and potential opportunities in the future decarbonization path of DCs are summarized from the perspectives of policy reform, technological innovation, and resource diversification and management, which is great significance to the realization of zero-carbon DCs and the sustainable development of human society.

1.3 Structure

In the following, the structure is outlines as follows:

- Chapter 2 is the background of this all this and has three subpoints: Energy, Greenhouse Gases and Data Centers
- Chapter 3 is the Study Design along where I included my research questions and the methodology in my research used to find answers for those questions
- Chapter 4 is about all about Energy. In this chapter I studied separately the energy used for running servers and energy used for cooling
- Chapter 5 is the hardware footprint of data centers in years
- Chapter 6 is about Cloud and Virtualization and answers the research question 4
- Chapter 7 is about Energy saved from data centers and clouds and the concept of Carbon-Free Energy Data centers
- Chapter 8 - here there are the conclusions from my my research



Figure 1.3: Source Statista[24b]

2 Background

We start with providing insights into relevant background knowledge of this thesis. The relevant topics include: "data center", "data center carbon footprint", "data center energy consumption", "data center sustainability", "cloud efficiency", "energy conservation and emission reduction technology", "server thermal management", "cooling in data centers", "liquid cooling".

2.1 Energy

The energy consumption of servers serves as the fundamental metric for assessing power and heat flow within data centers. In these environments, the interplay between IT equipment and cooling systems is tightly intertwined due to thermal considerations. In the context of China, data centers have reached a notable level of energy consumption, with their combined usage ranging between 120 and 130 billion kWh. This accounts for approximately 2% of the total electricity consumption in the country. Similarly, in 2014, data centers in the United States consumed an estimated 70 billion kWh, representing roughly 1.8% of the nation's overall electricity usage.[JBY+20].

The data center's energy consumption primarily stems from two main components: IT equipment and cooling equipment, which collectively account for approximately 90% of the total energy usage[JBY+20]. Figure 2.2 provides an illustration of the dynamics of energy and air flows within a data center. This visual representation offers valuable insights into the aspects of data center operations and highlights the interplay between energy consumption and airflow management. IT equipment, including servers, storage devices, and networking infrastructure, represents a significant portion of the energy consumed within a data center. These electronic devices require power to operate efficiently and process the vast amounts of data they handle. The energy consumed by IT equipment is influenced by factors such as the number of devices, their processing power, and their utilization rates[KBB+16]. Additionally, cooling equipment plays a crucial role in maintaining optimal operating conditions within the data center environment. As IT equipment generates heat during operation, cooling systems, such as air conditioning units and precision cooling systems, are employed to regulate temperatures and prevent overheating. The energy consumed by cooling equipment is necessary to ensure the reliability and performance of the IT infrastructure[RZX+16].

Energy can be generated from various sources. Some of the most common methods of energy generation:

Fossil Fuels: Fossil fuels such as coal, oil, and natural gas are burned to produce heat, which is then used to generate electricity. This process is commonly used in power plants[RR17].

Nuclear Energy: Nuclear power plants use a process called nuclear fission to generate heat. The heat produced by splitting atoms is used to create steam, which drives turbines and generates electricity[RRR23b].



Figure 2.1: Analysis of a typical 465 m2 data center, Source Emerson Network power[Eme15]

Renewable Sources: Renewable energy sources include solar, wind, hydroelectric, geothermal, and biomass. Solar energy is generated by converting sunlight into electricity using photovoltaic cells. Wind energy is harnessed by wind turbines that convert the kinetic energy of the wind into electricity. Hydroelectric power is generated by capturing the energy of flowing or falling water. Geothermal energy utilizes the heat from the Earth's interior to generate electricity. Biomass energy is produced by burning organic matter such as wood, agricultural crops, or waste materials[RRR20].

Hydropower: Hydropower is a specific type of renewable energy that generates electricity through the force or energy of moving water, such as rivers or waterfalls. It involves the use of dams or flow-through turbines to convert the kinetic energy of moving water into electrical energy[SBI+13].

Tidal and Wave Energy: Tidal energy is generated by harnessing the power of ocean tides, while wave energy is generated by capturing the energy of ocean waves. Both methods involve specialized technologies to convert the mechanical energy of water into electricity[KKAH17].

Fuel Cells: Fuel cells generate electricity through an electrochemical process, usually by combining hydrogen with oxygen to produce water and electricity. Fuel cells can use hydrogen derived from various sources, including natural gas, biomass, or renewable energy[MSS12].

It's important to note that the availability and utilization of different energy sources can vary depending on factors such as geographical location, technological advancements, and economic considerations[FFN+20][KOW+19][AKK15]. The transition toward renewable and sustainable energy sources is gaining momentum globally due to concerns about climate change and the finite nature of fossil fuel resources[QHR+19].

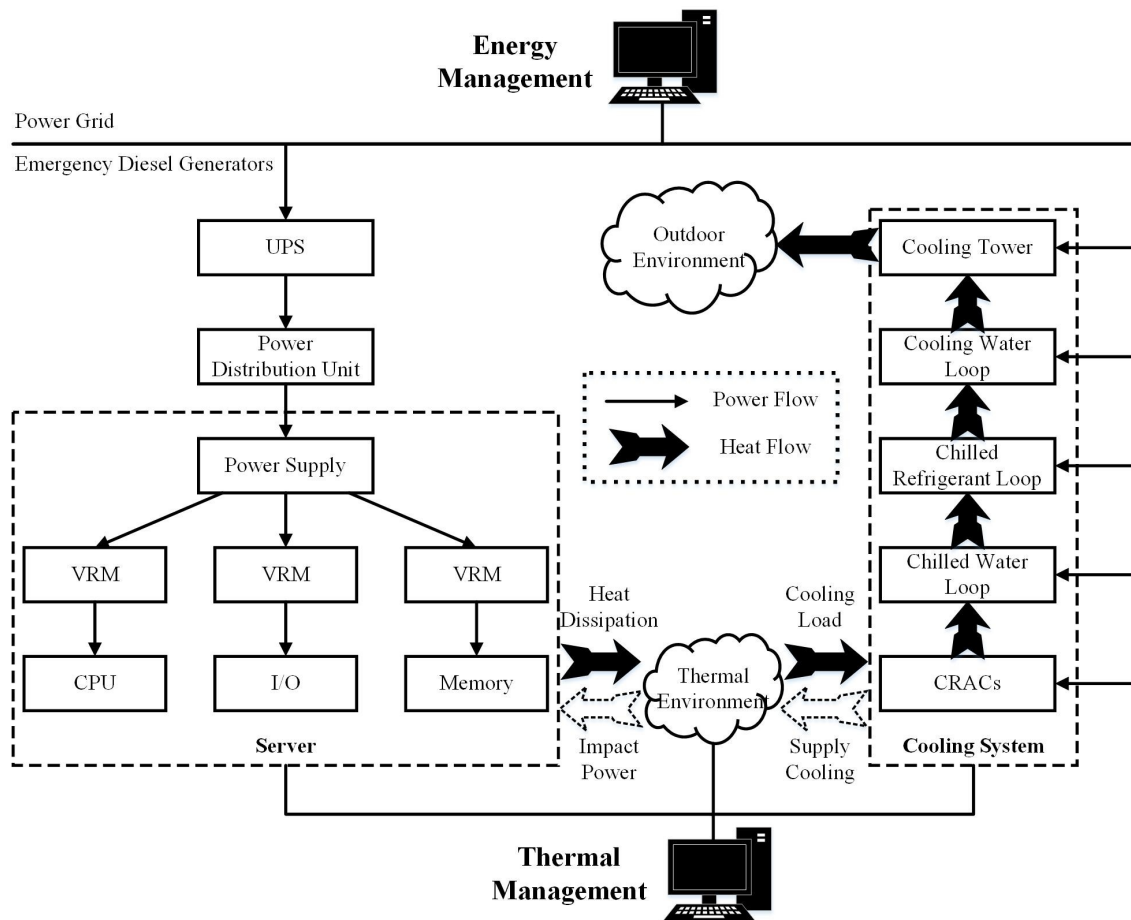


Figure 2.2: The power flow and heat flow in general data centers [JBY+20]

2.2 Greenhouse gases

United Nations Climate Change Conference (COP26) held in Glasgow reached an agreement to ensure global net zero emissions by mid-century and to reduce global emissions by 45% by 2030[AM21].

Greenhouse gases are gases in the atmosphere that absorb and emit radiation within the thermal infrared range. This process is the fundamental cause of the greenhouse effect. Carbon dioxide (chemical formula CO_2) is an important greenhouse gas, which contributes 9%–26% of the greenhouse effect.

The greenhouse gasses included in CO_2e calculations are[Dio17]:


- Carbon dioxide (CO_2)
- Nitrous oxide (N_2O)
- Methane (CH_4)
- Fluorinated Gases

2 Background

Greenhouse gas emissions, 2022



Greenhouse gas emissions¹ include carbon dioxide, methane and nitrous oxide from all sources, including land-use change. They are measured in tonnes of carbon dioxide-equivalents² over a 100-year timescale.

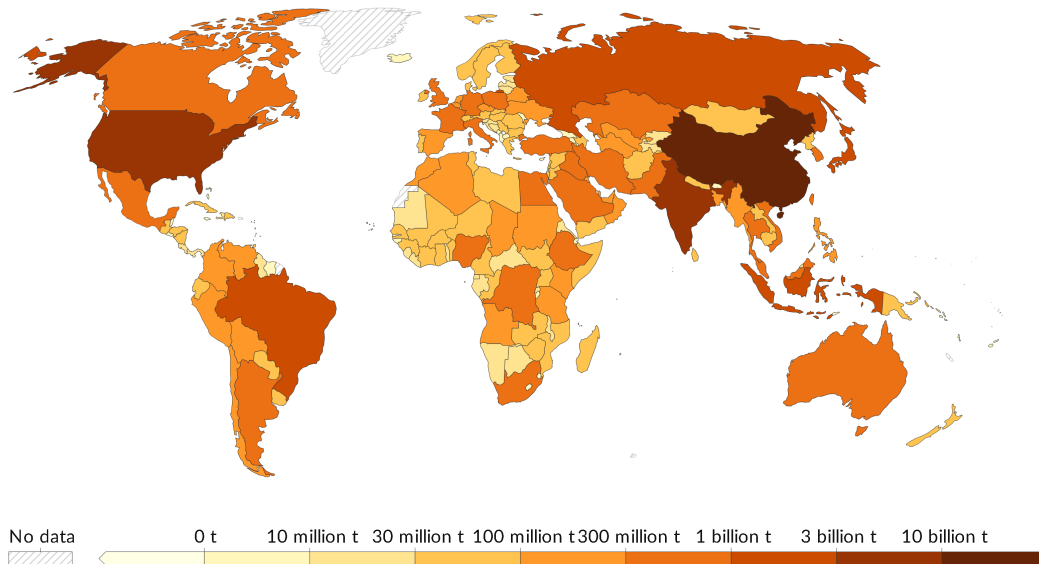

Data source: Jones et al. (2024)

OurWorldInData.org/co2-and-greenhouse-gas-emissions | CC BY

Note: Land-use change emissions can be negative.

1. **Greenhouse gas emissions:** A greenhouse gas (GHG) is a gas that causes the atmosphere to warm by absorbing and emitting radiant energy. Greenhouse gases absorb radiation that is radiated by Earth, preventing this heat from escaping to space. Carbon dioxide (CO₂) is the most well-known greenhouse gas, but there are others including methane, nitrous oxide, and in fact, water vapor. Human-made emissions of greenhouse gases from fossil fuels, industry, and agriculture are the leading cause of global climate change. Greenhouse gas emissions measure the total amount of all greenhouse gases that are emitted. These are often quantified in carbon dioxide equivalents (CO₂eq) which take account of the amount of warming that each molecule of different gases creates.

2. **Carbon dioxide equivalents (CO₂eq):** Carbon dioxide is the most important greenhouse gas, but not the only one. To capture all greenhouse gas emissions, researchers express them in "carbon dioxide equivalents" (CO₂eq). This takes all greenhouse gases into account, not just CO₂. To express all greenhouse gases in carbon dioxide equivalents (CO₂eq), each one is weighted by its global warming potential (GWP) value. GWP measures the amount of warming a gas creates compared to CO₂. CO₂ is given a GWP value of one. If a gas had a GWP of 10 then one kilogram of that gas would generate ten times the warming effect as one kilogram of CO₂. Carbon dioxide equivalents are calculated for each gas by multiplying the mass of emissions of a specific greenhouse gas by its GWP factor. This warming can be stated over different timescales. To calculate CO₂eq over 100 years, we'd multiply each gas by its GWP over a 100-year timescale (GWP100). Total greenhouse gas emissions – measured in CO₂eq – are then calculated by summing each gas' CO₂eq value.

Figure 2.3: Greenhouse gas emissions, 2022 [RRR23a]

A data center consumes significant amount of power and a mass of greenhouse gas is produced in the process of power generation. According to US Energy Information Administration[23], about 0.86 pounds (0.39 kg) of CO₂ is released per kWh. Below is the descriptive map greenhouse emissions for each country.

Measuring CO₂ emissions from data center computing presents challenges due to the intricate nature of data center infrastructure and the various factors that influence CO₂ production, including data center efficiency and energy sources used[WK13]. [ABA21] estimated that 720 million tons of CO₂ emissions will be released by data centers only in 2030. The amount of CO₂ generated by data centers is influenced by multiple factors, with data center efficiency and energy sources being key variables. These variables can vary significantly across different data centers, making it difficult to accurately measure CO₂ emissions. Additionally, data centers are complex environments with

shared infrastructure utilized by multiple users and managed support systems, further complicating the precise calculation of CO2 emissions attributed to individual applications, users, or computing servers.

2.3 Data centers

A data center is a physical room, building or facility that houses IT infrastructure for building, running, and delivering applications and services, and for storing and managing the data associated with those applications and services[IBM24].

In Figure 2.4, we can observe the hierarchical structure of the data center (DC), which is divided into three distinct layers. Starting from the top layer, we find the core switches responsible for receiving data service instructions and transmitting them to the front-end servers through the network. Moving down to the middle layer, we encounter the aggregation switches, which serve as the connection point between the top and bottom layers. Their primary function is to facilitate the consolidation of data from various sources. Finally, at the base layer, we have the front-end and back-end servers. The front-end servers handle user instructions and requests, while the back-end servers allocate storage nodes[ZZG+23b].

The main objective of the DC is to effectively integrate and centralize network and storage resources using virtualization technology. This integration allows for efficient data processing. Additionally, the DC employs network node virtual functions to monitor, manage, and oversee the performance of individual nodes within the network. By leveraging these technologies, the DC is able to streamline operations and optimize resource allocation for enhanced performance[ZZG+23b].

Spending on data center systems is expected to see a notable jump in growth from 2023 (4%) to 2024 (10%), in large part due to planning for generative AI GenAI[STA24].

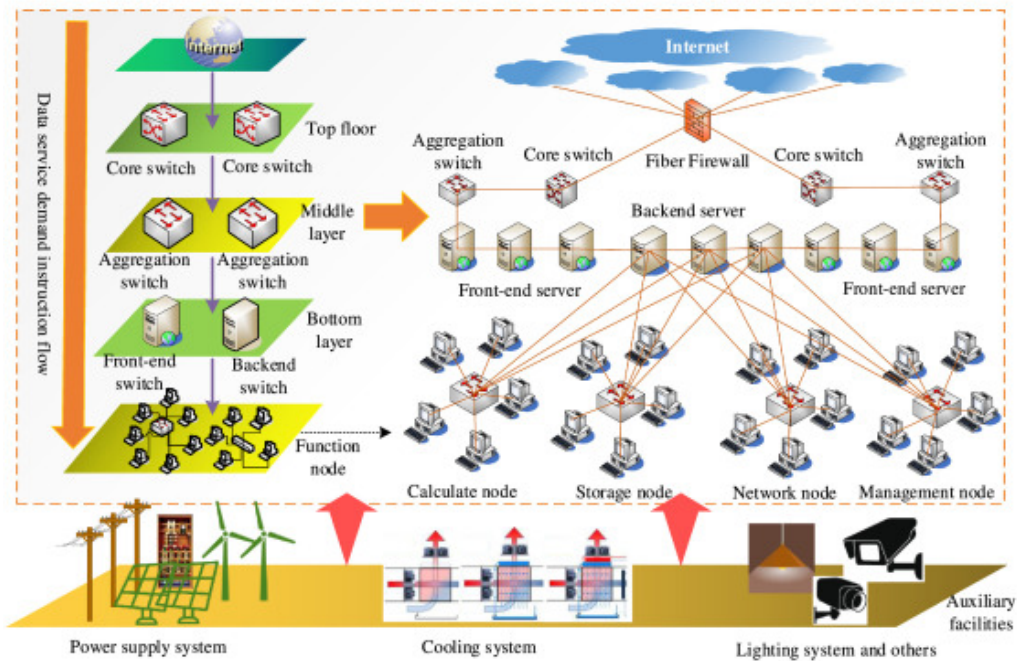


Figure 2.4: Diagrammatic representation of the DC's overall structure[ZZG+23b]

3 Study design

3.1 Research questions

- RQ1** How much GHG do data centers currently produce, and what can be an estimate of the GHG production for the upcoming years?
- RQ2** Study of the emission causes in data centers, focusing on factors like electricity, cooling and physical hardware fragments.
- RQ3** Introduction to carbon footprint and study of the (existing) measures for the reduction of carbon footprint.
- RQ4** How can outsourcing to cloud computing reduce the environmental impact?
- RQ5** Study of the DCIM Software for carbon footprint measuring and evaluation of the software's accuracy via experiments.

3.2 Methodology

When I started conducting my research about energy and CO₂ of cloud/backend processing, I saw that the most energy consumption comes from this massive server rooms that would process data non stop, called data centers. So I focused my study on data centers, their infrastructure and the energy that these rooms were consuming. Servers are the primary powerhouses within data centers. In this thesis I tried to include the latest publicly available research or development of the specific topic because some old papers were not relevant anymore. There were many old publications about data centers and their energy consumption, whose outcome was already applied in real life several times or their outcome was overridden. Papers and publications used in this thesis are related to electrical engineering, thermal engineering and climate change. As a resource for this thesis I also checked the activity of main cloud providers such as AWS, Google and Microsoft. Even though these companies are working independently from each other, they have all made huge advancements in their common goal to reach net zero carbon emissions.

4 Energy used from servers

According to a report published by the International Energy Agency[IEA23] in 2023, data centers worldwide were estimated to consume approximately 1-1.5% of the world's electricity. While this figure may seem relatively modest, it assumes significance when considering the overall global energy consumption. Additionally, as our reliance on digital services continues to grow and more devices become interconnected, the demand placed on data centers and their energy consumption is expected to increase[SJS15]. Compounding this issue is the fact that a significant portion of the energy used by data centers still comes from non-renewable sources[RRR24].

In areas where coal continues to be the primary source of electricity, the environmental impact of data center operations is particularly significant[FWH21]. Data centers powered by coal emit a disproportionately higher amount of carbon emissions compared to those running on cleaner energy sources. As a result, even though data centers may only account for a small percentage of global energy consumption, their contribution to greenhouse gas emissions raises valid concerns.

4.1 Energy used for running servers

Servers are the primary powerhouses within data centers. They process vast amounts of data, ensuring that our emails, cloud applications, online games, and myriad other digital services function seamlessly[BL21]. Their constant activity means they're persistently consuming electricity[Inn20], and this continuous energy draw is a direct contributor to carbon emissions, especially if the electricity source is fossil fuel-based.

Historical energy usage and projected energy usage under doubled computing demand

Doubled demand (relative to 2018) reflects current efficiency trends continuing alongside predicted growth in compute instances.

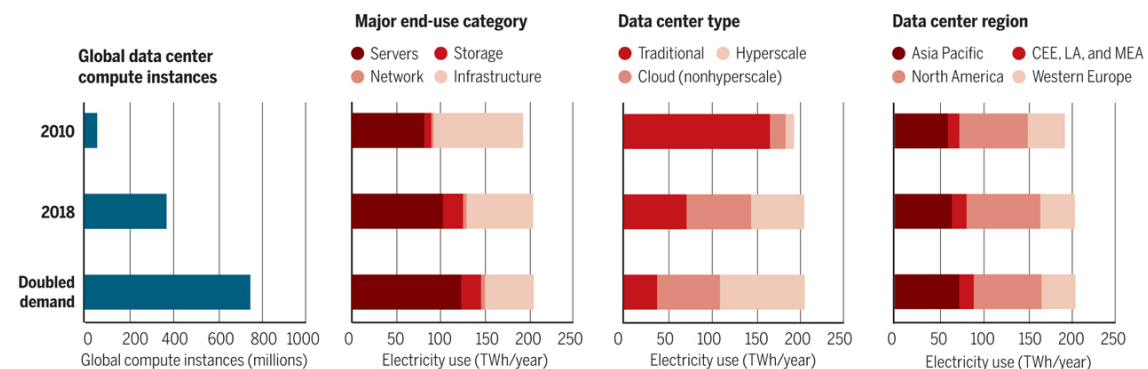


Figure 4.1: Recalibrating global data center energy-use estimates[MSL+20]

4 Energy used from servers

The US data centers handled about 300 million Terabyte of data that consumed around 8.3 billion kWh per year in 2016, hence 27.7 kWh per Terabyte with a carbon footprint of approximately 35 kg CO₂ per Terabyte of data[Cor18].

The energy consumption of switches accounts for approximately 15% of the IT equipment. A 48-port switch consumes approximately 116–190 watts when fully loaded. As can be seen, reducing energy consumption in DC by adjusting the transfer rate of the switch ports is inefficient. Therefore, improving the ECER potential of DCs through flexible scheduling of switch resources is crucial[ZZG+23b].

Two cases to consider:

4.1.1 Idle servers

In data centers, the servers are not always active, as servers can be idle. Then, the power consumption of the counterparts can be divided into two parts. (1) Baseline power (P_{base}), which is the power consumption when the machine is idle, includes the power consumption of the fans, CPU, memory, I/O and other motherboard components in their idle state and is often considered as a fixed value. (2) Active power (P_{active}), which is the power consumption due to the workload, depends on the workload of the machine and the way it utilizes CPU, memory and I/O components. Hence, the power model can be expressed as the sum of baseline power and active power.

4.1.2 Backup generators

Backup generators play a crucial role in ensuring the operational reliability of data centers. These generators, powered by diesel fuel, are responsible for generating electricity during power outages or routine testing. However, it is important to note that when these generators are activated, they produce direct emissions that can have an impact on the environment. While their operational hours may be limited compared to primary equipment, the combustion of diesel fuel leads to a substantial release of greenhouse gases (GHGs).

4.2 Energy used for thermal management

Historically, data centers have heavily relied on traditional HVAC (Heating, Ventilation, and Air Conditioning) systems to maintain desired temperatures. However, these systems are known for their high energy consumption. The main reason for this is their use of mechanical cooling, which involves compressors and refrigerants that consume significant amounts of energy, sometimes even matching the energy consumption of the servers themselves.

In addition to the energy required to power the servers, a substantial amount of energy is dedicated to cooling them and maintaining optimal operating temperatures. This is necessary because the processors within the servers generate a significant amount of heat during operation. Consequently, server rooms tend to become hot due to the heat produced. To address this challenge, numerous measures have been implemented to effectively manage heat distribution and ensure efficient cooling within data centers.

Operating computing systems for extended periods of time at high temperatures greatly reduces reliability, longevity of components and will likely decrease QoS. ASHRAE has in fact now recommended an acceptable operating temperature range of 18° to 27°C (64° to 81°F) to be optimal for system reliability. For environments with low levels of both copper and silver corrosion, the recommended temperature range is between 18° and 21°C (64 to 69.8 °F). However server manufacturer Dell states that the temperature “sweet spot” for their servers is 26.7°C (80°F)[22]. Expensive IT equipment should not be operated in computer rooms or data centers where the ambient room temperature exceeds 85°F (30°C)[42U16].

It is worth noting that the excessive energy consumption associated with traditional HVAC systems has prompted the exploration and adoption of more sustainable and energy-efficient cooling solutions in modern data centers. These innovative approaches aim to reduce both the environmental impact and operational costs of data center cooling. By employing advanced cooling techniques, such as liquid cooling, airflow optimization, and heat recycling, data centers can achieve greater energy efficiency and minimize their carbon footprint.

Approximately 15–27% of the energy consumed by DC can be reduced via research and development of advanced cooling technologies, including natural cooling and liquid cooling to achieve sustainability.

1. **Enhancing Natural Ventilation and Thermal Efficiency:** Designs that prioritize natural ventilation, incorporate thermally conductive materials, and optimize server layout can significantly reduce the reliance on artificial cooling methods. By allowing for the efficient flow of air, these designs promote better airflow management and temperature regulation within data centers. Additionally, utilizing materials with high thermal conductivity helps in dissipating heat more effectively, ensuring that the servers remain at optimum operating temperatures. This combination of natural ventilation and thermally conductive materials creates a more energy-efficient environment within the data center.

2. **Utilizing Energy-Efficient Architectural Features:** Implementing certain architectural nuances can further enhance the energy efficiency of a data center. For instance, roofs painted with reflective coatings help to reduce heat absorption from the sun, minimizing the need for additional cooling. Green roofs, which incorporate vegetation, provide natural insulation and cooling effects, reducing the overall energy demand. Additionally, incorporating thermal buffers such as double-wall constructions can act as a barrier against external temperature fluctuations, maintaining a more stable internal environment. By integrating these features, a data center can inherently become more energy-efficient.

3. **Innovative Layout Strategies:** Hot/cold aisle containment is an effective strategy that involves arranging server racks in a way that consolidates hot exhausts in one direction and cold intakes in another. This segregation ensures that servers do not inadvertently recirculate hot air, thereby making cooling more effective and energy-efficient. By directing the airflow in a controlled manner, hot/cold aisle containment optimizes cooling efficiency and reduces energy wastage.

Another layout strategy being explored is vertical server stacking, as opposed to the traditional horizontal alignment. By stacking servers vertically and strategically placing vents, this configuration takes advantage of the natural physics of heat rising. As hot air naturally moves upward, the vertical arrangement facilitates better heat dissipation, improving overall cooling efficiency.

By implementing these design principles and layout strategies, data centers can significantly reduce their energy consumption, enhance cooling efficiency, and contribute to a more sustainable and environmentally friendly operation.

DCs' ECER strategies are affected by the differences in geographical location, natural resources and economic basis, and the single energy-saving method is difficult to meet the goal of zero-carbon emission.

4.2.1 Free cooling

There are several types of temperature management methods employed in servers and data centers, with air cooling being the most commonly utilized. Air cooling involves the use of fans that generate airflow to cool down the servers and distribute cold air to the hot components. Another air cooling technology worth mentioning is free cooling, which represents a more recent development in this field.

In the case of free cooling, data centers located in extremely cold regions leverage the ambient temperature to maintain a consistent temperature within the server rooms. By harnessing the naturally low temperatures of their surroundings, these data centers are able to reduce their reliance on traditional cooling mechanisms. This approach not only results in lower energy consumption compared to conventional air cooling, but it also minimizes the environmental impact associated with cooling operations.

However, it is important to note that free cooling has certain limitations, primarily due to its dependence on geographical positioning. Data centers that are situated in warmer climates or regions lacking a sufficiently cold environment may not be able to fully utilize this method. In such cases, alternative cooling techniques or a combination of different approaches may be necessary to ensure optimal temperature management and prevent overheating of the servers and related equipment.

4.2.2 Liquid cooling

Liquid cooling technology transfers heat via a flowing liquid (Evans, 2012), and its cooling capacity is approximately 1000–3000 times that of air, which can reduce energy consumption (Ovaska, Dragseth, & Hanssen, 2016).

Liquid cooling is an advanced temperature management technique that surpasses the efficiency of air cooling. While the majority of current IT equipment is designed for air cooling, liquid cooling offers several notable advantages.

The first liquid cooling technology involves attaching water tubes to metallic materials, enabling the flow of water to facilitate cooling. This method has demonstrated superior performance compared to conventional air cooling methods.

Another liquid cooling approach entails submerging servers entirely in a dielectric liquid. By submerging the components in the dielectric fluid, the cooling efficiency is significantly enhanced. Initial testing has shown promising results, showcasing the potential of this method.

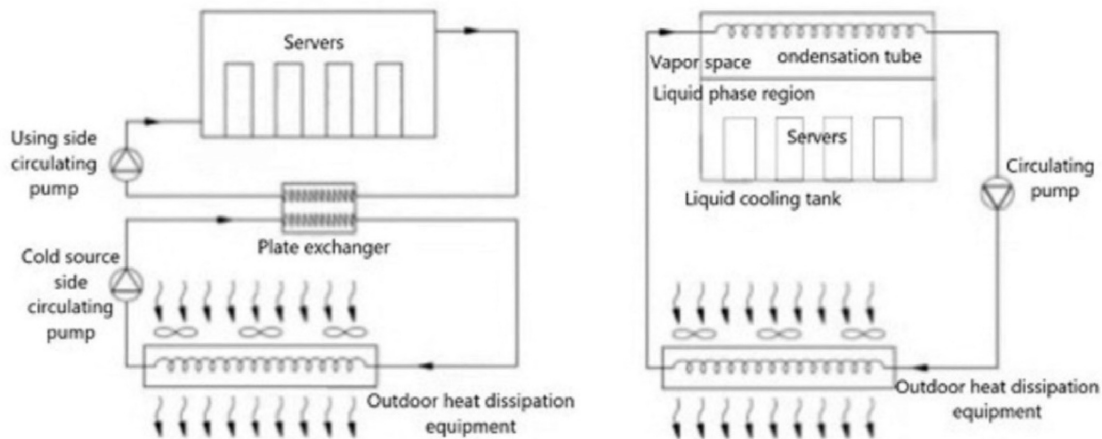


Figure 4.2: Single-phase submerged liquid cooling, Two-phase submerged liquid cooling.; Source: [LSW+23]

It's important to acknowledge that maintaining a liquid cooling system presents certain challenges. In the case of dielectric cooling, the management of the liquid becomes more complex. To implement dielectric cooling effectively, substantial containers capable of accommodating all the components must be created. Such large-scale implementation is currently limited, with testing primarily conducted on smaller servers.

Despite the potential benefits of liquid cooling, the transition from air cooling to liquid cooling requires careful consideration and adaptation of IT equipment. As technological advancements continue, it is expected that liquid cooling will become more prevalent and feasible for a wider range of applications.

Case Studies of Successful Cooling Strategies: •**Google's DeepMind AI Solution:**Google, with its extensive network of data centers, deployed its DeepMind AI to optimise cooling. The AI system analysed data from sensors and made real-time decisions on cooling configurations. The result? A whopping 40% reduction in cooling-related energy consumption(Google DeepMind, 2016).

Facebook's Swedish Data Centre:Located in Luleå, Sweden, this data centre capitalises on its Arctic location by employing free cooling. The cold external air is used to cool the servers, while any excess heat generated is repurposed to warm office spaces. This approach has drastically curtailed the need for mechanical cooling(Harding, 2015).

5 Hardware footprint

Data centers are comprised of a vast amount of hardware which are categorized into two distinct types of equipment: data center infrastructure and computing components. The data center infrastructure consists of a wide range of mechanical and electrical components, such as transformers, generators, air conditioners, racks, and cables. These components work together to support the functioning of the data center. On the other hand, the computing components refer to the servers that handle the processing, storage, and retrieval of data. To ensure optimal performance, the equipment in this category is periodically replaced. Typically, infrastructure components are replaced every 10 to 15 years, taking into account advances in technology, energy efficiency, and the evolving demands of the data center environment.[SLSG24] In contrast, computing components are more frequently changed. This process generates a significant amount of metallic waste, contributing to a substantial environmental footprint. Fortunately, advancements in technology have led to the development of smaller and more efficient hardware solutions.

One notable advancement is the improvement in server design. Modern servers not only offer better performance but also prioritize energy efficiency. They are designed to provide more computational power per watt, reducing overall energy consumption. Additionally, the adoption of solid-state drives (SSDs) instead of traditional hard drives and the utilization of energy-efficient processors have further optimized energy usage within data centers.

Implementing intelligent operations and maintenance management for the cooling system, IT equipment, and lighting in a data center in Langfang resulted in a 1.2% reduction in the PUE value. This implementation also led to an annual electricity saving of 33.36 million kWh[LSW+23].

Furthermore, innovative techniques such as virtualization have played a crucial role in reducing redundant hardware operations. Virtualization allows a single physical server to operate as multiple virtual servers, thereby reducing the need for numerous physical servers and minimizing energy consumption. Additionally, technologies like data deduplication, which identifies and stores redundant data only once, have optimized storage capacity and further reduced energy requirements.

While recycling is necessary to manage the waste generated by data centers, it is important to acknowledge that it also has its own environmental impact. The transportation of waste to recycling facilities contributes to energy consumption and emissions. To address this, data center operators are exploring ways to improve recycling processes, such as implementing local recycling facilities or utilizing more energy-efficient transportation methods.

Furthermore, the concept of circular economy is gaining traction in the data center industry. This approach emphasizes the reuse and repurposing of hardware components whenever possible, reducing the need for constant replacement and minimizing waste generation. By adopting circular economy principles, data centers can significantly reduce their environmental footprint.

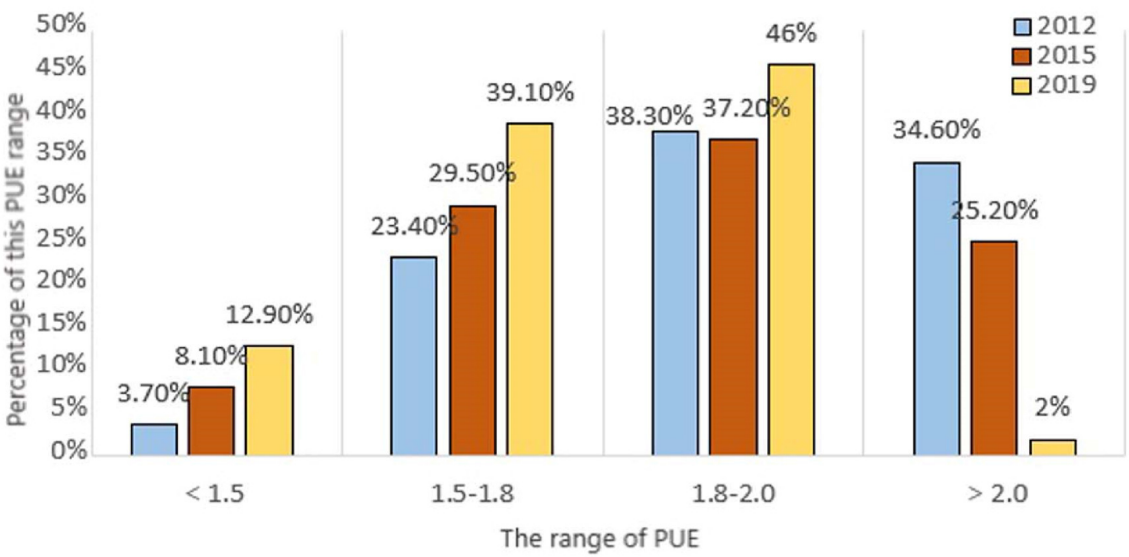


Figure 5.1: The range of PUE; Source: IDC Foresight Industry Research Institute

Technological advancements in server design, the reduction of redundant hardware operations through virtualization, and the adoption of sustainable practices such as recycling and the circular economy are key factors in mitigating the environmental impact of data centers. By continuously striving for energy efficiency, waste reduction, and responsible resource management, the data center industry can contribute to a more sustainable and eco-friendly future.

6 Heading on Level 0 (chapter)

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. $\sin^2(\alpha) + \cos^2(\beta) = 1$. If you read this text, you will get no information $E = mc^2$. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. $\sqrt[n]{a} \cdot \sqrt[n]{b} = \sqrt[n]{ab}$. This text should contain all letters of the alphabet and it should be written in of the original language. $\frac{\sqrt[n]{a}}{\sqrt[n]{b}} = \sqrt[n]{\frac{a}{b}}$. There is no need for special content, but the length of words should match the language. $a \sqrt[n]{b} = \sqrt[n]{a^n b}$.

6.1 Heading on Level 1 (section)

Hello, here is some text without a meaning. $d\Omega = \sin \vartheta d\vartheta d\varphi$. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. $\sin^2(\alpha) + \cos^2(\beta) = 1$. This text should contain all letters of the alphabet and it should be written in of the original language $E = mc^2$. There is no need for special content, but the length of words should match the language. $\sqrt[n]{a} \cdot \sqrt[n]{b} = \sqrt[n]{ab}$.

6.1.1 Heading on Level 2 (subsection)

Hello, here is some text without a meaning. $\frac{\sqrt[n]{a}}{\sqrt[n]{b}} = \sqrt[n]{\frac{a}{b}}$. This text should show what a printed text will look like at this place. $a \sqrt[n]{b} = \sqrt[n]{a^n b}$. If you read this text, you will get no information. $d\Omega = \sin \vartheta d\vartheta d\varphi$. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language. $\sin^2(\alpha) + \cos^2(\beta) = 1$.

Heading on Level 3 (subsubsection)

Hello, here is some text without a meaning $E = mc^2$. This text should show what a printed text will look like at this place. $\sqrt[n]{a} \cdot \sqrt[n]{b} = \sqrt[n]{ab}$. If you read this text, you will get no information. $\frac{\sqrt[n]{a}}{\sqrt[n]{b}} = \sqrt[n]{\frac{a}{b}}$. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information

about the selected font, how the letters are written and an impression of the look. $a\sqrt[n]{b} = \sqrt[n]{a^n b}$. This text should contain all letters of the alphabet and it should be written in of the original language. $d\Omega = \sin\vartheta d\vartheta d\varphi$. There is no need for special content, but the length of words should match the language.

Heading on Level 4 (paragraph) Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. $\sin^2(\alpha) + \cos^2(\beta) = 1$. If you read this text, you will get no information $E = mc^2$. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. $\sqrt[n]{a} \cdot \sqrt[n]{b} = \sqrt[n]{ab}$. This text should contain all letters of the alphabet and it should be written in of the original language. $\frac{\sqrt[n]{a}}{\sqrt[n]{b}} = \sqrt[n]{\frac{a}{b}}$. There is no need for special content, but the length of words should match the language. $a\sqrt[n]{b} = \sqrt[n]{a^n b}$.

6.2 Lists

6.2.1 Example for list (itemize)

- First item in a list
- Second item in a list
- Third item in a list
- Fourth item in a list
- Fifth item in a list

Example for list (4*itemize)

- First item in a list
 - First item in a list
 - * First item in a list
 - First item in a list
 - Second item in a list
 - * Second item in a list
 - Second item in a list
- Second item in a list

6.2.2 Example for list (enumerate)

1. First item in a list
2. Second item in a list
3. Third item in a list
4. Fourth item in a list
5. Fifth item in a list

Example for list (4*enumerate)

1. First item in a list
 - a) First item in a list
 - i. First item in a list
 - A. First item in a list
 - B. Second item in a list
 - ii. Second item in a list
 - b) Second item in a list
2. Second item in a list

6.2.3 Example for list (description)

First item in a list

Second item in a list

Third item in a list

Fourth item in a list

Fifth item in a list

Example for list (4*description)

First item in a list

First item in a list

First item in a list

First item in a list

Second item in a list

Second item in a list

Second item in a list

Second item in a list

7 Related Work

Describe relevant scientific literature related to your work.

8 Conclusion and Outlook

Outlook

Bibliography

- [22] *ASHRAE recommended data center temperature and humidity*. Feb. 2022. URL: <https://avtech.com/articles/23418/ashrae-recommended-data-center-temperature-humidity> (cit. on p. 31).
- [23] Dec. 2023. URL: <https://eia.gov/tools/faqs/faq.php?id=74%5C&t=11> (cit. on p. 24).
- [24a] Apr. 2024. URL: <https://www.britannica.com/technology/software> (cit. on p. 18).
- [24b] *Leading countries by number of data centers as of March 2024*. Apr. 2024. URL: <https://www.statista.com/statistics/1228433/data-centers-worldwide-by-country/> (cit. on pp. 19, 20).
- [42U16] 42U. *Data Center temperature*. Jan. 2016. URL: <https://www.42u.com/cooling/data-center-temperature.htm> (cit. on p. 31).
- [ABA21] K. M. U. Ahmed, M. H. J. Bollen, M. Alvarez. “A Review of Data Centers Energy Consumption and Reliability Modeling”. In: *IEEE Access* 9 (2021), pp. 152536–152563. doi: [10.1109/ACCESS.2021.3125092](https://doi.org/10.1109/ACCESS.2021.3125092) (cit. on p. 24).
- [AKK15] N. Abas, A. Kalair, N. Khan. “Review of fossil fuels and future energy technologies”. In: *Futures* 69 (2015), pp. 31–49 (cit. on p. 22).
- [AM21] N. K. Arora, I. Mishra. “COP26: More challenges than achievements”. In: *Environmental Sustainability* 4.4 (Dec. 2021), pp. 585–588. doi: [10.1007/s42398-021-00212-7](https://doi.org/10.1007/s42398-021-00212-7) (cit. on p. 23).
- [ASF16] The Apache Software Foundation. *Apache ODE™ – The Orchestration Director Engine*. 2016. URL: <http://ode.apache.org> (cit. on p. 50).
- [BL21] S. J. Bigelow, J. Lulka. *7 major server hardware components you should know*. <https://www.techtarget.com/searchdatacenter/feature/Drill-down-to-basics-with-these-server-hardware-terms>. Sept. 2021 (cit. on p. 29).
- [Cor18] C. J. Corbett. “How sustainable is big data?” In: *Production and Operations Management* 27.9 (2018), pp. 1685–1695 (cit. on p. 30).
- [Cos19] M. Cosar. “Carbon footprint in data centre: A case study”. In: *Feb. Fresenius Environ. Bull* 600 (2019) (cit. on p. 18).
- [Dio17] C. Dioxide. “Overview of greenhouse gases”. In: (2017) (cit. on p. 23).
- [Eme15] Emerson Network Power. *Energy logic: reducing data center energy consumption by creating savings that cascade across systems*. White Paper. 2015 (cit. on p. 22).
- [FFN+20] H. K. Firozjaei, M. K. Firozjaei, O. Nematollahi, M. Kiavarz, S. K. Alavipanah. “On the effect of geographical, topographic and climatic conditions on feed-in tariff optimization for solar photovoltaic electricity generation: A case study in Iran”. In: *Renewable energy* 153 (2020), pp. 430–439 (cit. on p. 22).

- [FWH21] R. B. Finkelman, A. Wolfe, M. S. Hendryx. “The future environmental and health impacts of coal”. In: *Energy Geoscience* 2.2 (2021), pp. 99–112 (cit. on p. 29).
- [Hum06] C. Humby. *Data is the new Oil!*, ANA Senior marketer’s summit, Kellogg School. 2006 (cit. on p. 18).
- [IBM24] IBM. *What Is a Data Center?* <https://www.ibm.com/topics/data-centers>. 2024 (cit. on p. 25).
- [IEA23] IEA. *Data Centres and Data Transmission Networks*. <https://www.iea.org/energy-system/buildings/data-centres-and-data-transmission-networks>. 2023 (cit. on p. 29).
- [Inn20] E. Innovation. *How Much Energy Do Data Centers Really Use?* <https://energyinnovation.org/2020/03/17/how-much-energy-do-data-centers-really-use/>. Mar. 2020 (cit. on p. 29).
- [JBY+20] C. Jin, X. Bai, C. Yang, W. Mao, X. Xu. “A review of power consumption models of servers in data centers”. In: *Applied Energy* 265 (2020), p. 114806. issn: 0306-2619. doi: <https://doi.org/10.1016/j.apenergy.2020.114806>. url: <https://www.sciencedirect.com/science/article/pii/S0306261920303184> (cit. on pp. 21, 23).
- [KBB+16] J. von Kistowski, H. Block, J. Beckett, C. Spradling, K.-D. Lange, S. Kounev. “Variations in cpu power consumption”. In: *Proceedings of the 7th ACM/SPEC on International Conference on Performance Engineering*. 2016, pp. 147–158 (cit. on p. 21).
- [KKAH17] N. d. Khan, A. Kalair, N. Abas, A. Haider. “Review of ocean tidal, wave and thermal energy technologies”. In: *Renewable and Sustainable Energy Reviews* 72 (2017), pp. 590–604 (cit. on p. 22).
- [KOW+19] D. Kryzia, P. Olczak, J. Wrona, M. Kopacz, K. Kryzia, D. Galica. “Dampening variations in wind power generation through geographical diversification”. In: *IOP Conference Series: Earth and Environmental Science*. Vol. 214. 1. IOP Publishing. 2019, p. 012038 (cit. on p. 22).
- [LSW+23] G. Li, Z. Sun, Q. Wang, S. Wang, K. Huang, N. Zhao, Y. Di, X. Zhao, Z. Zhu. “China’s green data center development: Policies and carbon reduction technology path”. In: *Environmental Research* (2023), p. 116248 (cit. on pp. 33, 35).
- [MSL+20] E. Masanet, A. Shehabi, N. Lei, S. Smith, J. Koomey. “Recalibrating global data center energy-use estimates”. In: *Science* 367.6481 (2020), pp. 984–986. doi: [10.1126/science.aba3758](https://doi.org/10.1126/science.aba3758). eprint: <https://www.science.org/doi/pdf/10.1126/science.aba3758>. url: <https://www.science.org/doi/abs/10.1126/science.aba3758> (cit. on p. 29).
- [MSS12] S. Mekhilef, R. Saidur, A. Safari. “Comparative study of different fuel cell technologies”. In: *Renewable and Sustainable Energy Reviews* 16.1 (2012), pp. 981–989 (cit. on p. 22).
- [NLA19] D. Nevado-Peña, V.-R. López-Ruiz, J.-L. Alfaro-Navarro. “Improving quality of life perception with ICT use and technological capacity in Europe”. In: *Technological Forecasting and Social Change* 148 (2019), p. 119734 (cit. on p. 18).

- [Pal06] M. Palmer. *Data is the New Oil*. 2006. URL: https://ana.blogs.com/maestros/2006/11/data_is_the_new.html (cit. on p. 19).
- [QHR+19] A. Qazi, F. Hussain, N. A. Rahim, G. Hardaker, D. Alghazzawi, K. Shaban, K. Haruna. “Towards sustainable energy: a systematic review of renewable energy sources, technologies, and public opinions”. In: *IEEE access* 7 (2019), pp. 63837–63851 (cit. on p. 22).
- [RR17] H. Ritchie, P. Rosado. “Fossil fuels”. In: *Our World in Data* (2017). <https://ourworldindata.org/fossil-fuels> (cit. on p. 21).
- [RRR20] H. Ritchie, M. Roser, P. Rosado. “Renewable Energy”. In: *Our World in Data* (2020). <https://ourworldindata.org/renewable-energy> (cit. on p. 22).
- [RRR23a] H. Ritchie, P. Rosado, M. Roser. “CO2 and Greenhouse Gas Emissions”. In: *Our World in Data* (2023). <https://ourworldindata.org/co2-and-greenhouse-gas-emissions> (cit. on p. 24).
- [RRR23b] H. Ritchie, P. Rosado, M. Roser. “Nuclear energy”. In: *Our World in Data* (2023) (cit. on p. 21).
- [RRR24] H. Ritchie, P. Rosado, M. Roser. “Energy mix”. In: *Our World in Data* (2024) (cit. on p. 29).
- [RVA16] H. Reijers, I. Vanderfeesten, W. van der Aalst. “The effectiveness of workflow management systems: A longitudinal study”. In: *International Journal of Information Management* 36.1 (Feb. 2016), pp. 126–141. DOI: [10.1016/j.ijinfomgt.2015.08.003](https://doi.org/10.1016/j.ijinfomgt.2015.08.003) (cit. on p. 50).
- [RZX+16] H. Rong, H. Zhang, S. Xiao, C. Li, C. Hu. “Optimizing energy consumption for data centers”. In: *Renewable and Sustainable Energy Reviews* 58 (2016), pp. 674–691 (cit. on p. 21).
- [SBI+13] R. Sipahutar, S. M. Bernas, M. S. Imanuddin, et al. “Renewable energy and hydropower utilization tendency worldwide”. In: *Renewable and Sustainable Energy Reviews* 17 (2013), pp. 213–215 (cit. on p. 22).
- [SJS15] G. Schomaker, S. Janacek, D. Schlitt. “The energy demand of data centers”. In: *ict Innovations for Sustainability*. Springer. 2015, pp. 113–124 (cit. on p. 29).
- [SLSG24] I. Samaye, P. Leloup, G. Sassatelli, A. Gamatié. “Energy-efficient Hardware Reuse for Sustainable Data Centres”. In: (2024) (cit. on p. 35).
- [STA24] C. STAMFORD. “Gartner Forecasts Worldwide IT Spending to Grow 8% in 2024”. In: <https://www.gartner.com/en/newsroom/press-releases/2024-04-16-gartner-forecast-worldwide-it-spending-to-grow-8-percent-in-2024> (2024) (cit. on p. 25).
- [WCL+05] S. Weerawarana, F. Curbera, F. Leymann, T. Storey, D. F. Ferguson. *Web Services Platform Architecture : SOAP, WSDL, WS-Policy, WS-Addressing, WS-BPEL, WS-Reliable Messaging, and More*. Prentice Hall PTR, 2005. ISBN: 0131488740. DOI: [10.1.1/jpb001](https://doi.org/10.1.1/jpb001) (cit. on p. 49).
- [WK13] L. Wang, S. U. Khan. “Review of performance metrics for green data centers: a taxonomy study”. In: *The journal of supercomputing* 63 (2013), pp. 639–656 (cit. on p. 24).

- [Zho21] D. Zhou. “Role of green data center in human resources development model”. In: *Sustainable Computing: Informatics and Systems* 30 (2021), p. 100492 (cit. on p. 17).
- [ZZG+23a] H. Zhu, D. Zhang, H. H. Goh, S. Wang, T. Ahmad, D. Mao, T. Liu, H. Zhao, T. Wu. “Future data center energy-conservation and emission-reduction technologies in the context of smart and low-carbon city construction”. In: *Sustainable Cities and Society* 89 (2023), p. 104322 (cit. on p. 19).
- [ZZG+23b] H. Zhu, D. Zhang, H. H. Goh, S. Wang, T. Ahmad, D. Mao, T. Liu, H. Zhao, T. Wu. “Future data center energy-conservation and emission-reduction technologies in the context of smart and low-carbon city construction”. In: *Sustainable Cities and Society* 89 (2023), p. 104322. ISSN: 2210-6707. DOI: <https://doi.org/10.1016/j.scs.2022.104322>. URL: <https://www.sciencedirect.com/science/article/pii/S2210670722006266> (cit. on pp. 25, 26, 30).

All links were last followed on March 17, 2018.

A LaTeX Hints

We cannot solve our problems with
the same level of thinking that
created them

(Albert Einstein)

One sentence per line. This rule is important for the usage of version control systems. A new line is generated with a blank line. As you would do in Word: New paragraphs are generated by pressing enter. In LaTeX, this does not lead to a new paragraph as LaTeX joins subsequent lines. In case you want a new paragraph, just press enter twice (!). This leads to an empty line. In word, there is the functionality to press shift and enter. This leads to a hard line break. The text starts at the beginning of a new line. In LaTeX, you can do that by using two backslashes (`\`). This is rarely used.

Please do *not* use two backslashes for new paragraphs. For instance, this sentence belongs to the same paragraph, whereas the last one started a new one. A long motivation for that is provided at <http://loopspace.mathforge.org/HowDidIDoThat/TeX/VCS/#section.3>.

One can write *emphasized text (rendered in italics)* and **bold text**.

A.1 File Encoding and Support of Umlauts

The template offers full UTF-8 support. All recent editors should not have issues with that.

A.2 Citations

References are set by means of `\cite[key]`.

Code:

Example: `\cite{WSPA}` or by author input: `\citet{WSPA}`.

Result:

Example: [WCL+05] or by author input: Weer-
awarana et al. [WCL+05].

The following sentence demonstrates 1. the capitalization of author names at the beginning of the sentence, 2. the correct citation using author names and the reference, 3. that the author names are a hyperlink to the bibliography and that 4. the bibliography contains the name prefix “van der” of “Wil M. P. van der Aalst”.

Code:

```
\Citet{RVvdA2016} present a study on the effectiveness of workflow management systems.
```

Result:

Reijers et al. [RVA16] present a study on the effectiveness of workflow management systems.

The following sentence demonstrates that you can overwrite the text part of the generated label using label in a bibliopgraphie-entry, but the year and the uniqueness are still generated by biber.

Code:

```
The workflow engine Apache ODE \cite{ApacheODE} executes \BPEL processes reliably.
```

Result:

The workflow engine Apache ODE [ASF16] executes BPEL processes reliably.

Code:

```
Words are best enclosed using \texttt{\textbackslash qq\{..\}}, then the correct quotes are used.
```

Result:

Words are best enclosed using \qq{..}, then the correct quotes are used.

When creating the Bibtex file it is recommended to make sure that the DOI is listed.

A.3 Formulas and Equations

Code:

```
Equations  $f(x)=x$  inside the text can be provided.
```

Result:

Equations $f(x) = x$ inside the text can be provided.

A list with all available mathematical symbols is provided at <http://texdoc.net/pkg/symbols-a4>.

Code:

```
As an example, the set of natural numbers is given by  $\mathbb{N}$ .
```

Result:

As an example, the set of natural numbers is given by \mathbb{N} .

Listing A.1 The code is separated by two horizontal lines in the listings environment.

```
<listing name="second sample">
  <content>not interesting</content>
</listing>
```

For the documentation of editing mathematical formulas read the package documentation of `amsmath`¹.

Equation A.1 is numbered and can be referenced in the text:

Code:

Result:

```
\begin{align}
  \label{eq:test}
  x = y
\end{align}
```

(A.1)
 $x = y$

The following equation is not numbered because of using `\align*` as environment.

Code:

Result:

```
\begin{align*}
  x = y
\end{align*}
```

$x = y$

The template offers `\abs` to enable the bars to scale well at the absolute value:

Code:

Result:

```
 $\abs{X}$ .
```

$|X|$.

The documentation available at <http://www.ctan.org/tex-archive/help/Catalogue/entries/voss-mathmode.html> provides more details about mathematical environments.

A.4 Sourcecode

Listing A.1 shows how to embed source code. With `\lstinputlisting` the source code can be loaded directly from files.

¹<http://texdoc.net/pkg/amsmath>

Algorithm A.1 Sample algorithm

```

procedure SAMPLE( $a, v_e$ )
  parentHandled  $\leftarrow (a = \text{process}) \vee \text{visited}(a'), (a', c, a) \in \text{HR}$ 
  // ( $a', c' a$ )  $\in \text{HR}$  denotes that  $a'$  is the parent of  $a$ 
  if parentHandled  $\wedge (\mathcal{L}_{in}(a) = \emptyset \vee \forall l \in \mathcal{L}_{in}(a) : \text{visited}(l))$  then
    visited( $a$ )  $\leftarrow$  true
    writeso( $a, v_e$ )  $\leftarrow$   $\begin{cases} \text{joinLinks}(a, v_e) & |\mathcal{L}_{in}(a)| > 0 \\ \text{writes}_o(p, v_e) & \exists p : (p, c, a) \in \text{HR} \\ (\emptyset, \emptyset, \emptyset, false) & \text{otherwise} \end{cases}$ 
    if  $a \in \mathcal{A}_{basic}$  then
      HANDLEBASICACTIVITY( $a, v_e$ )
    else if  $a \in \mathcal{A}_{flow}$  then
      HANDLEFLOW( $a, v_e$ )
    else if  $a = \text{process}$  then // Directly handle the contained activity
      HANDLEACTIVITY( $a', v_e$ ), ( $a, \perp, a'$ )  $\in \text{HR}$ 
      writes•( $a$ )  $\leftarrow$  writes•( $a'$ )
    end if
    for all  $l \in \mathcal{L}_{out}(a)$  do
      HANDLELINK( $l, v_e$ )
    end for
  end if
end procedure

```

Code:

Source code is also available in the text \
 lstinline|<listing />|.

Result:

Source code is also available in the text <listing
 />.

A.5 Pseudocode

Algorithm A.1 shows a sample algorithm.

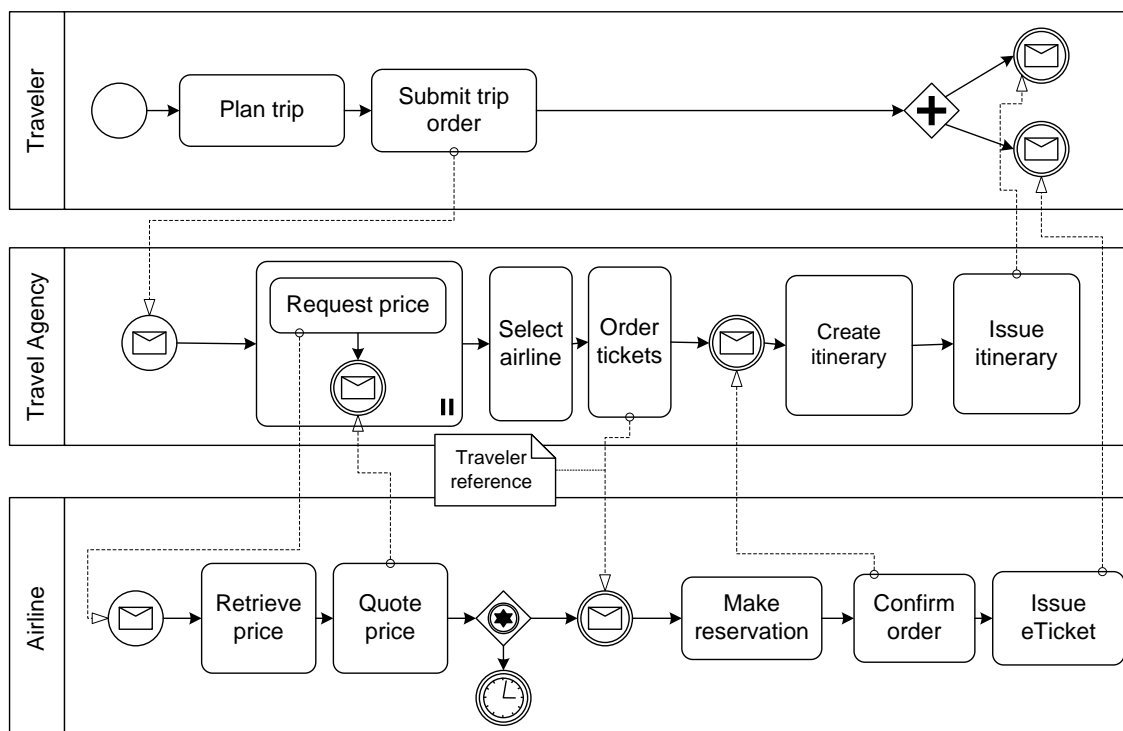


Figure A.1: Example Choreography

And if you want to write an algorithm that goes over several pages, you can only do this with the following **dirty** hack:

Algorithmus A.2 Description

code goes here
test2

A.6 Figures

The Figure A.1 and A.2 are important to understand this document. In the appendix Figure A.4 on page 55 shows again the complete choreography.

Figure A.3 shows the usage of the package subcaption. It is indeed possible to reference to sub figures: Figure A.3a.

It is possible to convert SVGs to PDF directly during compilation. This is described in the source code of latex-tips.tex, but commented out.

A.7 More Illustrations

Figures A.4 and A.5 show two choreographies, which should further explain the facts. The second figure is rotated 90 degrees to demonstrate the pdf\lscap package.

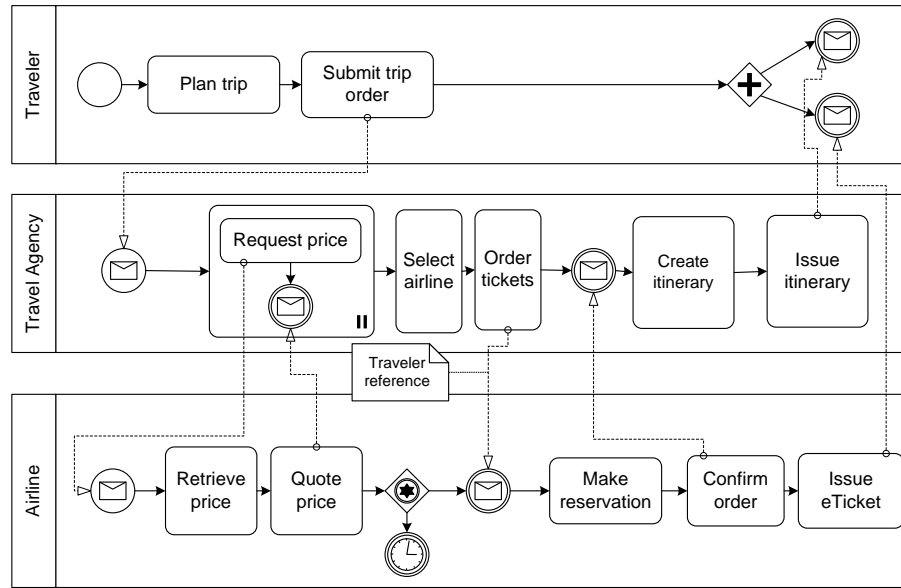


Figure A.2: The example choreography. Now slightly smaller to demonstrate `\textwidth`. And also the use of alternative captions for the list of images. However, the latter is only conditionally recommended, because who reads so much text under a picture? Or is it just a matter of style?

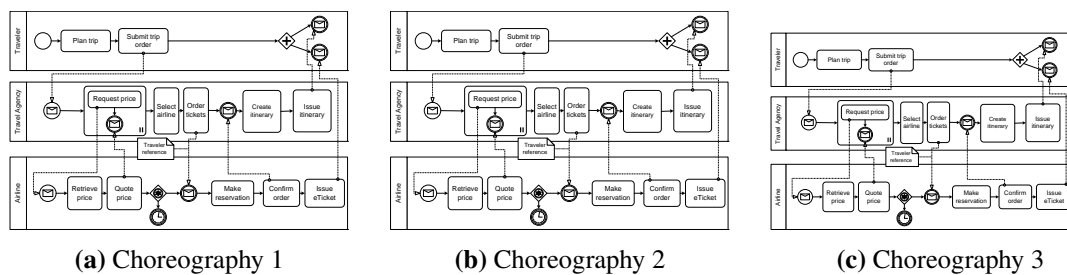


Figure A.3: Example to place 3 illustrations next to each other. Further, it is possible to reference each separately.

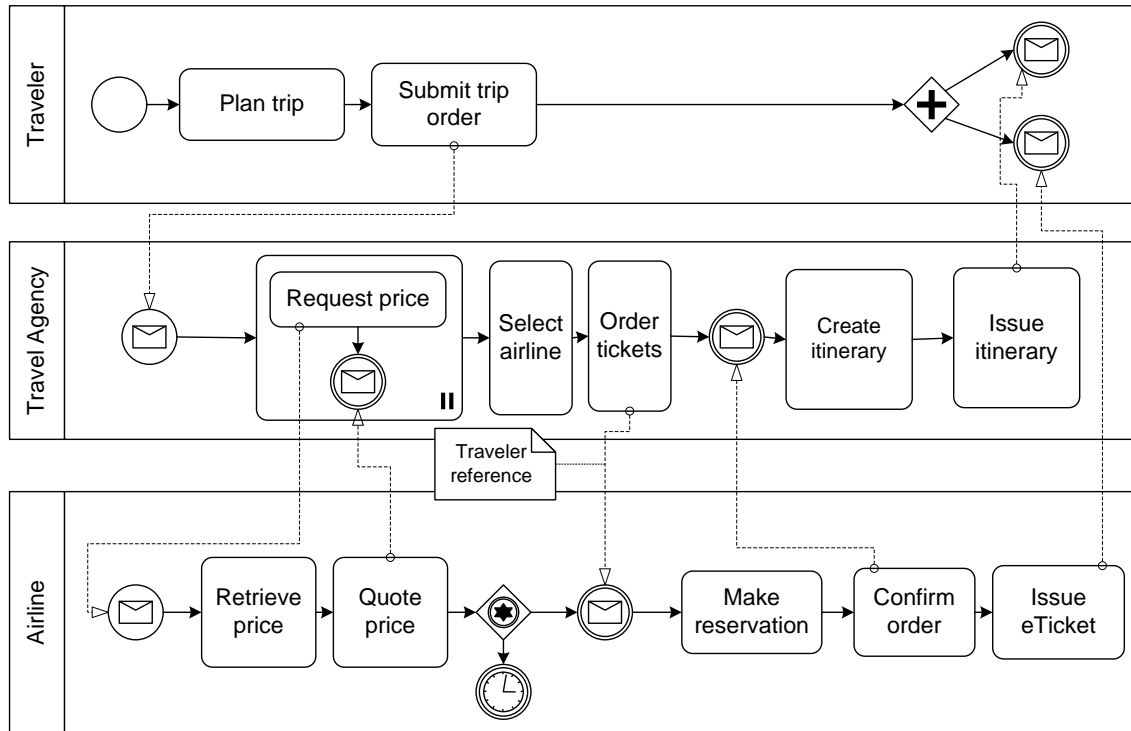


Figure A.4: Example Choreography I

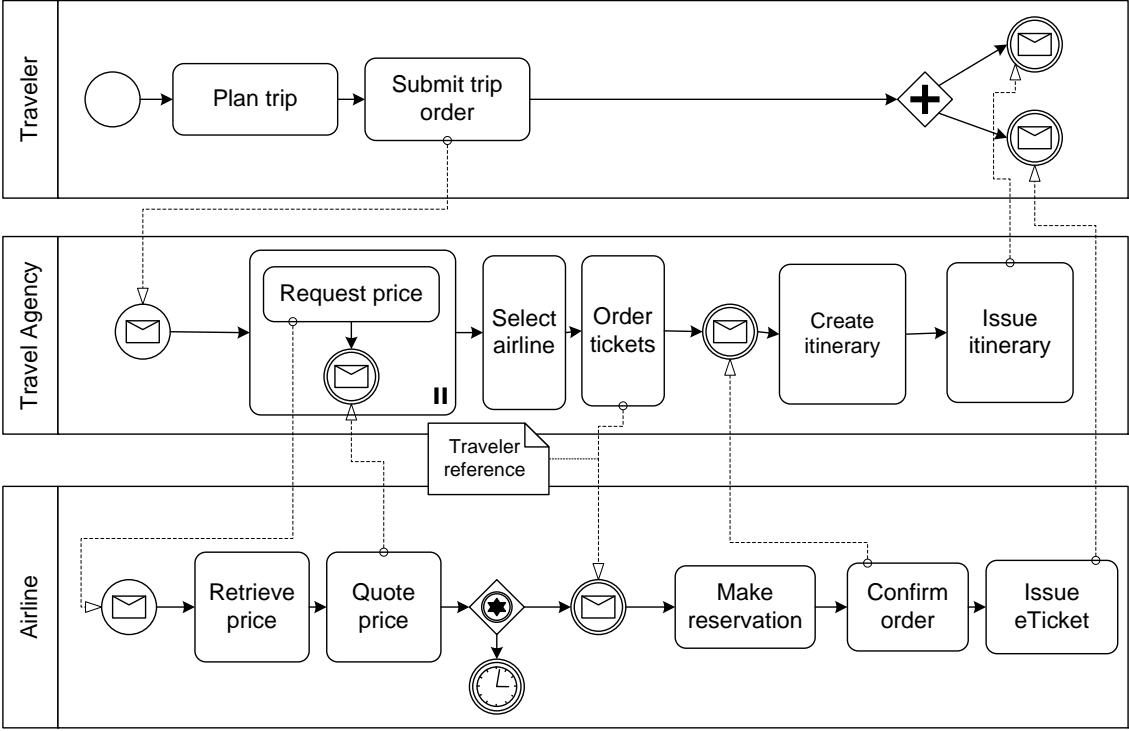


Figure A.5: Example Choreography II

A.8 Plots with pgfplots

The package `pgfplots` provides plotting of functions directly in \LaTeX like with `matlab` or `gnuplot`. Some visual examples are available [here](http://texdoc.net/pkg/visualltikz)².

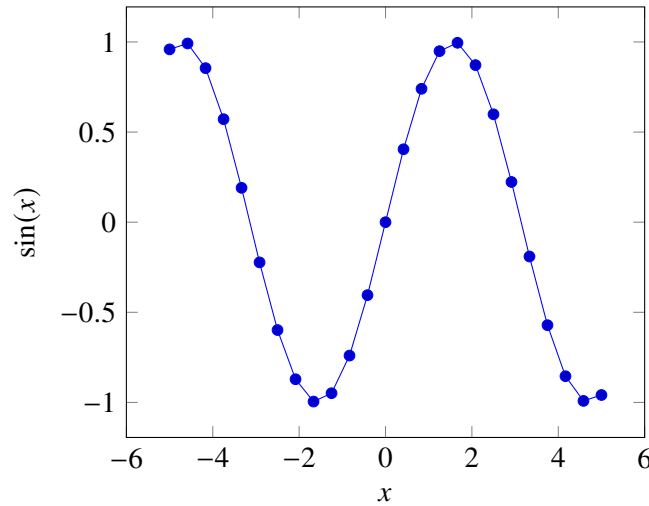


Figure A.6: Plot of $\sin(x)$ directly inside the figure environment with `pgfplots`.

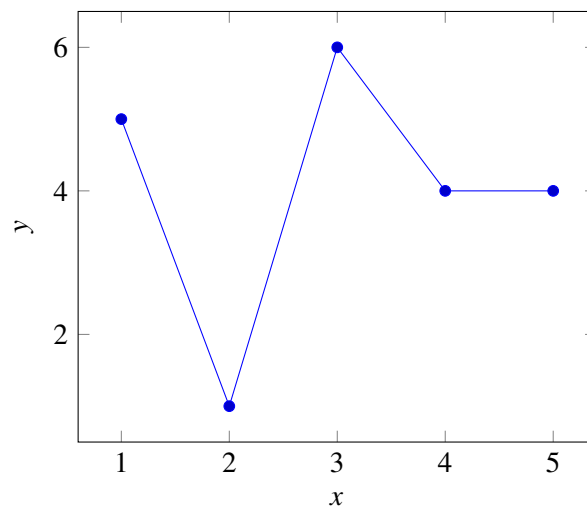


Figure A.7: Coordinates x and y read from csv file and plotted `pgfplots`.

A.9 Figures with tikz

The `tikz` is a package for creating graphics programmatically. With this package grids or other regular structures can be easily generated.

²<http://texdoc.net/pkg/visualltikz>




Figure A.8: A regular grid generated easily with two for loops.

A.10 UML diagrams using tikz-uml

Figure A.9 presents a class diagram typeset using tikz-uml.

A.11 UML diagrams using PlantUML


In case Lua_{La}T_EX is used and PlantUML is installed, UML diagrams can be defined using PlantUML.

A.12 Linguistic Forests

Code:

```
\begin{forest}
  [VP
    [DP]
    [V
      [V]
      [DP]
    ]
  ]
\end{forest}
```

Result:



A.13 Tables

Table A.1 shows results and Table A.2 shows how numerical data can be represented in a table.

A.13.1 Tables with pgfplots

With the pgfplotstable package tables can be directly generated from a csv file.

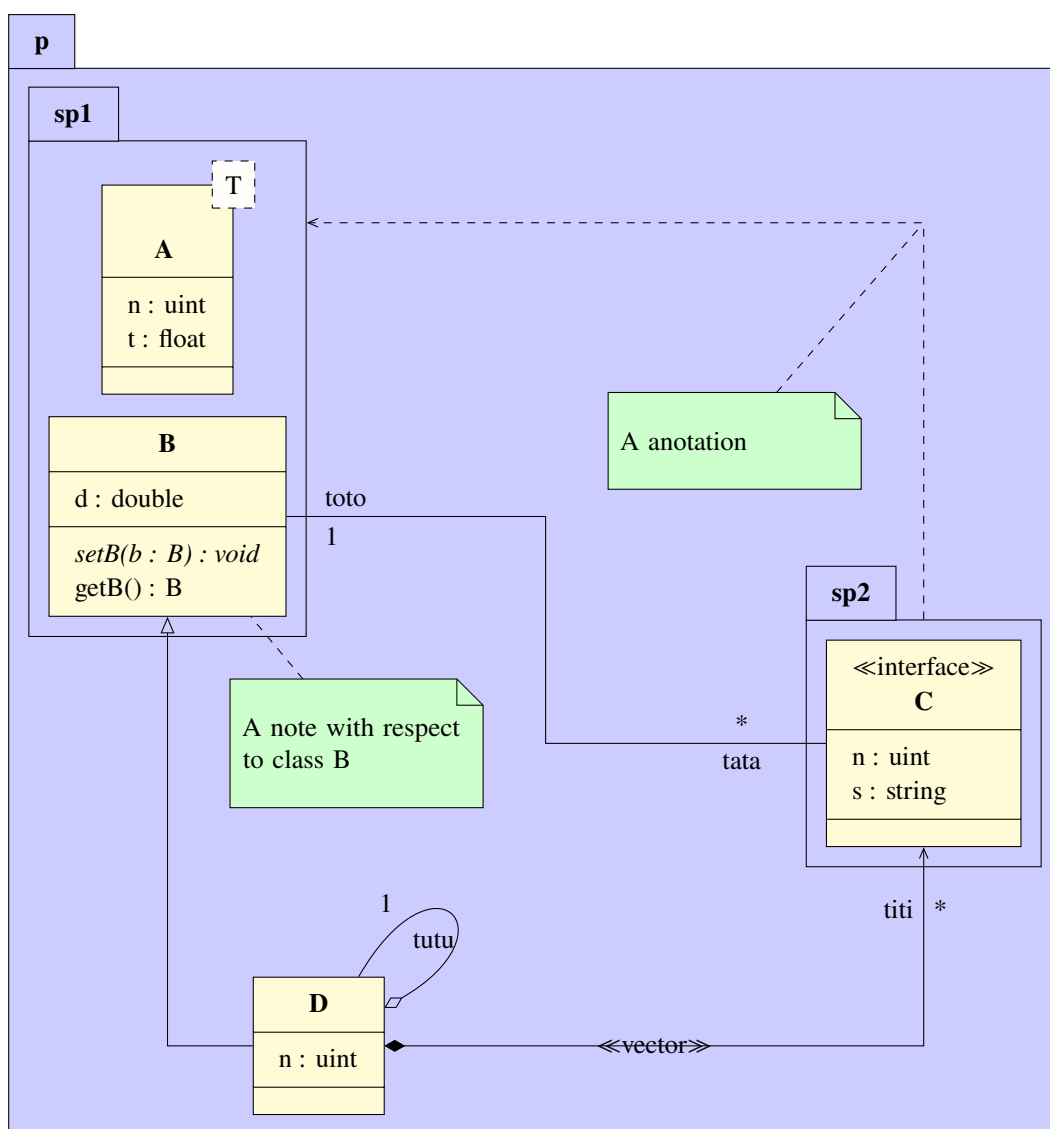


Figure A.9: Class diagram generated with tikz-uml. Example adapted from Nicolas Kielbasiewicz.

summed	Title	
Table	as	in
tabsatz.pdf	recommended	gesetzt
Example	a nice example for using “multirow”	

Table A.1: Exampe Table – see <http://www.ctan.org/tex-archive/info/german/tabsatz/>

Bedingungen	Parameter 1		Parameter 2		Parameter 3		Parameter 4	
	M	SD	M	SD	M	SD	M	SD
W	1.1	5.55	6.66	.01				
X	22.22	0.0	77.5	.1				
Y	333.3	.1	11.11	.05				
Z	4444.44	77.77	14.06	.3				

Table A.2: Example table for 4 constraints (W-Z), each having 4 parameters with (M und SD).
Note: use always the same number of decimal places.

	b	c	d
1	4	5	1
2	3	1	5
3	5	6	1
4	1	4	9
5	3	4	7

Table A.3: Table directly generated from the values of a csf file.

A.14 Tables spanning multiple pages

Table A.4: A sample long table.

First column	Second column	Third column
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
Continued on next page		

Table A.4 – continued from previous page

[illegible]

Table A.4 – continued from previous page

First column	Second column	Third column
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D
A	BC	D

A.15 Abbreviations

At the first pass, the Fehlerrate (FR) was 5. At the second pass was FR 3. The plural form can be seen here: error rates (ERs). To demonstrate what the list of abbreviations looks like for longer description texts, Relational Database Management Systems (RDBMS) must be mentioned here.

With `\gls{...}` you can enter abbreviations, the first time you call it, the long form is used. When reusing `\gls{...}` the short form is automatically displayed. The abbreviation is also automatically inserted in the abbreviation list. With `\glspl{...}` the plural form is used. If you want the short form to appear directly at the first use, you can use `\glsunset{...}` to mark an abbreviation as already used. The opposite is achieved with `\glsreset{...}`.

Abbreviations are defined in `\content\ausarbeitung.tex` by means of `\newacronym{...}{...}{...}`.

More information at: <http://tug.ctan.org/macros/latex/contrib/glossaries/glossariesbegin.pdf>

A.16 References

For distant sections “`\varioref`” is recommended: “See Appendix A.3 on page 50”. The command `\vref` works similarly to `\cref` the difference being that a reference to the page is additionally added. `\vref`: “Appendix A.1 on page 49”, `\cref`: “Appendix A.1”, `\ref`: “A.1”.

If “`\varioref`” causes difficulties, then “`\cref`” can be used instead. This also creates the word “section” automatically: Appendix A.3. This is also possible for illustrations etc. In English please use `\Cref{...}` (with large “C” at the beginning).

A.17 Definitions

Definition A.17.1 (Title)

Definition Text

Definition A.17.1 shows ...

A.18 Footnotes

Footnotes are provided by the command `\footnote{...}`³. Citing footnotes is possible by providing a label `\footnote{\label{...}}...` and cite the footnote with `\cref{...}` in the text³.

A.19 Various Things

Code:

```
\begin{compactenum}[I.]
  \item You can also keep the numbering
compact thanks to paralist
  \item and switch to a different numbering
\end{compactenum}
```

Result:

- I. You can also keep the numbering compact thanks to paralist
- II. and switch to a different numbering

³Example footnote.

The words “workflow” and “dwarflike” can be copied from the PDF and pasted to a text file.

Code:

In case `\LuaLaTeX{}` is used as the compiler, there is no ligature at `\qq{f\l}` in the word `\qq{dwarflike}` (in contrast to `\qq{fl}` at `\qq{workflow}`).
In other words: `\qq{dwarflike}` and `\qq{dwarf\l/like}` look the same in the PDF.
In case they do not, there is an issue with `Lua\LaTeX{}` and the `selnolig` package.

Result:

In case `LuaLATEX` is used as the compiler, there is no ligature at “fl” in the word “dwarflike” (in contrast to “fl” at “workflow”). In other words: “dwarflike” and “dwarflike” look the same in the PDF. In case they do not, there is an issue with `LuaLATEX` and the `selnolig` package.

A.20 Closing remarks

Please feel free to provide enhancements for this template and create a new ticket on GitHub (<https://github.com/latextemplates/uni-stuttgart-computer-science-template/issues>).

Declaration

I hereby declare that the work presented in this thesis is entirely my own and that I did not use any other sources and references than the listed ones. I have marked all direct or indirect statements from other sources contained therein as quotations. Neither this work nor significant parts of it were part of another examination procedure. I have not published this work in whole or in part before. The electronic copy is consistent with all submitted copies.

place, date, signature