CAI JIANXIONG
ZENG XIANGCHEN
GAO LING

3-D PANORAMA

INTRODUCTION


What's our goal?




Source: MATLAB "Feature Based Panoramic Image Stitching" with our data

2D PANORAMA

3D PANORAMA

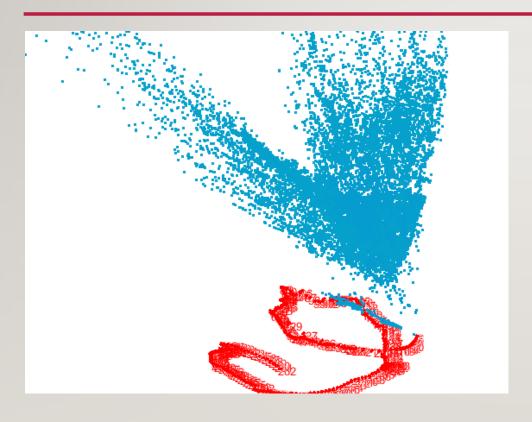

MATLAB "Structure From Motion From Multiple Views" with our data

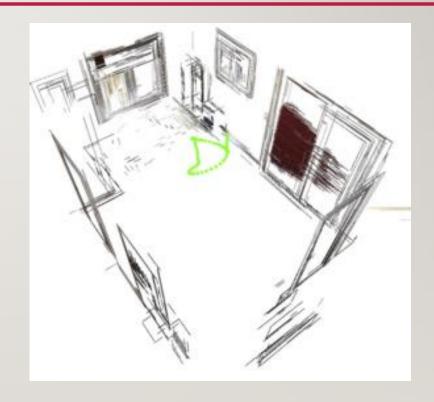


Source: Panoramic Structure from Motion via Geometric Relationship Detection


RELATED WORK

Points based SFM

- MATLAB Structure From Motion From Multiple Views (similar to HW3)
- VisualSFM : A Visual Structure from Motion System
- I-point RANSAC

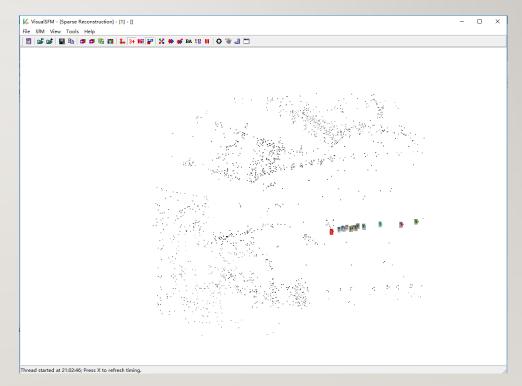

Source: VisualSFM with our data

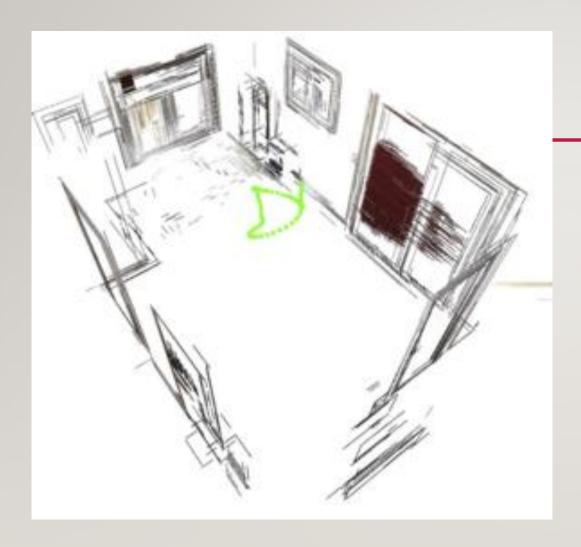


LINE BASED SFM

Paper "Panoramic Structure from Motion via Geometric Relationship Detection"

Pipeline:

- I. Line segment detection
- 2. Manhattan frame & line extraction
- 3. Line tracking
- 4. Geometric relationship detection
- 5. Linear SfM
- 6. Bundle adjustment

Ikehata, S., Boyadzhiev, I., Shan, Q., & Furukawa, Y. (2016). Panoramic Structure from Motion via Geometric Relationship Detection. Retrieved from http://arxiv.org/abs/1612.01256

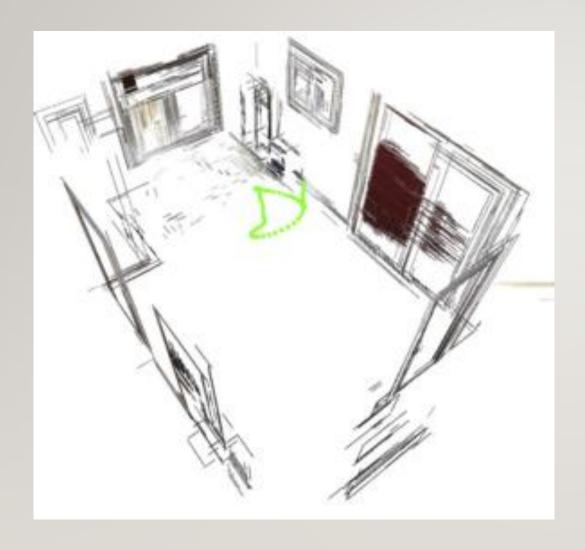


LINE BASED SFM

Pipeline:

- I. Line segment detection
- 2. Manhattan frame & line extraction
- 3. Line tracking
- 4. Geometric relationship detection
- 5. Linear SfM
- 6. Bundle adjustment

MANHATTAN FRAME


- The edges of man-made objects can all follow some particular directions.
- For many indoor environments, the objects in it can be classified into "Manhattan world" objects.

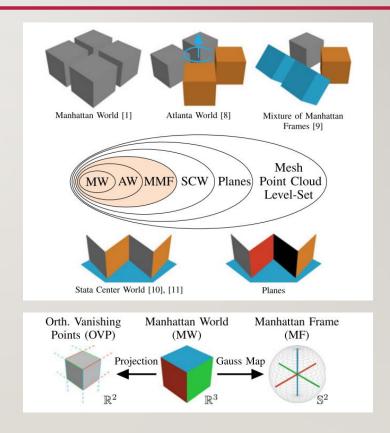

MANHATTAN WORLD LINE EXTRACTION

CAST VOTES ON GAUSSIAN SPHERE

- Generate a Gaussian Sphere.
- Lines → interpretation plane.
- Cast votes to the Gaussian Sphere.
- Extract Manhattan frame (total 3 directions).
- Extract Manhattan lines.

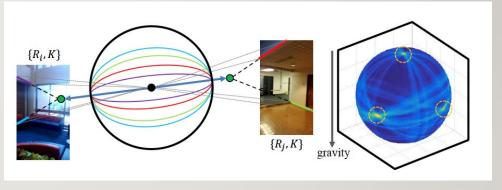









MANHATTAN WORLD LINE EXTRACTION



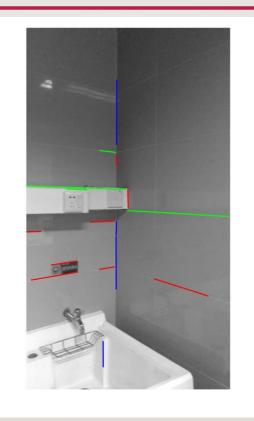

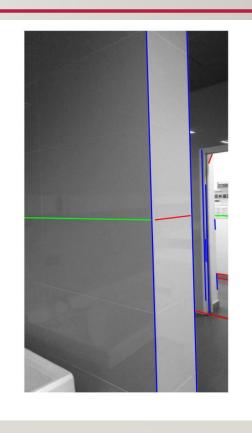


Problem with that approach

Manhattan world assumption – Strong Assumption

Deep-network for surface normal estimation


TECHNICAL APPROACH

Technical Approach

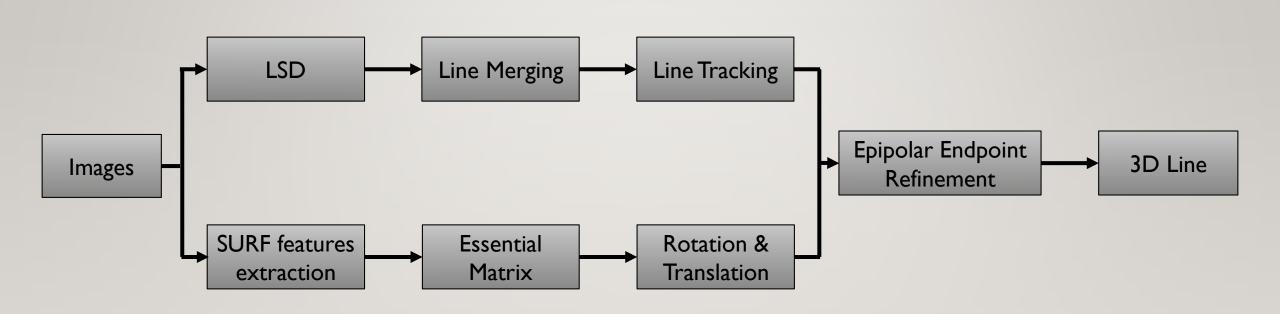

Data Pre-processing

following "Panoramic Structure from Motion via Geometric Relationship Detection"

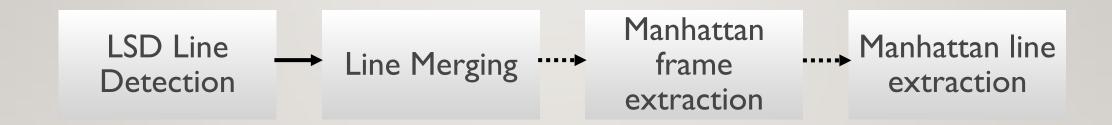

LSD LINE DETECTION

An OpenSource Library for line extraction

Grompone von Gioi, R., Jakubowicz, J., Morel, J.-M., & Randall, G. (2012). LSD: a Line Segment Detector. *Image Processing On Line*, 2, 35–55. https://doi.org/10.5201/ipol.2012.gj mr-lsd






LINE MERGING

We Implemented the paper:

Tavares, J. (1995). A new approach for merging edge line segments. *RecPad95*, (January). Retrieved from http://repositorio-aberto.up.pt/handle/10216/420

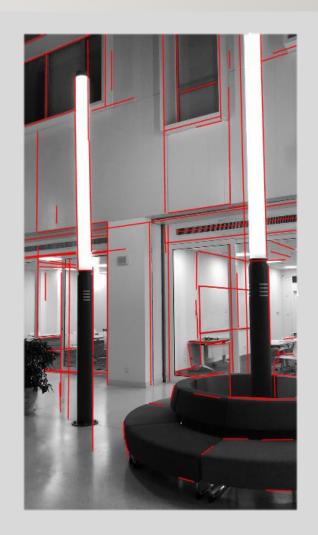








Frame I Frame 7 Frame 14


LINETRACKING

We implemented "Panoramic Structure from Motion via Geometric Relationship Detection" Line Tracking Section


Technical Approach

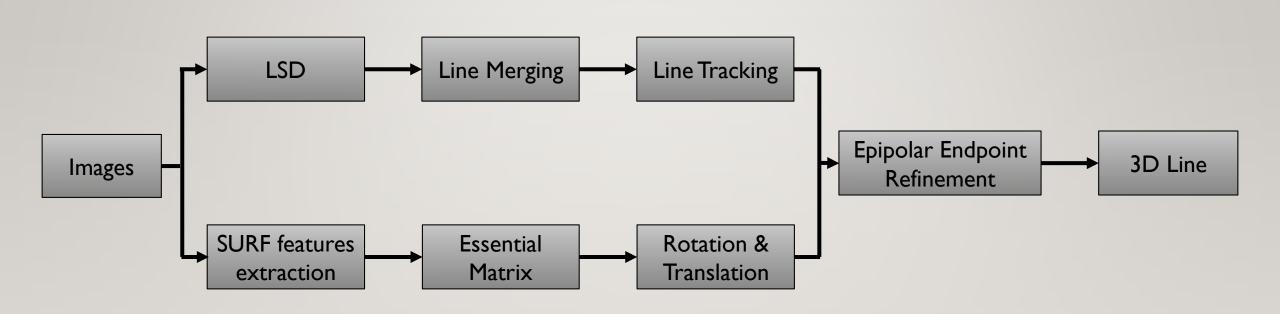

Trajectory

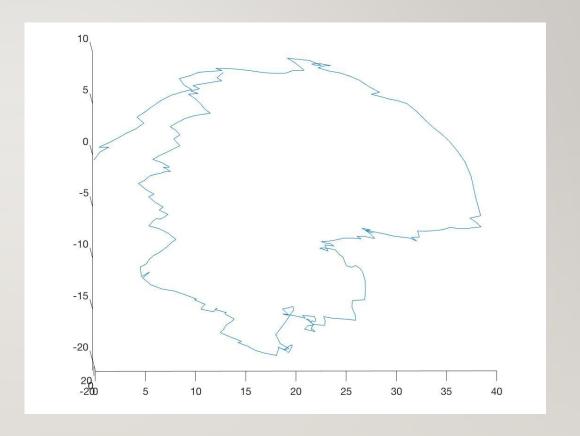


Technical Approach

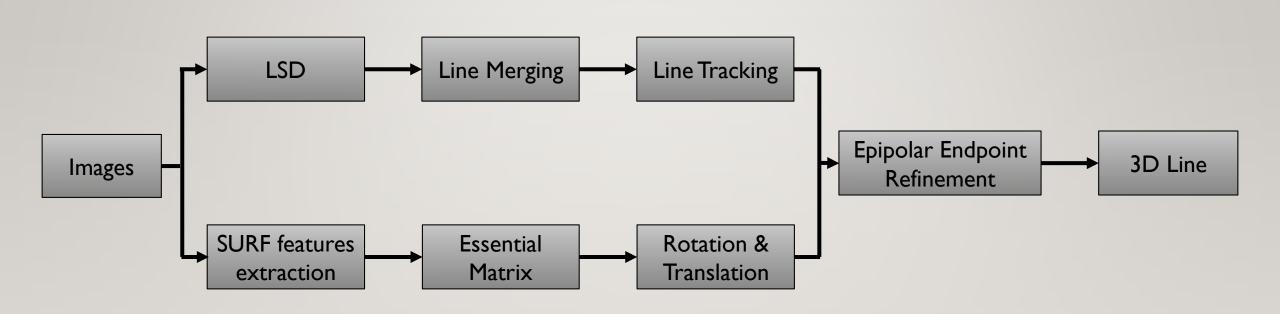


SOME REFINEMENTS ON REPROJECTION

EPIPOLAR LINES
3D POINT RANSAC





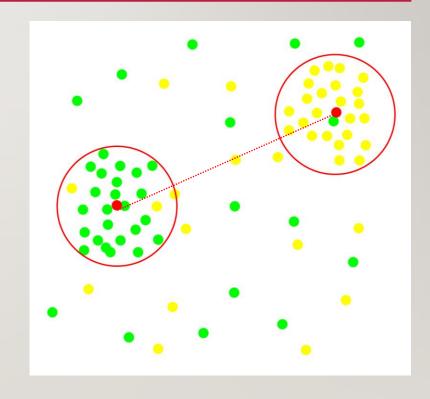

RESULT

View the result in MATLAB (Line_Cloud.fig in presentation folder)

WHY IT LOOKS SO TERRIBLE?

- The Inaccuracy of the lines.
- Occlusion
- Reflection on the ground
- The Complexity of Environments.





REFERENCE

- Ikehata, S., Boyadzhiev, I., Shan, Q., & Furukawa, Y. (2016). Panoramic Structure from Motion via Geometric Relationship Detection. Retrieved from http://arxiv.org/abs/1612.01256
- Tavares, J. (1995). A new approach for merging edge line segments.
 RecPad95, (January). Retrieved from http://repositorio-aberto.up.pt/handle/10216/420
- Grompone von Gioi, R., Jakubowicz, J., Morel, J.-M., & Randall, G. (2012). LSD: a Line Segment Detector. *Image Processing On Line*, 2, 35–55. https://doi.org/10.5201/ipol.2012.gjmr-lsd
- Coughlan, J. M. (1999). Manhattan World: Compass Direction from a Single Image by Bayesian Inference 2 Previous Work and Three- Dimensional Geometry. *Camera*, 0(c).
- VisualSFM: A Visual Structure from Motion System. Available at http://ccwu.me/vsfm/



ZENG XIANGCHEN zengxc@shanghaitech.edu.cn

GAO LING gaoling@shanghaitech.edu.cn