

Lectures 5 - CS163

1. Topic 4 - Stacks & Queues
2. Circular Linked Lists
3. Doubly Linked Lists, Additional Linked Lists
4. Next time: Recursion vs iteration

Announcements:

 PRACTICE !!!

* Program 2 is on Stacks and Queues

Stack Operations


1. Push: `int push(const data & to_add);`

why not: `int push();` ? *what's being added?*

why not: `void push(data);` ? *avoid pass by value when working with classes or structs*

2. Pop: `int pop();` // and
`int pop(data & data_at_top);`

why not: `data pop();` ? *return by VALUE*

why not: `int pop(data);` ? *Variable = pop();*
Copy 


3. Peek (retrieve at top): `int peek(data & at_top);`

why not: `int peek();` ?

why not: `data peek();` ?

Stacks - Data Structures

Arrays

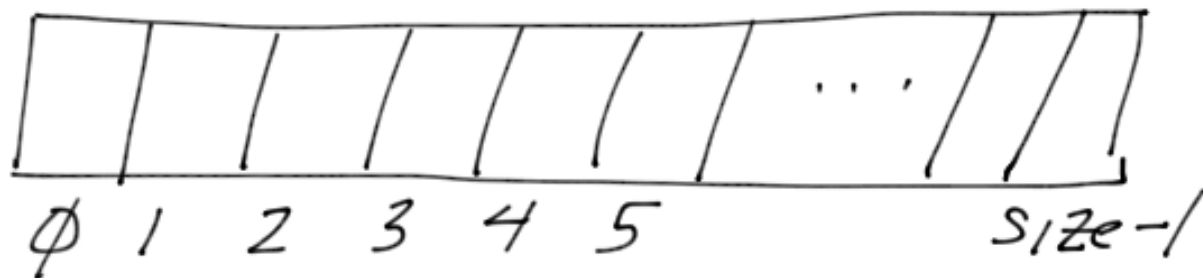

- where do you push? At the top index
- where is the top? It can start at 0 and go forward OR at size-1 and go backwards

- does the data shift or move? **NEVER**

- Option 1: use top as an index

array[top] = _____;
++top;

array[top].set(to_add);

if the data is a class object

- Option 2: use top as a pointer

top = array; //setup




*top = _____

top → set(to_add);

Details

data * array;
array = new data[Size];

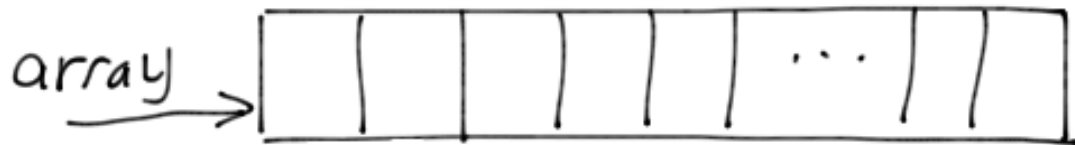

Subscripts:

array[top] = _____
++top;

top = array;

*top = _____
++top;

~~or~~ *top++ _____

Array of class Objects

array[top].Set(to_add);
++top;


(*top++) . Set(to_add);

or

top → Set(to_add);
++top;


Stacks - Linear Linked Lists

choice 1:




where do we add?

choice 2:

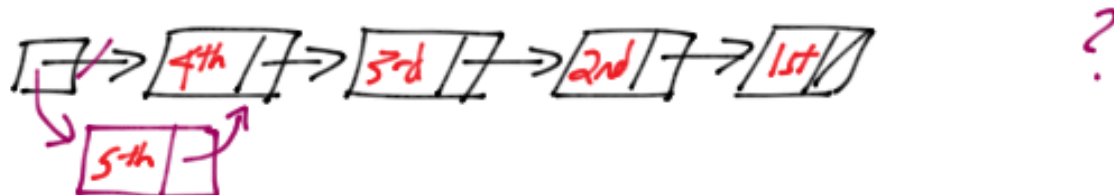


Before you make the decision - think about
where we remove (pop).....

choice 1:

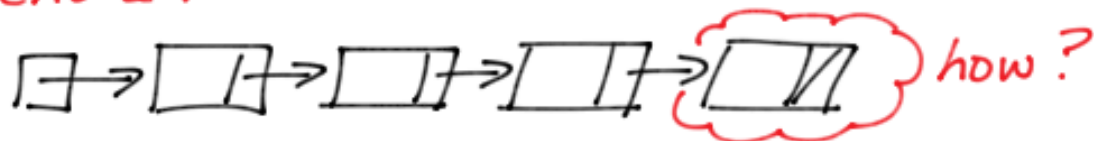


choice 2: temp ①

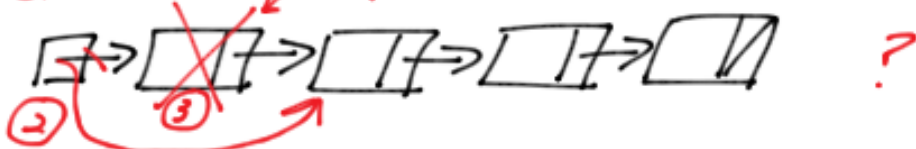

There is only **ONE** correct interpretation!

Queues - Using Arrays (Linear array)

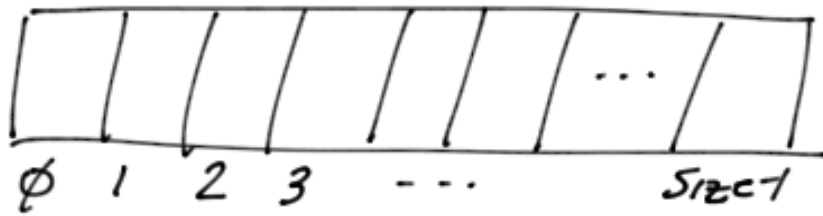

`enqueue(10);`

`enqueue(20);`

`enqueue(30);`



`enqueue(40);`

`dequeue();`

`dequeue();`

`dequeue();`


`enqueue(50);`

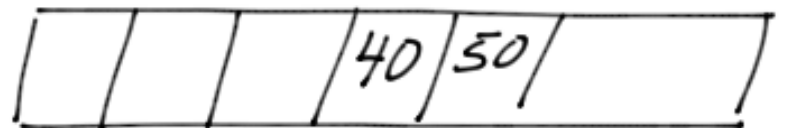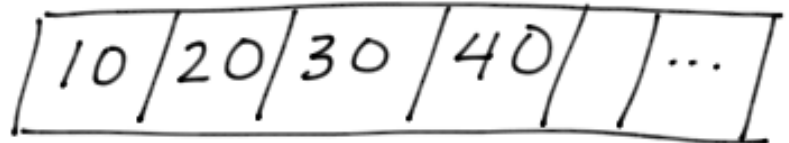

$\xrightarrow{\text{rightward Drift}}$

Therefore, due to rightward drift Linear arrays are not viable data structures.

"Circular" Arrays

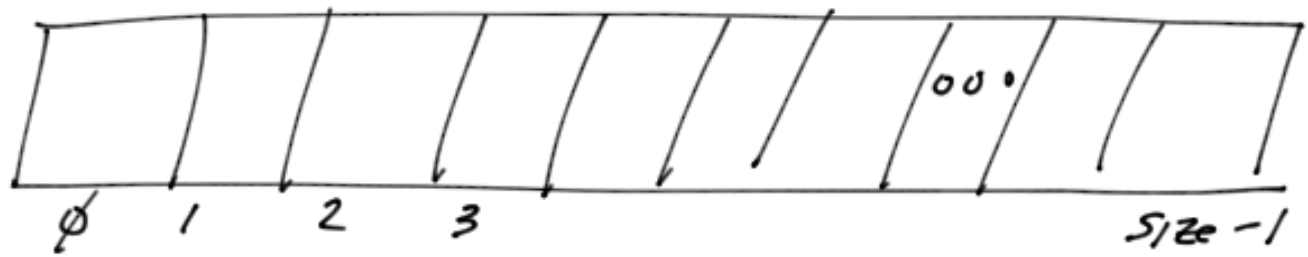

With a "Circular Array", we alter how indices are incremented:

Linear Array

array[index] =
++index;

circular Array

array[index] =
index = (index + 1) % size;

Go To The next index


make sure
resulting index
is within the
range 0 to size-1

Efficiency: index = (index + 1) % size;

++index use compound assign.

Result: ++index % size; % =

Compare :

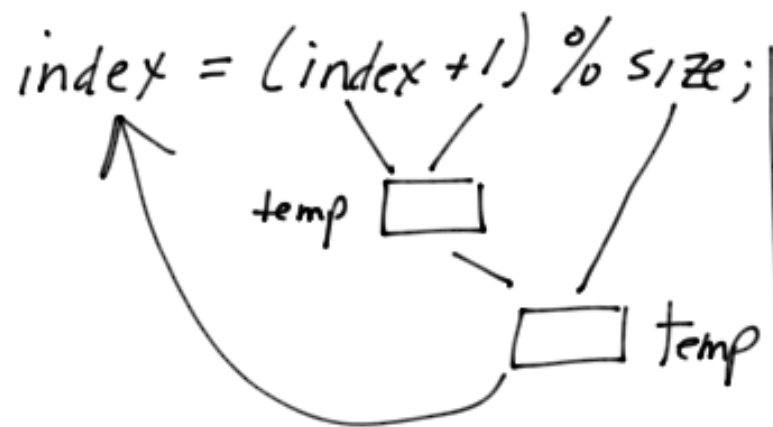

3 ops + 5 fetches


$\underbrace{++index \% = size;}$
First

2 ops + 2 fetches

Queues - Linear Linked List

where to enqueue?


choice 1:

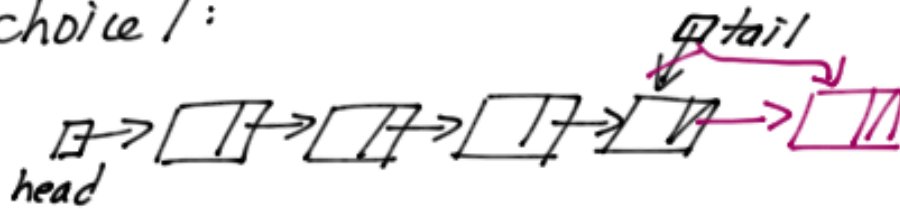

```
tail->next = new node;  
tail = tail->next;  
tail->next = NULL;
```

vs.

choice 2:

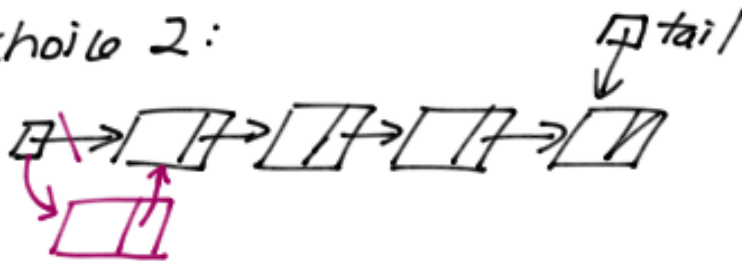

```
temp = new node;  
temp->next = head;  
head = temp;
```

First think about dequeue?

choice 1:



```
temp = head;  
head = head->next;  
delete temp; ← releases  
that first node
```

choice 2:



```
if (head == tail)  
{  
  delete tail; head = tail = NULL;  
}  
else {  
  current = head;  
  while (current->next != tail)  
    current = current->next;  
  delete tail; tail = current;  
  tail->next = NULL;
```


Choice #1 is the ONLY
VIABLE SOLUTION!

Queues - Circular Linked Lists


case 1: Empty List



case 2: 1 item

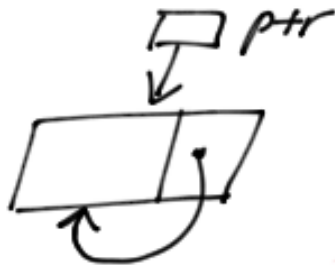

case 3: More items

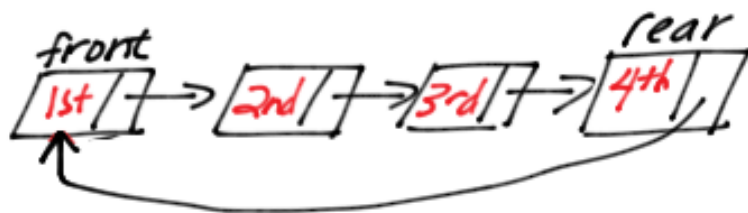

Enqueue (case 3)

$temp = ptr \rightarrow next;$
 $ptr \rightarrow next = new\ node;$
 $ptr = ptr \rightarrow next;$
 $ptr \rightarrow next = temp;$



∴ ptr is a "rear" ptr

Dequeue (case 3)

$temp = ptr \rightarrow next \rightarrow next;$
 $delete\ ptr \rightarrow next;$
 $ptr \rightarrow next = temp;$

