

k-Means

k-Means

Variables:

Item One  
Item Two  
Item Three  
Item Four

Standardize Variables: ☐ Yes ☐ No

Parameter1: from to

Parameter2: to

Parameter3: start end

Parameter4: start: 0 end: 0

Plot Options

Output Column Name

Model Parameters


Default text of the textfields would be smaller than the label and a lighter color (gray). Clicking on them removes the default text.

Are spinners necessary?


Model Parameters are assumed to be left empty.

Results

Cluster A

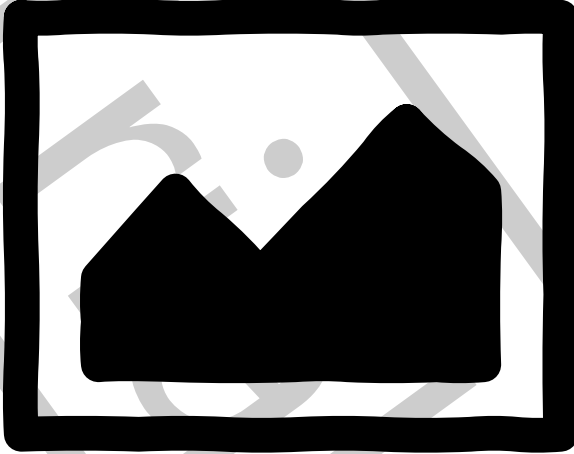

Cluster B

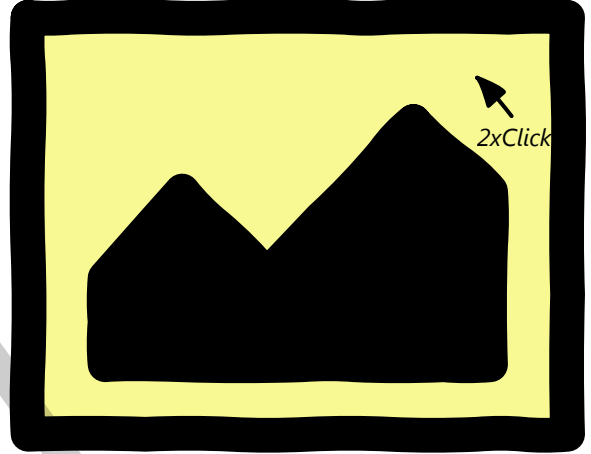


Move Up

Use

Results

Cluster B1

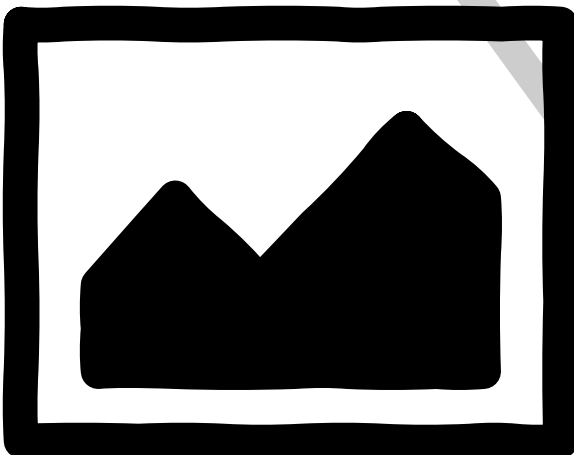

Cluster B2



Move Up


Use

Click


Hovering shows items of cluster.  
Clicking selects cluster and shows items. Clicking a selected cluster disables the preview of the clusters again.  
Double clicking inspects cluster as in "Tree".

Results

Cluster A

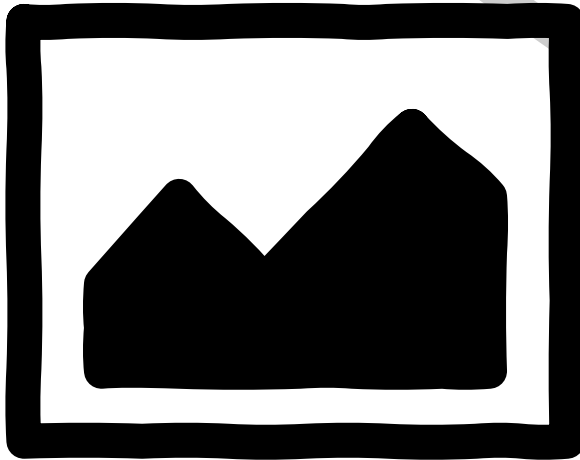


Cluster B

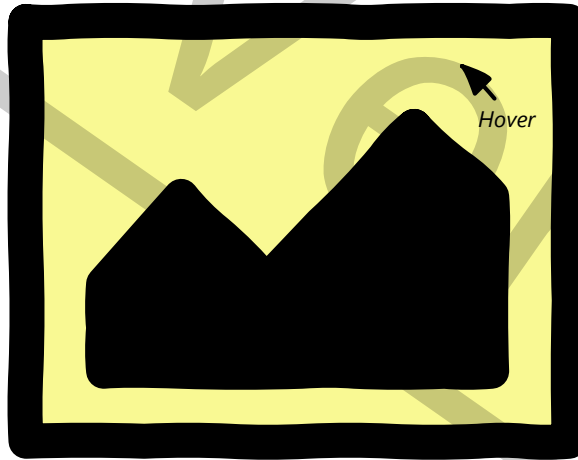


Move Up


Use

Cluster B1

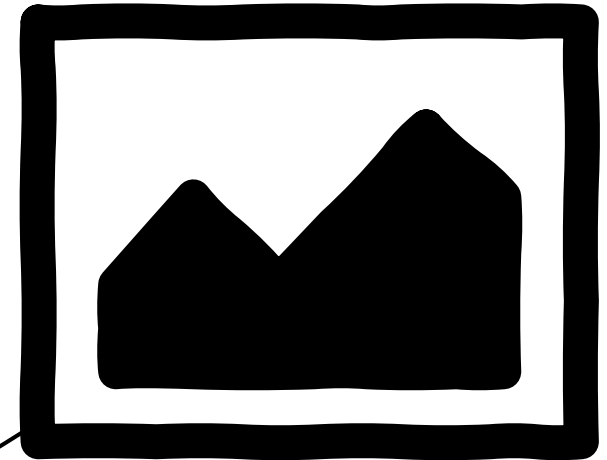


Cluster B2

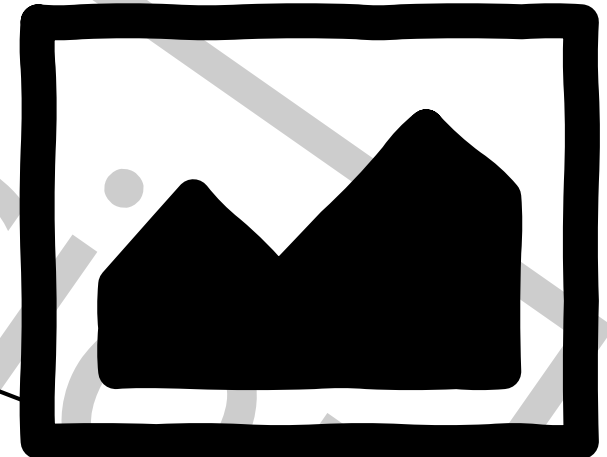

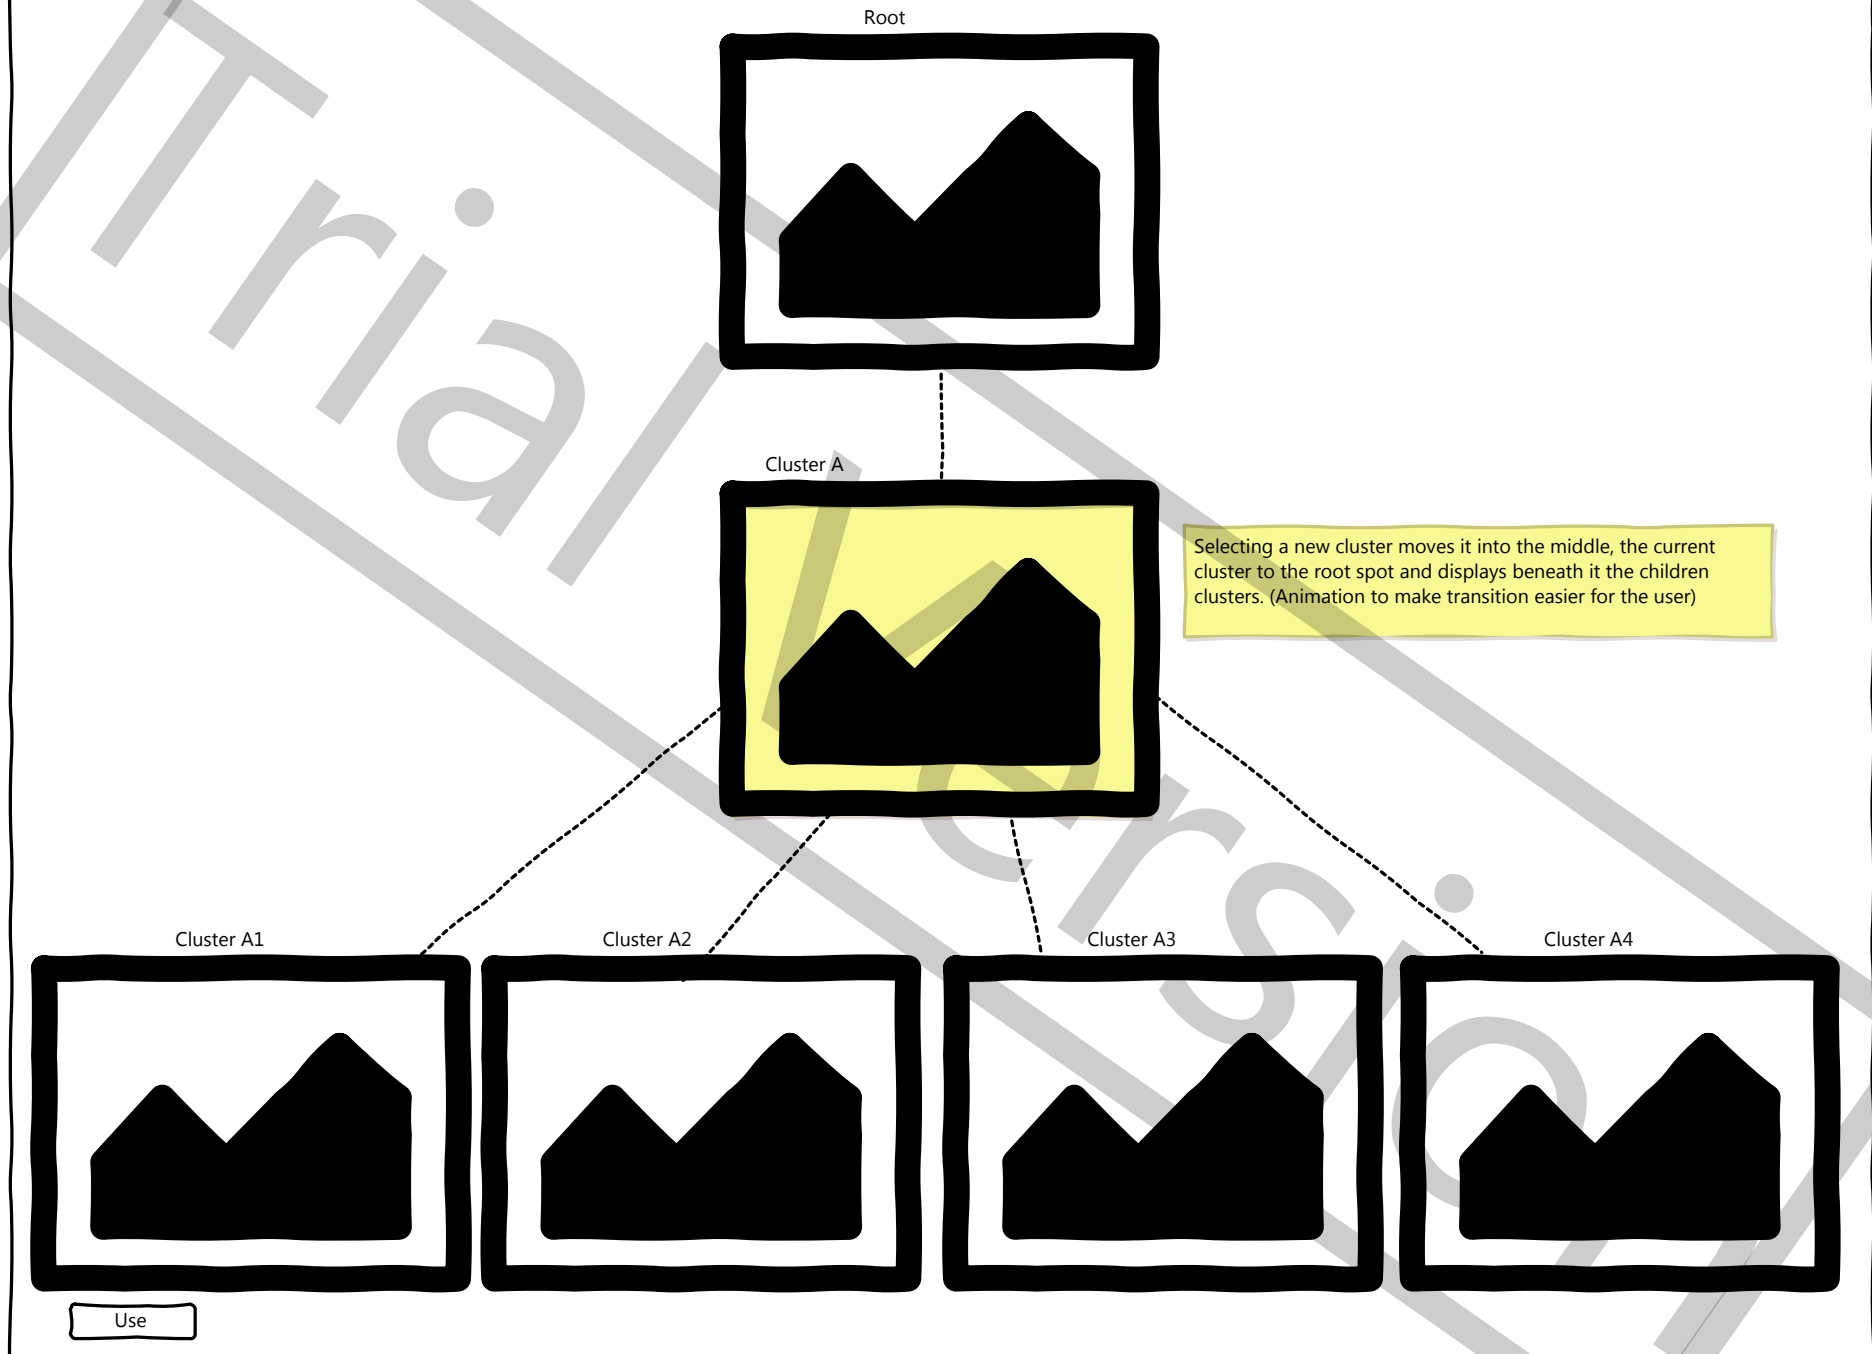

Size of the cluster's preview is determined by the relative distance (measured in links) from the currently selected cluster.  
If a certain threshold in distance is reached, the cluster disappears from the view.  
The selected node will be shifted towards the center, but does not always have to be exactly in the center in case other nodes need some space.

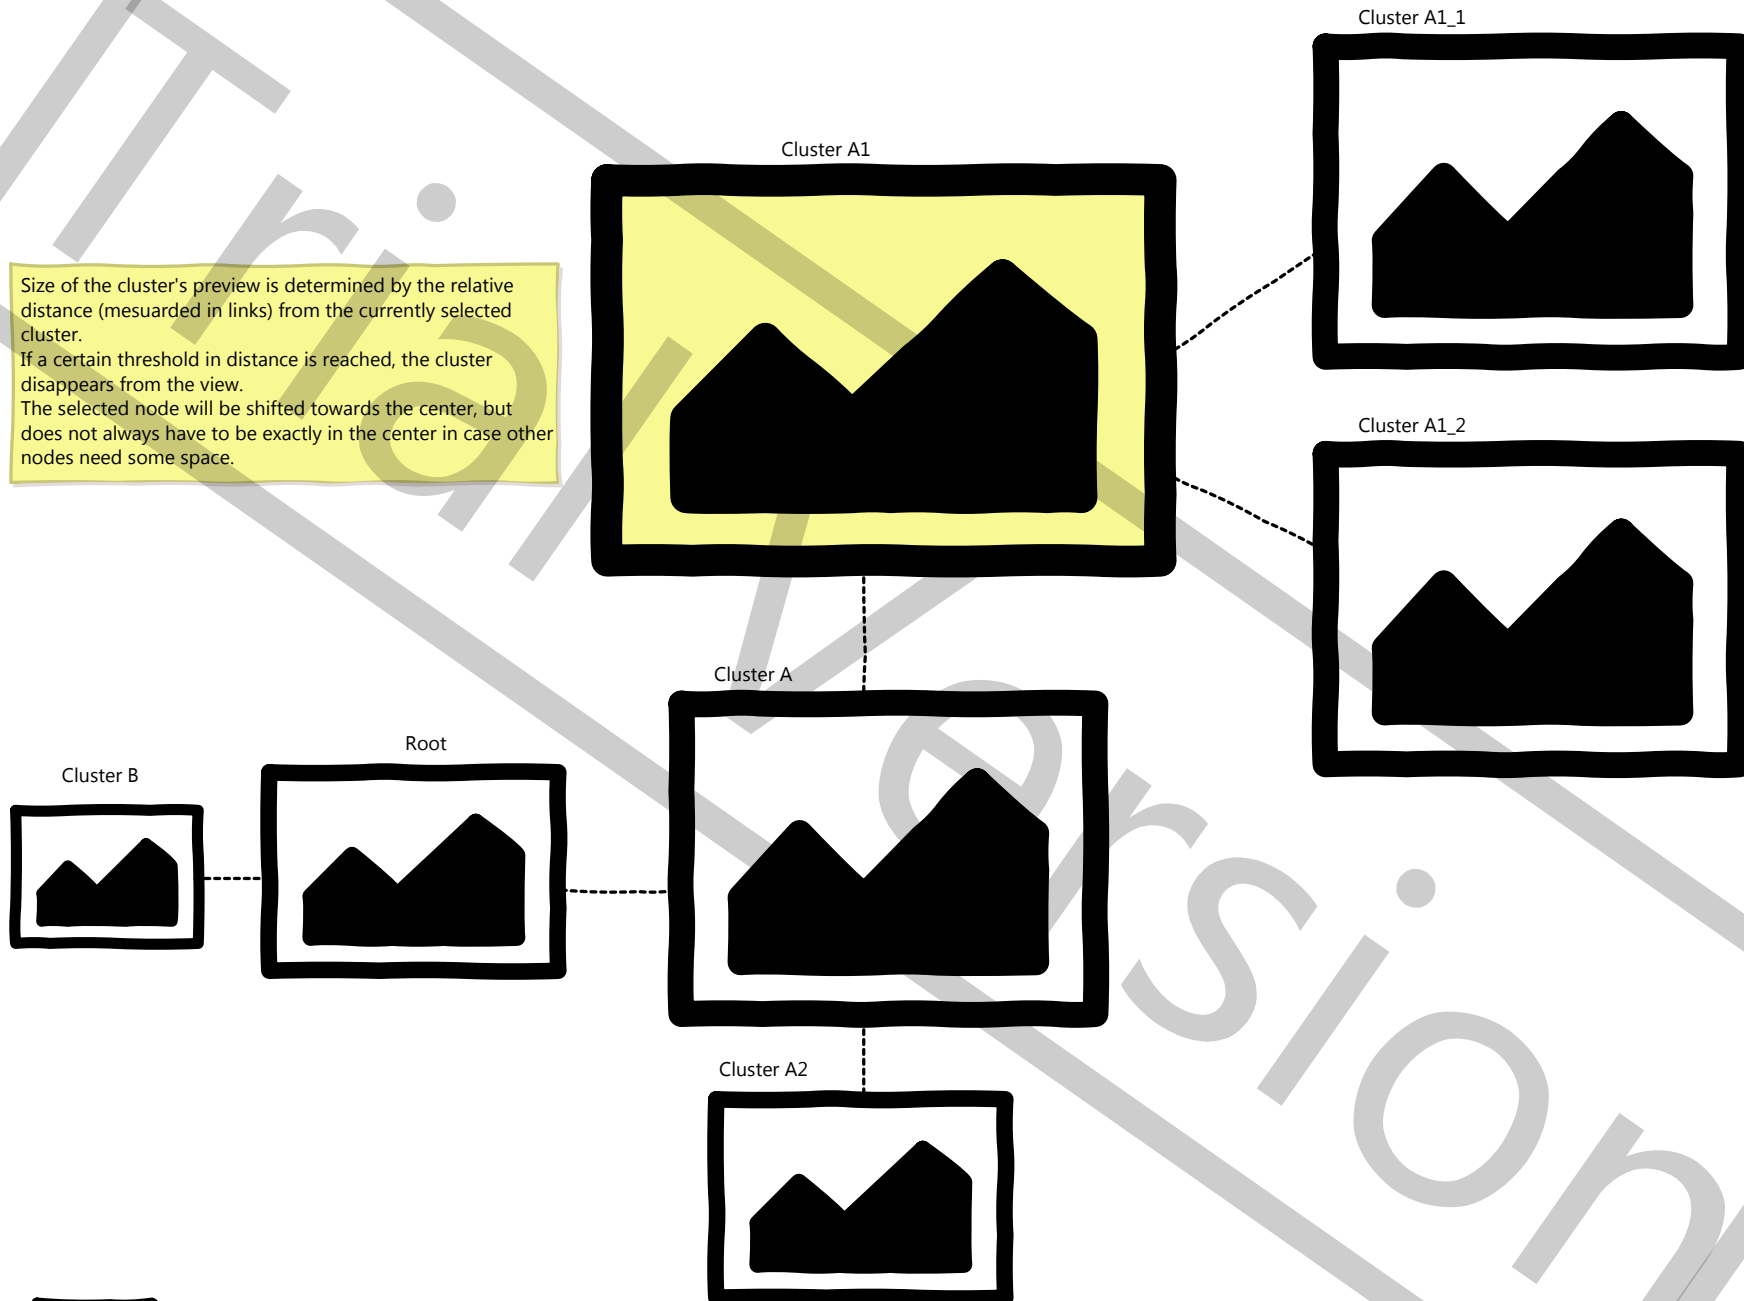

Results

