

HOW MUCH DOES BODY POSE HELP PEDESTRIAN TRAJECTORY FORECASTING? A SEED-REPLICATED STUDY AND AUXILIARY-LOSS AUDIT ON WAYMO

Anonymous authors

Paper under double-blind review

ABSTRACT

Body pose is a plausible but rarely used signal for pedestrian trajectory forecasting in autonomous driving. We extend the Motion Transformer (MTR) with a GRU encoder over past SMPL body poses (6D rotation representation) and measure what pose conditioning is actually worth on a pedestrian subset of the Waymo Open Motion Dataset, using LiDAR-derived pose pseudo-ground-truth. Our study has two parts. First, an *auxiliary-loss audit*: an earlier draft of this work credited geodesic $SO(3)$ supervision with a 7.6% minADE improvement. We show analytically and empirically that in our data condition the geodesic loss receives *identically zero gradient*—future pose targets are absent—so the credited configurations differed only by random seed; the auxiliary signal that actually trains the encoder is a winner-takes-all L1 pose-regression loss. Second, a *seed-replicated measurement* of the surviving questions, with paired bootstrap confidence intervals over 6,688 validation pedestrians. Whether pose helps depends on the encoder *and* the context. With the original GRU encoder, pose-conditioned training is heavy-tailed—8 replicates of one configuration span minADE 0.629–0.897—and on average *worse* than the no-pose baseline. Cross-attention over pose frames with sinusoidal positional encoding is more stable and, at three seeds, appeared to give a -3.5% improvement; two further seeds reveal that this too was a small-sample artifact (0.6549 ± 0.0278 at five seeds, one a heavy-tailed failure; not significant under a seed-resampling bootstrap). In the noisy no-map condition, *no* pose configuration reliably beats the baseline. A single configuration does: with HD map context (itself worth -26%), the cross-attention+PE encoder gives -1.6% , stable across five seeds ($p < 10^{-4}$)—the only seed-significant pose benefit we find. It does not generalize: with the GRU encoder the map benefit is zero, and after full-Waymo backbone pretraining (a further -22%) the apparent pose benefit does not survive five seeds. Even the surviving -1.6% is mostly explained by a root-orientation channel the pose pipeline derives from past heading. Our results give a calibrated estimate of pose’s value—small, context-dependent, and partly a heading artifact—and a cautionary, reproducible example (twice over, including our own correction) of how few-seed ablations attribute gains to noise or inert components.

1 INTRODUCTION

Predicting where pedestrians will walk is a safety-critical problem in autonomous driving. State-of-the-art trajectory forecasting models such as MTR (Shi et al., 2022; 2024) achieve impressive accuracy by operating on observed agent positions, velocities, and HD map geometry—but they discard a potentially rich source of information: the *body pose* of the pedestrian.

Human gait encodes intent. A pedestrian who is turning to face a crosswalk will likely cross it; one whose torso is oriented away from traffic is unlikely to step into the road. A runner’s body orientation predicts turns before the feet complete them. Modern perception systems increasingly provide body pose estimates (Zhu et al., 2023). While recent work uses skeleton keypoints for pose-conditioned prediction in robot navigation and pedestrian benchmarks (Salzmann et al., 2023; Saadatnejad et al.,

2024; Gao et al., 2025), state-of-the-art autonomous driving forecasters operating on Waymo (Ettinger et al., 2021) discard body pose entirely. This paper asks: *does conditioning on past SMPL body poses improve pedestrian trajectory prediction within a SOTA AV forecasting framework, and if so, what design choices drive the gain?*

We extend MTR with a *pose conditioning branch* that encodes the past 11 timesteps of SMPL body pose (Loper et al., 2015) using 6D rotation representations (Zhou et al., 2019), a GRU encoder, and auxiliary future-pose prediction heads. We train and evaluate on a pedestrian subset of the Waymo Open Motion Dataset (Ettinger et al., 2021) paired with LiDAR-derived SMPL pose pseudo-ground-truth from Waymo-3DSkelMo (Zhu et al., 2025), using minADE and minFDE over 6 predicted modes.

This paper deliberately reports both a *result* and a *correction of our own earlier result*, because the correction is instructive. An earlier single-run draft credited geodesic $SO(3)$ supervision with -7.6% minADE; an audit shows that was impossible—in our data condition the future pose targets are zero, so the geodesic loss is a constant with identically zero gradient and the two runs compared were the same experiment under different seeds (Section 4.3). We rebuilt the empirical claims with three to five seeds per configuration and paired bootstrap CIs over 6,688 validation pedestrians. Our corrected findings:

- **Without a strong backbone, no pose configuration reliably beats the baseline.** The GRU encoder of the earlier draft is heavy-tailed (8 replicates span 0.629–0.897, worse than the baseline’s 0.6604 on average). Cross-attention with sinusoidal positional encoding looked like a stable -3.5% at three seeds ($\sigma 0.0026$), but two more seeds—one a heavy-tailed failure—take it to 0.6549 ± 0.0278 and only -0.8% over baseline, not significant once seeds are resampled. Our own corrected headline was itself a small-sample artifact.
- **Temporal ordering carries what pose signal there is.** Adding a sinusoidal positional encoding to the cross-attention encoder improves it by -4.5% (the bag-of-frames variant $\approx$ baseline); auxiliary-loss composition is not a driver either—no active auxiliary beats the no-auxiliary control, and real future poses (99% coverage) do not help.
- **Pose helps in exactly one configuration, by $\sim 1.6\%$.** HD map alone is worth -26% and full-Waymo pretraining a further -22% (both trajectory-only). On top of the map, the cross-attention+PE encoder gives -1.6% (stable across five seeds, $p < 10^{-4}$)—the only seed-significant pose benefit we find; the GRU gives nothing with map, and the apparent pretrained pose benefit does not survive five seeds. A control ablation attributes most of even the -1.6% to a root-orientation channel derived from past heading.
- **Few-seed ablations need seed replication.** The spread among replicates of one configuration (0.27 minADE across 8 seeds’ extremes) exceeds every architectural effect except map and pretraining; *both* our earlier -7.6% and our first-corrected -3.5% headline were seed artifacts, caught only by replication. We describe the audit procedure so it transfers.

2 RELATED WORK

2.1 TRAJECTORY FORECASTING FOR AUTONOMOUS DRIVING

Modern trajectory prediction methods model multi-agent interactions over HD map features using transformer architectures (Vaswani et al., 2017; Shi et al., 2022; 2024; Yuan et al., 2021; Salzmann et al., 2020). Social GAN (Gupta et al., 2018) introduced generative multimodal prediction for pedestrians; MTR (Shi et al., 2022) advances this with global intention localization and local refinement via cross-attention over map and agent context. None of these methods incorporate body pose information.

2.2 HUMAN POSE ESTIMATION AND POSE REPRESENTATIONS

SMPL (Loper et al., 2015) provides a parametric body model where each joint rotation is represented as a 3D rotation matrix. For neural network learning, Zhou et al. (2019) demonstrate that 6D rotation representations (the first two columns of $SO(3)$) are continuous and better conditioned than quaternions or axis-angle, particularly under gradient-based optimization. The AMASS dataset

(Mahmood et al., 2019) provides a large-scale archive of motion-captured body animations in SMPL parameterization and is widely used to train human motion priors (Rempe et al., 2021; He et al., 2022). Waymo-3DSkelMo (Zhu et al., 2025) combines LiDAR-based human mesh recovery (Fan et al., 2023) with such priors to produce temporally coherent SMPL pose sequences for Waymo pedestrians; we use its output as pose pseudo-ground-truth. Works such as MotionBERT (Zhu et al., 2023) and HumanMAC (Chen et al., 2023) focus on pose quality but do not connect body pose to downstream trajectory prediction. A separate line uses 2D pose for pedestrian *crossing-intention* classification (Fang & López, 2018; Rasouli et al., 2019), supporting the premise that body configuration carries intent, though without producing metric trajectory forecasts.

2.3 JOINT POSE AND TRAJECTORY MODELS

Several recent works condition trajectory prediction on body pose. Salzmann et al. (2023) leverage 3D skeletal keypoints from RGB-D cameras to improve trajectory prediction in robot navigation scenarios. Saadatnejad et al. (2024) integrate 2D/3D skeleton pose cues into a transformer-based predictor on pedestrian benchmarks, and Gao et al. (2025) extend this line to social navigation datasets using skeleton-based body language features. In contrast, our work uses parametric SMPL body pose in 6D rotation space—a richer, anatomically-grounded representation—within the state-of-the-art MTR framework on Waymo, and, with seed-replicated experiments and per-pedestrian confidence intervals, isolates which design choices actually drive the gain: auxiliary pose-loss design, temporal encoding (GRU vs. cross-attention $\pm$ positional encoding), future-pose supervision quality, and the interaction of pose with HD map context and backbone pretraining.

3 METHOD

3.1 BACKGROUND: MOTION TRANSFORMER (MTR)

MTR (Shi et al., 2022) is a transformer-based trajectory predictor for the Waymo Open Motion Dataset. For each *center object* (the agent being predicted), it encodes a scene context tensor from agent histories and HD map polylines via a PointNet-like encoder, then decodes $K = 6$ trajectory modes through iterative cross-attention over the scene context, guided by K learned intention queries that are globally localized to trajectory clusters.

The loss has three components: a mode classification loss $\mathcal{L}_{\text{cls}}$, a winner-takes-all regression loss $\mathcal{L}_{\text{reg}}$, and a velocity consistency loss $\mathcal{L}_{\text{vel}}$.

3.2 POSE CONDITIONING BRANCH

We add a pose conditioning branch alongside the trajectory decoder, illustrated in Figure 1. The branch has four components:

6D Rotation Encoding. Each SMPL body pose at timestep t consists of 24 joint rotations. We represent each rotation as a 6D vector (Zhou et al., 2019) (the first two columns of the 3×3 rotation matrix), giving a 144D pose vector per timestep.

GRU Pose Encoder. Given the past $T = 11$ pose vectors $\mathbf{p}_1, \dots, \mathbf{p}_T \in \mathbb{R}^{144}$, a two-layer GRU with hidden size 256 processes the sequence:

$$\mathbf{h}_t = \text{GRU}(\mathbf{p}_t, \mathbf{h}_{t-1}), \quad \mathbf{h}_T \in \mathbb{R}^{256}. \quad (1)$$

The final hidden state $\mathbf{h}_T$ is concatenated with the MTR agent feature and projected to 256D via an MLP, forming the fused agent representation.

Pose Prediction Heads. Each of the decoder layers additionally predicts K modes of future poses: at layer ℓ and mode k , a linear head outputs 6D rotations for all 80 future timesteps (a 80×144 output). These heads are auxiliary—their predictions never feed back into the trajectory pathway; their only effect on trajectory prediction is through the gradients their losses send into the shared decoder features and the GRU encoder.

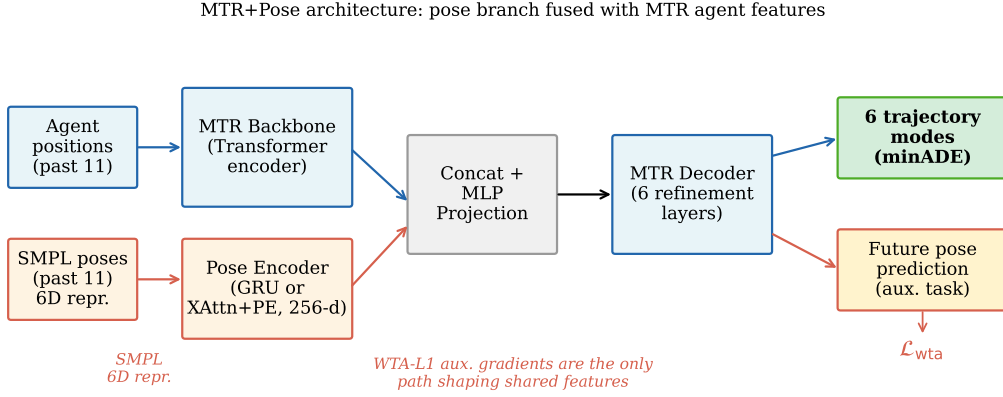


Figure 1: **MTR+Pose architecture.** A GRU pose encoder processes the past 11 SMPL body poses (each represented as a 144D 6D-rotation vector) and produces a 256D hidden state that is concatenated with the MTR agent feature and projected before the decoder. Auxiliary future-pose prediction heads are trained with a winner-takes-all L1 loss $\mathcal{L}_{wta}$ on 6D rotations; gradients from this auxiliary task are the only path by which pose supervision shapes the shared features. The trajectory decoder and map attention modules of MTR are unchanged.

Auxiliary Pose Losses. Let $\hat{\mathbf{r}}^{ij} \in \mathbb{R}^6$ be the predicted 6D rotation and $\mathbf{r}^{ij} \in \mathbb{R}^6$ be the ground-truth 6D rotation for joint j at future step i . We consider four auxiliary signals:

- **Winner-takes-all L1 (WTa-L1):** $\mathcal{L}_{wta}$ selects, per pedestrian, the pose mode closest to the ground truth in 6D L2 distance, and applies an L1 regression loss to that mode, masked by per-timestep trajectory validity. (In our configuration files this loss is named `gmm_pose` for historical reasons; it is a plain WTA regression, not a Gaussian mixture likelihood.)
- **Geodesic loss:** $\mathcal{L}_{geo} = \frac{1}{IJ} \sum_{i,j} \arccos\left(\text{clamp}\left(\frac{\text{tr}(\mathbf{R}_i^j \top \hat{\mathbf{R}}_i^j) - 1}{2}, -1 + \epsilon, 1 - \epsilon\right)\right)$, where $\mathbf{R}, \hat{\mathbf{R}} \in SO(3)$ are rotation matrices recovered from the 6D representations of the WTA-selected mode, averaged over all future steps (unmasked). The clamp ($\epsilon=10^{-7}$) avoids the divergent arccos derivative at the ± 1 boundary.
- **MPJPE:** $\mathcal{L}_{mpjpe} = \frac{1}{IJ} \sum_{i,j} \|\mathbf{x}_i^j - \hat{\mathbf{x}}_i^j\|_1$, where $\mathbf{x}$ are joint positions computed via forward kinematics on SMPL.
- **Pose mode classification:** $\mathcal{L}_{cls_pose}$, a cross-entropy loss on per-mode pose scores against the WTA-selected mode.

The total loss adds the three MTR motion terms ($\mathcal{L}_{cls} + \mathcal{L}_{reg} + 0.5 \mathcal{L}_{vel}$) to the weighted pose terms $w_{wta} \mathcal{L}_{wta} + w_{geo} \mathcal{L}_{geo} + w_{mpjpe} \mathcal{L}_{mpjpe} + w_{cls_pose} \mathcal{L}_{cls_pose}$; we ablate $w_{\star} \in \{0, 0.05, 0.1, 0.2\}$ (weights of 1.0 diverge to NaN through the SMPL forward pass, so all stable runs use $w \leq 0.2$).

A caveat discovered post-hoc: future pose ground truth is absent in the main data condition. In our primary (10 fps) data condition, SMPL pose observations cover only the *past* window ($t \leq 1.0$ s); future pose targets are zero for 99.99% of timesteps (5 of 91,520 in the training split). As we show analytically and empirically in Section 4.3, this renders the geodesic term *inert* (identically zero gradient against all-zero targets, which map to the all-zero matrix under Gram–Schmidt), while WTa-L1, MPJPE, and $\mathcal{L}_{cls_pose}$ stay active but pull predictions toward the degenerate zero targets. We report it prominently because it reverses a conclusion an earlier draft drew from single-run comparisons.

3.3 CROSS-ATTENTION POSE ENCODERS (ABLATION)

To isolate the contribution of temporal ordering from sequential integration, we test two cross-attention pose encoder variants. Let $\mathbf{q} \in \mathbb{R}^{256}$ be the MTR agent feature (projected query) and

$\mathbf{K}, \mathbf{V} \in \mathbb{R}^{11 \times 256}$ be the 11 projected pose frames (keys and values). The cross-attention output is:

$$\mathbf{c} = \text{softmax}\left(\frac{\mathbf{q}\mathbf{K}^\top}{\sqrt{256}}\right) \mathbf{V}, \quad (2)$$

and $\mathbf{c}$ is concatenated with $\mathbf{q}$ and projected to 256D, replacing $\mathbf{h}_T$ in the fusion step.

Cross-attention without positional encoding. No temporal information is injected before attention: $\mathbf{K} = \{W_K \mathbf{p}_t\}_{t=1}^{11}$, $\mathbf{V} = \{W_V \mathbf{p}_t\}_{t=1}^{11}$. This treats pose frames as a permutation-invariant set and tests whether the raw content of each pose frame—absent any ordering—is sufficient to condition trajectory prediction.

Cross-attention with sinusoidal positional encoding. Standard sinusoidal positional encoding (Vaswani et al., 2017) is added to the projected keys and values before attention: $\mathbf{K}' = \{W_K \mathbf{p}_t + \mathbf{e}_t\}_{t=1}^{11}$, where $\mathbf{e}_t$ is the fixed sinusoidal embedding for frame index $t \in \{0, \dots, 10\}$. This injects temporal ordering at zero extra parameter cost and tests whether ordering alone is sufficient, without the causal accumulation structure of a GRU.

4 EXPERIMENTS

4.1 DATASET AND SETUP

Dataset. We use a pedestrian-only subset of the Waymo Open Motion Dataset (Ettinger et al., 2021) paired with SMPL body pose pseudo-ground-truth from the Waymo-3DSkelMo pipeline (Zhu et al., 2025). The subset contains 579 training scenes (1,348 pedestrians, of which 1,144 have sufficient valid past observations to serve as prediction targets) and 5,171 validation scenes (8,282 pedestrians). Ground-truth future trajectories come from Waymo tracking data (91 timesteps at 10 Hz; 9.0 s total span — 1.0 s past plus an 8.0 s future horizon). 6,688 of the 8,282 validation pedestrians (80.8%) have valid future trajectory data and enter the evaluation.

Pose provenance. The SMPL poses are not motion-capture ground truth: they are estimated from Waymo LiDAR by the Waymo-3DSkelMo pipeline (Zhu et al., 2025), which fits per-frame SMPL bodies with LiDAR-HMR (Fan et al., 2023) and refines them with AMASS-trained motion priors (Mahmood et al., 2019; Rempe et al., 2021; He et al., 2022). Two properties matter for our results. *First*, pose observations exist only for the past window in our main condition, so no future information leaks into the inputs; the evaluation is sound. *Second*, the pipeline snaps the SMPL root rotation to the past-trajectory motion direction whenever the pedestrian is moving and the raw LiDAR estimate deviates by more than 90° , so the root-orientation channel is partially derived from position history the model already receives—an overlap we quantify in Section 4.4. Body configuration and gait within $\pm 90^\circ$ are genuinely perception-derived.

Evaluation. We report **minADE** (minimum Average Displacement Error over 6 modes, in meters) and **minFDE** (minimum Final Displacement Error). Lower is better. The evaluation covers the full 8.0 s future horizon (80 steps at 10 Hz).

Training and statistical protocol. All models train for 30 epochs with batch size 10 on a single RTX 4090 (AdamW, LR 10^{-4} , step decay $\times 0.5$ at epochs 10/20/25, gradient-norm clip 1.0); a full run takes 10–15 minutes. Validation is run at epochs 1, 2, 4, every second epoch up to 20, and every epoch from 21 to 30. Following common practice, our per-run headline number is the *best* validation minADE over these evaluations; because best-of- n selection on a noisy curve inflates apparent differences, every key comparison is additionally run with **three to five random seeds** (five for the headline, encoder, map, and pretrain cells; three for secondary cells), and we report mean $\pm$ std across seeds together with **paired bootstrap** 95% confidence intervals over the 6,688 evaluated pedestrians (per-pedestrian errors averaged across seeds, resampled jointly for both models in a pair; 10,000 resamples).

Scale caveat. The 579-scene training subset is a small fraction of the full Waymo training set ($\approx 487\text{k}$ scenarios), so absolute minADE values in Sections 4.2–4.5 are far from full-data state of the art; relative, seed-replicated comparisons between models trained on identical data are the object of study. Section 4.6 quantifies the scale effect directly.

Table 1: Main result (no map; best-checkpoint protocol; 5 seeds each). Per-seed values expose a heavy-tailed failure mode in *both* GRU- and attention-based pose conditioning (bold = degraded seeds) that mean $\pm$ std alone understates. No row is significantly below the baseline under a seed-resampling bootstrap.

Model	Aux. loss	minADE $\downarrow$ (mean $\pm$ std)	per-seed values
MTR (no pose)	—	0.6604 ± 0.0143	.655 .683 .664 .654 .646
MTR+POSE GRU, no aux	none active	0.6545 ± 0.0271	.696 .665 .639 .626 .647
MTR+POSE GRU, WTA-L1	$w=0.1$	0.6853 ± 0.0651	.639 .785 .629 .717 .657
MTR+POSE XAttn+PE, WTA-L1	$w=0.1$	0.6549 ± 0.0278	.640 .634 .637 .663 .700

4.2 MAIN RESULT: POSE CONDITIONING VS. BASELINE

Table 1 compares, over five seeds each, the trajectory-only MTR baseline against three pose-conditioned variants: the GRU encoder with the WTA-L1 auxiliary pose loss ($w=0.1$; the configuration an earlier draft mislabeled “geodesic-only”, see Section 4.3), the GRU encoder with *no* active auxiliary pose loss, and the cross-attention encoder with sinusoidal positional encoding (same WTA-L1 auxiliary loss).

The seed-replicated picture inverts the earlier draft’s headline, and cuts deeper than our first correction did. The GRU encoder with the WTA-L1 auxiliary loss—credited with -7.6% from one lucky run—is *worse than baseline on average*: two of five seeds converge to degraded optima (bold), and the pedestrian bootstrap puts it at $+3.8\%$ minADE. The cross-attention encoder with positional encoding *appeared* to deliver what the draft attributed to the GRU: at three seeds it was a remarkably stable -3.5% ($\sigma 0.0026$). Two additional seeds (404, 505) puncture this—seed 505 is a heavy-tailed failure (best-epoch 0.700, final-epoch minADE 1.0), and the five-seed cell is 0.6549 ± 0.0278 : a tenfold increase in spread and only -0.8% over baseline, *not* significant under a seed-resampling bootstrap ($p=0.70$). The attention encoder is thus heavy-tailed too; its three-seed stability was itself a small-sample artifact—the very failure mode this paper documents, now reproduced in our own corrected result. Under seed resampling, *no* no-map configuration—GRU or attention, with or without an auxiliary loss—reliably beats the no-pose baseline (the no-auxiliary GRU control is -0.9% pedestrian-bootstrap but $p=0.59$ hierarchical). Pose’s benefit, if any, must be sought where the trajectory backbone is already strong (Sections 4.5–4.6).

4.3 THE AUXILIARY-LOSS AUDIT: AN INERT TERM CREDITED WITH THE HEADLINE GAIN

An earlier draft ablated the pose supervision with one run per configuration and concluded geodesic-only supervision was the critical ingredient (0.6231, -7.6% vs. baseline 0.6745), beating “WTA-L1 only” (0.6467). Three facts reverse that conclusion.

Fact 1: the geodesic term received zero gradient. In the 10 fps data condition, future pose targets are zero for all but 5 of 91,520 training steps (Appendix A.2). A zero 6D target maps under Gram–Schmidt to the all-zero matrix $\mathbf{R}_{\text{gt}}=\mathbf{0}$, for which $\text{tr}(\hat{\mathbf{R}}^\top \mathbf{R}_{\text{gt}}) \equiv 0$ for *any* prediction, so $\mathcal{L}_{\text{geo}} \equiv \arccos(-\frac{1}{2})$, a constant; we verified its gradient is exactly zero (and nonzero under random targets).

Fact 2: the two compared configurations were therefore identical. The “geodesic-only” run also carried WTA-L1 at $w=0.1$, so with the geodesic term inert it ran the same training distribution as “WTA-L1 only”—their 0.0236 gap (0.6231 vs. 0.6467) is pure run-to-run noise, larger than most effects the draft reported.

Fact 3: seed replication measures the noise directly. Re-run with multiple seeds (Table 2), the pooled **eight** replicates of this single configuration span minADE 0.629–0.897 (0.7060 ± 0.0921); both draft values sit comfortably inside this one-configuration spread, confirming the “geodesic effect” was a draw from it.

Table 2: Pose supervision ablation, seed-replicated (no map, GRU encoder, $w=0.1$ for active losses). “No aux” has no active auxiliary pose loss (the inert geodesic term only), so the pose encoder is trained by trajectory gradients alone. The WTA-L1 row pools the draft’s “geodesic-only” and “WTA-L1 only” cells, which are functionally identical. Single-run draft values shown for comparison.

Aux. pose loss	minADE (mean $\pm$ std)	per-seed values	single-run (draft)
None (no pose)	0.6604 ± 0.0143	.655 .683 .664 .654 .646	0.6745
No aux (inert geo)	0.6545 ± 0.0271	.696 .665 .639 .626 .647	—
WTA-L1 (8 seeds, pooled)	0.7060 ± 0.0921	.639 .785 .629 .717 .657 .897 .662 .662	0.6467 / 0.6231 [†]
MPJPE + WTA-L1	0.6769 ± 0.0421	.724 .662 .644	0.6576
All (MPJPE+WTA+cls)	0.6574 ± 0.0237	.668 .674 .630	0.6532

[†]The earlier draft reported these as two different configurations (“WTA-L1 only” and “geodesic-only”); they are the same configuration, and their spread is seed noise.

Table 3: Temporal encoding ablation, seed-replicated (no map; WTA-L1 auxiliary loss at $w=0.1$ in all pose-conditioned variants).

Pose Encoder	Temporal info	minADE (mean $\pm$ std)	per-seed values
None (no pose)	—	0.6604 ± 0.0143	.655 .683 .664 .654 .646
Cross-attention, no PE	none (bag)	0.6667 ± 0.0407	.714 .641 .646
Cross-attention + sinus. PE	ordering only	0.6549 ± 0.0278	.640 .634 .637 .663 .700
GRU (sequential)	ordering + causal	0.6853 ± 0.0651	.639 .785 .629 .717 .657

The corrected interpretation reverses the draft on a second point as well: far from being “the critical ingredient”, the auxiliary losses are—with the GRU encoder and degenerate zero-valued targets—associated with *instability*. Four of eleven runs across the WTA-L1 and MPJPE+WTA-L1 cells converged badly (≥ 0.71), whereas the no-auxiliary control produced no such seed in five runs. At our statistical power the active-loss variants cannot be usefully ranked against one another, and the earlier draft’s mechanistic story about geodesic gradients shaping the GRU was fitted to noise.

The mask fix removes the instability, but adds no signal. Because the audit shows the pose losses train against absent targets, we re-ran the four audit cells with a corrected future-pose validity mask (losses averaged only over the $< 0.01\%$ of steps that carry a real target; this is the released code). Masking removes the catastrophic tail—the WTA-L1 cell’s worst seed falls from 0.897 to 0.679 ($\sigma\ 0.065 \rightarrow 0.011$)—confirming the instability came from training toward degenerate zero targets. But it does not turn the loss into a benefit: the masked WTA-L1 cell (0.6715 ± 0.0112) is still +5.5% worse than the masked no-auxiliary control (0.6365; hierarchical $p < 10^{-4}$), and the fix leaves the no-pose baseline unchanged (0.6602 ± 0.0149 masked vs. 0.6604; pedestrian bootstrap $p=0.95$, hierarchical $p=0.63$). The on-10fps auxiliary pose signal is, as predicted, inert.

Reproducibility note. Table 2 and the GRU/attention heavy tails were produced with the *pre-fix* code (tagged in the release); the released code masks the future-pose losses, so re-running these cells reproduces the masked numbers above rather than the table. The encoder, map, and pretraining results are mask-insensitive (past poses are non-zero on 10fps) and reproduce either way.

4.4 ABLATION: TEMPORAL ENCODING — GRU VS. CROSS-ATTENTION

Table 3 compares three temporal encoding strategies (three to five seeds each), all with the WTA-L1 auxiliary loss at $w=0.1$.

Ordering is necessary: the bag-of-frames encoder is slightly worse than the no-pose baseline (+1.0%)—unordered pose content contributes nothing—while adding only a fixed sinusoidal positional encoding improves the same architecture by -4.5% over the no-PE variant (CI $[-5.2, -3.7]$, $p=0.008$ hierarchical over the three shared seeds). Positional encoding thus genuinely helps the cross-attention encoder. What it does *not* do is lift that encoder clearly above using no pose at all: as

Table 4: Map $\times$ pose ablation, seed-replicated (5 seeds per cell; the GRU+map cell 3). WTA-L1 auxiliary loss at $w=0.1$ in pose cells. With map context the seed variance collapses by an order of magnitude relative to the no-map cells.

Pose Enc.	Map	minADE (mean $\pm$ std)	per-seed values
None	No map	0.6604 ± 0.0143	.655 .683 .664 .654 .646
None	With map	0.4854 ± 0.0047	.490 .484 .489 .478 .486
GRU	No map	0.6853 ± 0.0651	.639 .785 .629 .717 .657
GRU	With map	0.4854 ± 0.0057	.480 .491 .485
XAttn+PE	With map	0.4778 ± 0.0041	.477 .481 .480 .471 .480

Section 4.2 shows, at five seeds xattn+PE is heavy-tailed and only -0.8% over baseline (n.s.). The GRU is worse still (its $0.629\text{--}0.897$ spread is wider than the attention encoder’s), so the draft’s “GRU beats attention” ranking does reverse—but neither encoder is a stable improvement over the no-pose baseline in this no-map regime.

Root orientation carries what gain there is. A control ablation exposes *what* in the pose the encoder uses. Zeroing the root-orientation channel of the xattn+PE input (joint 0; body joints untouched) raises minADE to 0.6633 ± 0.0031 —statistically *indistinguishable from the no-pose baseline* (0.6604 ; hierarchical $p=0.51$) and $+4.1\%$ worse than the (three-seed) xattn+PE model (hierarchical CI $[+3.1, +5.3]\%$, $p<10^{-4}$). So even in the seeds where the encoder does well, its advantage rides entirely on the root-orientation channel, which the Waymo-3DSkelMo pipeline partially derives from past-trajectory heading (Section 4.1). The usable pose signal is essentially heading re-entering through a side channel, not body configuration.

4.5 ABLATION: HD MAP CONTEXT

The experiments above use zero-padded map features (the SMPL-paired pedestrian subset was originally processed without HD map polylines). To quantify how map context interacts with pose conditioning, we enable HD map loading and train the 2×2 factorial design: $\pm\text{map} \times \pm\text{pose}$ (GRU encoder, WTA-L1 auxiliary loss at $w=0.1$), three seeds per cell.

Table 4 reveals three findings. *First*, HD map is the dominant signal: it alone reduces minADE by 26.5% (CI $[-29.0, -24.1]$), far more than any pose effect, since routing is encoded directly in the map. *Second*, this is where pose’s one seed-significant benefit lives—and it requires the right encoder. The GRU cell is *identical* to no-pose+map at five seeds (-0.0% , $p=0.99$), but the xattn+PE encoder gives -1.57% (hierarchical CI $[-2.4, -0.8]\%$, $p<10^{-4}$, five seeds both arms). Unlike the no-map xattn+PE cell, this one is *stable* ($\sigma 0.004$): the map both supplies context and tames the encoder’s heavy tail. The benefit is still small—partial redundancy between body orientation and the map’s routing constraints, and the root-orientation channel’s derivation from past heading (Sections 4.4, 4.1) accounts for most of it. *Third*, map context stabilizes training generally: per-seed spread collapses ($\sigma \leq 0.006$ vs. up to 0.135 without map; Table 7), and the failure mode of Section 4.2 never occurs in a map-enabled seed.

4.6 ABLATION: BACKBONE PRETRAINING ON FULL WAYMO

The 579-scene subset used above is $\approx 0.12\%$ of the full Waymo training set ($\approx 487\text{k}$ scenarios; $486,995$ exactly). To test whether dataset scale is the binding constraint on absolute accuracy, and to isolate pose’s contribution when the backbone already encodes a strong trajectory prior, we run a final 2×2 ablation: $\pm\text{pretrain} \times \pm\text{pose}$, with HD map enabled in all four cells.

We pretrain the trajectory-only backbone (no pose encoder) on the full Waymo pedestrian set— $231,507$ per-agent training examples drawn from $486,995$ scenarios—for 30 epochs with the same hyperparameters as before. To avoid corrupting this backbone at fine-tune iter 0, we use a *residual zero-init* pose fuser: its output is *added* to the backbone feature and its final linear layer is zero-initialized, so the pose pathway contributes exactly zero initially (the backbone passes through unchanged) and warms up additively.

Table 5: Pretrain $\times$ pose ablation, seed-replicated (five seeds per cell; the two GRU cells three). All runs include HD map and use 30-epoch fine-tuning on the 579-scene subset (the no-pretrain rows repeat Table 4’s map cells). Pretrained variants load the same full-Waymo backbone checkpoint via residual zero-init pose fusion; fine-tuning seeds vary.

Pretrain	Pose Enc.	minADE (mean $\pm$ std)	minFDE (mean $\pm$ std)	per-seed minADE
None	—	0.4854 $\pm$ 0.0047	1.0493 $\pm$ 0.0150	.490 .484 .489 .478 .486
None	GRU	0.4854 $\pm$ 0.0057	1.0362 $\pm$ 0.0060	.480 .491 .485
Full Waymo	—	0.3745 $\pm$ 0.0071	0.7915 $\pm$ 0.0159	.382 .375 .380 .371 .364
Full Waymo	GRU	0.3718 $\pm$ 0.0059	0.7809 $\pm$ 0.0097	.374 .376 .365
Full Waymo	XAttn+PE	0.3718 $\pm$ 0.0034	0.7890 $\pm$ 0.0111	.371 .371 .378 .369 .370

Pretraining is the second dominant lever and is robust: it reduces minADE by 22.9% without pose and 23.4% with pose ($p < 10^{-4}$)—by far the largest effect after map, and, like map, trajectory-only. The pose contribution *on top*, however, does not survive five seeds. At three seeds it looked like -1.9% ; extending the no-pose fine-tune to five seeds (its two extra seeds are among its best) shrinks the gap to -0.7% for both encoders—hierarchical bootstrap $p=0.35$ (xattn+PE) and $p=0.09$ (GRU), neither significant. The two encoders are themselves indistinguishable once pretrained ($+0.4\%$, $p=0.77$), so the from-scratch encoder distinction vanishes against a strong prior. The residual zero-init fuser keeps every pretrained cell stable (no failure seeds), but pretraining, like the no-map condition, does not establish a pose benefit—only the map $\times$ xattn+PE cell does. Qualitative examples are in Appendix A.7, Figure 4.

5 ANALYSIS AND INSIGHTS

How an inert loss became a headline result. The failure chain is worth spelling out because none of its links is exotic: a data condition silently degenerated (all-zero future-pose targets), the loss evaluated to a smooth constant with *zero* gradient rather than crashing, two functionally identical configurations were each run once, and the resulting 0.024 seed gap was read as a 3.8% design effect and given a mechanistic story. The audit that caught it generalizes to two cheap checks: verify the *target coverage* of every auxiliary loss against the data, and check the *gradient* of every loss term in isolation on a real batch.

What little the pose branch does, and how. Where pose helps at all (the map cell), the signal is *temporal* and comes from *encoding*, not supervision. Unordered pose content is useless (bag-of-frames $\approx$ baseline), and attention extracts the ordered signal more reliably than the GRU (Section 4.4). Supervision adds nothing: real dense future-pose targets—the only condition in which the rotation-space losses carry gradient—do not move accuracy (Appendix A.5), and the auxiliary WTA-L1 loss is not required (the no-auxiliary control matches or edges the active-loss cells, though it too is not seed-significant). Its degenerate zero targets are plausibly counterproductive, anchoring shared features toward a constant, which may explain why the heavy-tailed failures of no-map pose runs (6 of 27, 22%, reach minADE ≥ 0.70 ; bad basins, not late divergence) concentrate in auxiliary-active GRU cells and vanish with map context or pretraining—reinforcing that on small benchmarks per-seed values or failure rates must be reported, not seed means alone.

6 LIMITATIONS

Dataset scale, and why we cannot go bigger. Our ablations use a 579-scene subset, and SMPL pose pseudo-ground-truth exists *only* for this subset—the full-Waymo backbone we pretrain is necessarily trajectory-only. Pose-conditioning at full scale is therefore not just uncomputed but infeasible with current annotations. Within reach, pretraining does not rescue pose: the pretrained pose benefit that looked like -1.9% at three seeds fell to -0.7% (n.s.) once the no-pose fine-tune was measured at five seeds. Whether denser or cleaner pose labels at scale would change the picture is untestable here.

Pose provenance and decoder. The LiDAR-derived SMPL pseudo-ground-truth (Waymo-3DSkelMo) is matched to Waymo tracks; its root-orientation correction partially couples the root

channel to past trajectory (Section 4.1), so part of the pose signal overlaps with observed position history—indeed, zeroing that channel removes the entire xattn+PE gain (Section 4.4), so much of the benefit is heading re-entering, not new body information. Online pose estimation in deployment would also carry different noise, and we do not evaluate predicted-pose quality independently (our metric is trajectory only).

Statistical power and two bootstrap levels. Our primary paired bootstrap resamples pedestrians on *seed-averaged* errors; we also report a *hierarchical* bootstrap resampling seeds then pedestrians—the conservative test we rely on for significance. Under it the map (−26%) and pretraining (−22%) trajectory effects survive strongly ($p < 10^{-4}$), and exactly one pose effect does—map $\times$ xattn+PE, −1.6%, $p < 10^{-4}$ —while every other pose margin does not (no-map xattn+PE $p = 0.70$, GRU+map $p = 0.99$, pretrained pose $p = 0.35$). The pedestrian-only bootstrap would have called several of these significant; requiring seed resampling is what caught two of our own headline claims. The best-checkpoint protocol (kept for comparability) selects on validation noise; all CIs cover one validation split only.

7 CONCLUSION

We have presented MTR+POSE, a pose-conditioned extension of the Motion Transformer that incorporates past SMPL body poses via a GRU encoder with 6D rotation representations, together with a seed-replicated measurement of what pose conditioning is worth and an audit that retracts our own earlier headline claim. Our conclusions: (1) the previously credited geodesic SO(3) supervision was inert—zero gradient against absent future-pose targets—so its 7.6% was seed noise between two identical configurations. (2) In the no-map condition *no* configuration reliably beats the no-pose baseline: cross-attention+PE looked like a stable −3.5% at three seeds but is heavy-tailed at five (−0.8%, n.s.)—a second small-sample artifact, in a paper about small-sample artifacts. (3) Pose helps in exactly one configuration: the cross-attention+PE encoder *with* HD map, by −1.6% (stable across five seeds, $p < 10^{-4}$). The GRU gives nothing with map, and the apparent pretrained pose benefit does not survive five seeds; a control ablation attributes most of even the surviving −1.6% to a root-orientation channel derived from past heading. (4) The mechanism is the past-pose encoder, not future-pose prediction. The audit and seed-replication methodology—which caught two of our own headline claims—not the pose numbers, is our intended lasting contribution.

REPRODUCIBILITY STATEMENT

All experiments use the publicly available Waymo Open Motion Dataset and the open-source Waymo-3DSkelMo pose-extraction pipeline; neither is redistributed by us. Training configurations (YAML), the multi-seed launch script, the per-pedestrian metric logger, and the bootstrap analysis script are included in our code release, together with the exact random seeds (101/202/303, plus 404/505 for the headline, encoder, map, and pretrain cells) and the per-epoch validation protocol described in Section 4.1. Appendix A lists all hyperparameters; Appendix A.2 documents dataset construction, including the timestamp-alignment and future-pose-coverage details on which the inert-gradient analysis rests. We will release the code upon publication.

ACKNOWLEDGMENTS

The authors gratefully acknowledge access to GPU compute (RTX 4090) and the publicly available Waymo Open Motion Dataset.

LLM DISCLOSURE

The authors used large language model (LLM) assistance (Claude, Anthropic) during the preparation of this manuscript for writing drafts, code assistance, and literature search support. All experimental results, scientific analysis, and conclusions are the authors’ own.

REFERENCES

Ling-Hao Chen, Jiawei Zhang, Yewen Li, Yiren Pang, Xiaobo Xia, and Tongliang Liu. HumanMAC: Masked motion completion for human motion prediction. In *2023 IEEE/CVF International Con-*

- ference on Computer Vision (ICCV), pp. 9510–9521. IEEE, October 2023. doi: 10.1109/iccv51070.2023.00875. URL <http://dx.doi.org/10.1109/iccv51070.2023.00875>.
- Scott Ettinger, Shuyang Cheng, Benjamin Caine, Chenxi Liu, Hang Zhao, Sabeek Pradhan, Yuning Chai, Ben Sapp, Charles Qi, Yin Zhou, Zoey Yang, Aurelien Chouard, Pei Sun, Jiquan Ngiam, Vijay Vasudevan, Alexander McCauley, Jonathon Shlens, and Dragomir Anguelov. Large scale interactive motion forecasting for autonomous driving : The waymo open motion dataset. In *2021 IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 9690–9699. IEEE, October 2021. doi: 10.1109/iccv48922.2021.00957. URL <http://dx.doi.org/10.1109/iccv48922.2021.00957>.
- Bohao Fan, Wenzhao Zheng, Jianjiang Feng, and Jie Zhou. LiDAR-HMR: 3D human mesh recovery from LiDAR. *arXiv preprint arXiv:2311.11971*, 2023.
- Zhijie Fang and Antonio M. López. Is the pedestrian going to cross? answering by 2d pose estimation. In *2018 IEEE Intelligent Vehicles Symposium (IV)*, pp. 1271–1276, 2018. doi: 10.1109/IVS.2018.8500413.
- Yang Gao, Saeed Saadatnejad, and Alexandre Alahi. Social-pose: Leveraging body language for pedestrian trajectory prediction. *IEEE Transactions on Intelligent Transportation Systems*, 2025. URL <https://arxiv.org/abs/2507.22742>. arXiv:2507.22742.
- Agrim Gupta, Justin Johnson, Li Fei-Fei, Silvio Savarese, and Alexandre Alahi. Social GAN: Socially acceptable trajectories with generative adversarial networks. In *2018 IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 2255–2264. IEEE, June 2018. doi: 10.1109/cvpr.2018.00240. URL <http://dx.doi.org/10.1109/CVPR.2018.00240>.
- Chengan He, Jun Saito, James Zachary, Holly Rushmeier, and Yi Zhou. NeMF: Neural motion fields for kinematic animation. In *Advances in Neural Information Processing Systems*, volume 35, 2022.
- Matthew Loper, Naureen Mahmood, Javier Romero, Gerard Pons-Moll, and Michael J. Black. SMPL: a skinned multi-person linear model. *ACM Transactions on Graphics*, 34(6):1–16, October 2015. ISSN 1557-7368. doi: 10.1145/2816795.2818013. URL <http://dx.doi.org/10.1145/2816795.2818013>.
- Naureen Mahmood, Nima Ghorbani, Nikolaus F. Troje, Gerard Pons-Moll, and Michael Black. AMASS: Archive of motion capture as surface shapes. In *2019 IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 5441–5450. IEEE, October 2019. doi: 10.1109/iccv.2019.00554. URL <http://dx.doi.org/10.1109/iccv.2019.00554>.
- Amir Rasouli, Iuliia Kotseruba, Toni Kunic, and John K. Tsotsos. PIE: A large-scale dataset and models for pedestrian intention estimation and trajectory prediction. In *2019 IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 6261–6270, 2019. doi: 10.1109/ICCV.2019.00636.
- Davis Rempe, Tolga Birdal, Aaron Hertzmann, Jimei Yang, Srinath Sridhar, and Leonidas J. Guibas. HuMoR: 3D human motion model for robust pose estimation. In *2021 IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 11468–11479, 2021. doi: 10.1109/ICCV48922.2021.01129.
- Saeed Saadatnejad, Yang Gao, Kaouther Messaoud, and Alexandre Alahi. Social-transmotion: Promptable human trajectory prediction. In *International Conference on Learning Representations*, 2024. URL <https://arxiv.org/abs/2312.11455>.
- Tim Salzmann, Boris Ivanovic, Punarjay Chakravarty, and Marco Pavone. *Trajectron++: Dynamically-Feasible Trajectory Forecasting with Heterogeneous Data*, pp. 683–700. Lecture Notes in Computer Science. Springer International Publishing, 2020. ISBN 9783030585235. doi: 10.1007/978-3-030-58523-5_40. URL http://dx.doi.org/10.1007/978-3-030-58523-5_40.
- Tim Salzmann, Lewis Chiang, Markus Ryll, Dorsa Sadigh, Carolina Parada, and Alex Bewley. Robots that can see: Leveraging human pose for trajectory prediction. *IEEE Robotics and Automation Letters*, 8(11):7090–7097, November 2023. doi: 10.1109/LRA.2023.3312035. URL <https://doi.org/10.1109/LRA.2023.3312035>.

- Shaoshuai Shi, Li Jiang, Dengxin Dai, and Bernt Schiele. Motion transformer with global intention localization and local movement refinement. In S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh (eds.), *Advances in Neural Information Processing Systems*, volume 35, pp. 6531–6543. Curran Associates, Inc., 2022. URL https://proceedings.neurips.cc/paper_files/paper/2022/file/2ab47c960bfee4f86dfc362f26ad066a-Paper-Conference.pdf.
- Shaoshuai Shi, Li Jiang, Dengxin Dai, and Bernt Schiele. MTR++: Multi-agent motion prediction with symmetric scene modeling and guided intention querying. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 46(5):3955–3971, May 2024. ISSN 1939-3539. doi: 10.1109/tpami.2024.3352811. URL <http://dx.doi.org/10.1109/tpami.2024.3352811>.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Lukasz Kaiser, and Illia Polosukhin. Attention is all you need. In I. Guyon, U. Von Luxburg, S. Bengio, H. Wallach, R. Fergus, S. Vishwanathan, and R. Garnett (eds.), *Advances in Neural Information Processing Systems*, volume 30. Curran Associates, Inc., 2017. URL https://proceedings.neurips.cc/paper_files/paper/2017/file/3f5ee243547dee91fbd053c1c4a845aa-Paper.pdf.
- Ye Yuan, Xinshuo Weng, Yanglan Ou, and Kris Kitani. Agentformer: Agent-aware transformers for socio-temporal multi-agent forecasting. In *2021 IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 9793–9803. IEEE, October 2021. doi: 10.1109/iccv48922.2021.00967. URL <http://dx.doi.org/10.1109/iccv48922.2021.00967>.
- Yi Zhou, Connelly Barnes, Jingwan Lu, Jimei Yang, and Hao Li. On the continuity of rotation representations in neural networks. In *2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 5738–5746. IEEE, June 2019. doi: 10.1109/cvpr.2019.00589. URL <http://dx.doi.org/10.1109/CVPR.2019.00589>.
- Guangxun Zhu, Shiyu Fan, Hang Dai, and Edmond S. L. Ho. Waymo-3DSkelMo: A multi-agent 3D skeletal motion dataset for pedestrian interaction modeling in autonomous driving. In *Proceedings of the 33rd ACM International Conference on Multimedia*, pp. 13184–13190, 2025.
- Wentao Zhu, Xiaoxuan Ma, Zhaoyang Liu, Libin Liu, Wayne Wu, and Yizhou Wang. Motion-BERT: A unified perspective on learning human motion representations. In *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*, pp. 15039–15053. IEEE, October 2023. doi: 10.1109/iccv51070.2023.01385. URL <http://dx.doi.org/10.1109/ICCV51070.2023.01385>.

A ADDITIONAL EXPERIMENTAL DETAILS

A.1 ARCHITECTURE HYPERPARAMETERS

- GRU pose encoder: GRU(input=144, hidden=256, layers=2, dropout=0.1); ≈ 505 K parameters total including fusion MLP
- Cross-attention pose encoder: pose projection 144 $\rightarrow$ 256, MultiheadAttention(embed_dim=256, num_heads=8, dropout=0.1, batch_first=True); ≈ 497 K parameters total including fusion MLP
- Pose input dimension: 144 (24 joints $\times$ 6D rotation)
- Past pose window: 11 timesteps (1.0 second at 10 Hz)
- Number of predicted trajectory modes: $K = 6$
- Number of future steps: 80 (8.0 seconds)
- MTR context encoder: 6 local-attention transformer layers, 256 hidden dim, 8 heads, attention dropout 0.1
- MTR decoder: 6 layers, hidden dim 512 (map branch 256), 8 heads
- Batch size: 10
- Optimizer: AdamW, $\beta_1 = 0.9$, $\beta_2 = 0.999$, weight decay 0.01

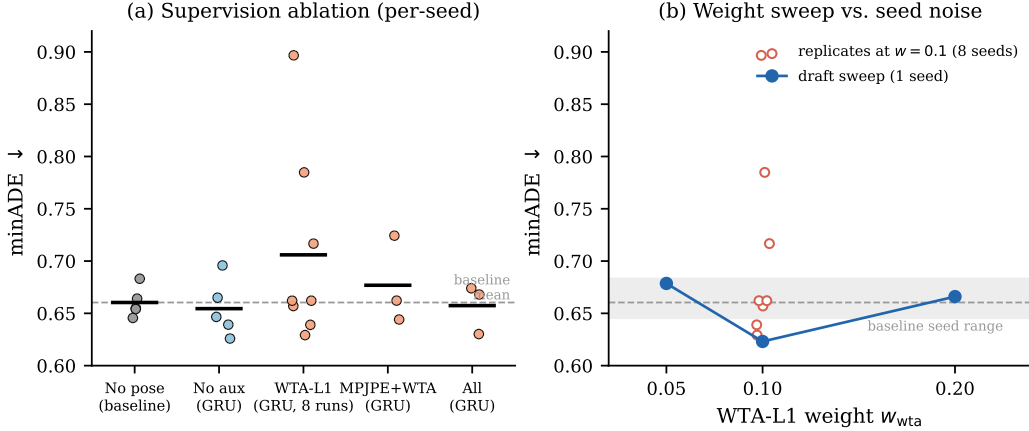


Figure 2: **Loss ablation and WTA-L1 weight sensitivity.** *Left:* minADE for the seed-replicated supervision configurations (Table 2); markers show individual seeds. *Right:* single-seed sensitivity to the auxiliary WTA-L1 weight ($w \in \{0.05, 0.1, 0.2\}$), with the seed-noise scale measured in Section 4.3 shown as a shaded band. Within that noise, the apparent optimum at $w=0.1$ is weak evidence at best.

- LR schedule: initial LR 1×10^{-4} , step decay $\times 0.5$ at epochs 10, 20, 25
- Epochs: 30
- Gradient clipping: norm ≤ 1.0
- Random seeds for replicated runs: 101, 202, 303 (plus 404, 505 for headline cells)

A.2 DATASET CONSTRUCTION

Waymo agent future trajectories are stored in `processed_scenarios/` PKL files with shape `(num_agents, 91, 10)`. SMPL pedestrian files are matched to Waymo object IDs via integer stem matching. 6,688 of 8,282 validation pedestrians (80.8%) have a valid future-trajectory match and are evaluated; the remainder are excluded. The 91-step grid spans $[0, 9.0]$ seconds; SMPL timestamps (originally in microseconds) are divided by 10^6 before alignment. In the 10 fps condition the SMPL observations cover only $[0, 1.0]$ s (the past window): across the entire training split only 5 of 91,520 future pose-target steps are nonzero, which is the basis for the inert-geodesic-gradient analysis in Section 4.3.

A.3 LOSS WEIGHT STABILITY

At $w = 1.0$, gradient explosion through the SMPL forward kinematics causes NaN divergence at epoch 3. The geodesic loss gradient norm was also found to diverge at the ± 1 boundary of the `arccos` argument; we clamp to $[-1 + \epsilon, 1 - \epsilon]$ with $\epsilon = 10^{-7}$. At $w = 0.1$, training is stable for all 30 epochs across all ablation variants.

A.4 AUXILIARY LOSS WEIGHT

The earlier draft swept what it believed was the geodesic weight and found a “sharp optimum” at $w=0.1$: $w=0.05$ gave 0.6786 and $w=0.2$ gave 0.6660, both single runs. Two corrections apply. First, because the geodesic term is inert, the sweep actually varied the *WTA-L1* weight (both weights were scaled together in those configurations). Second, the differences involved (0.02–0.06) overlap the seed-noise scale measured in Section 4.3, so the curvature of this one-seed sweep should not be read as a calibrated sensitivity estimate. What survives: $w=0.1$ is a reasonable default, and we did not find evidence that performance is improved by halving or doubling it.

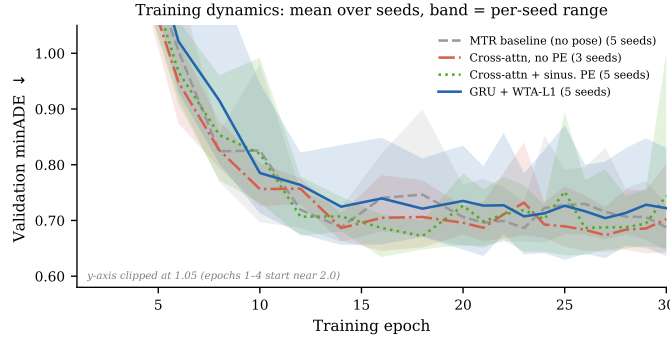


Figure 3: **Training dynamics.** Validation minADE over training for the temporal encoding variants; lines are means over seeds, bands the per-seed range. Epoch-to-epoch and seed-to-seed variability is of the same order as the differences between several variants, which is why all comparisons in this paper are seed-replicated.

A.5 ABLATION: FUTURE POSE SUPERVISION QUALITY

To localize the source of improvement, we compare two data conditions, both with the full auxiliary loss set at $w=0.1$, **seed-replicated (three seeds each)**: (a) *no future poses* — future-pose GT is zero, only past poses are observed (the inert-loss condition of our other ablations): minADE 0.6574 ± 0.0237 ; and (b) *30fps motion-prior-completed future poses* — the Waymo-3DSkelMo pipeline infills 99% of future timesteps as pseudo-GT, the one setting in which the geodesic and MPJPE terms receive real, non-degenerate gradients: minADE 0.6480 ± 0.0123 .

Activating the future-pose losses changes minADE by -1.4% (hierarchical bootstrap CI $[-3.1, +0.4]\%$, $p=0.13$): **not significant**. Giving the rotation-space losses genuine gradients does not reliably improve trajectory accuracy over the inert condition — consistent with our single-run pilot (0.6567 vs. 0.6532), but now with calibrated uncertainty. (Against the no-pose baseline the 30 fps model is -1.9% , only borderline at three seeds, $p \approx 0.05$ — the small, fragile encoder effect seen throughout, not a supervision effect.) Whatever benefit pose conditioning provides comes from the past-pose encoder, not the future-pose prediction task.

A.6 TRAINING DYNAMICS

Figure 3 shows validation minADE over 30 training epochs for the temporal encoding variants, with per-seed bands (five seeds for xattn+PE and the GRU, three for no-PE). Two qualitative observations are stable across seeds: cross-attention without positional encoding tracks the trajectory-only baseline throughout, and the pose-conditioned variants exhibit larger epoch-to-epoch variability than the baseline. The failure mode is a bad basin, not a late-training collapse: both the GRU’s failed seeds (plateaus near 0.72 – 0.83) and the cross-attention+PE failure seed (505) sit high from early in training. At five seeds the xattn+PE band is no longer the narrowest—its three-seed tightness was the sampling artifact discussed in Section 4.2.

A.7 QUALITATIVE EXAMPLES

A.8 ORIGINAL SINGLE-RUN RESULTS (EARLIER DRAFT)

Table 6 reports all 19 single-seed runs of the earlier draft, with loss labels corrected per the audit: “geo” terms were inert (zero gradient, Section 4.3), so the functional supervision is what remains after removing them. Runs 009 and 010 are functionally identical; their spread is seed noise. These runs use unrecorded seeds and are superseded by the seed-replicated matrix of Table 7.

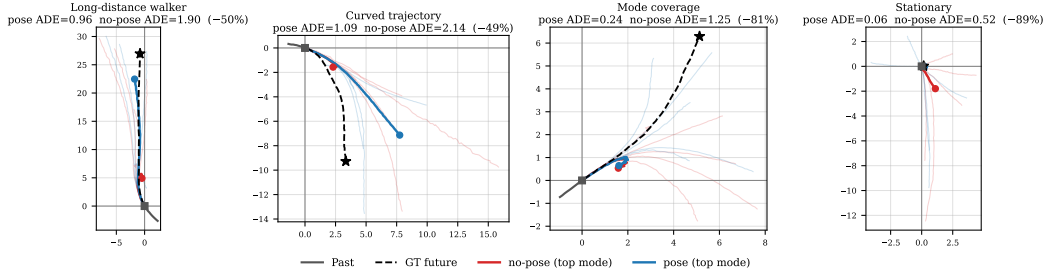


Figure 4: **Qualitative comparison at full-Waymo-pretrained scale.** Four validation scenes. Past in gray; GT future dashed black with $\star$ endpoint. All 6 predicted modes faded; top-scoring mode highlighted (red: no-pose; blue: pose). Per-scene minADE in titles. Scenes selected from the largest per-pedestrian improvements of the pose model, so these illustrate the failure modes pose can fix, not typical magnitudes. *Long-distance*: no-pose stops at 5m; pose follows the 25m walk. *Curved*: no-pose underestimates displacement; pose follows the curve. *Mode coverage*: both top modes underestimate, but pose has a faded mode aligned with GT. *Stationary*: no-pose wrongly predicts motion; pose correctly stays near origin.

Table 6: Earlier-draft single runs (corrected labels). “Functional losses” removes inert terms; w in parentheses. Baseline for Δ is run 004. Runs 001–002 are invalid (zero future trajectory GT).

Run	Draft tag	Encoder	Functional losses / Map / Pretrain	minADE	Δ
001	full pose	GRU	all (1.0)	0.6114	<i>invalid</i>
002	no pose	—	traj only	0.7724	<i>invalid</i>
003	full	GRU	mpipe+wta+cls (0.1)	0.6532	−3.2%
004	baseline	—	traj only	0.6745	—
005	full $w=0.05$	GRU	mpipe+wta+cls (0.05)	0.6557	−2.8%
006	full $w=0.2$	GRU	mpipe+wta+cls (0.2)	0.6542	−3.0%
007	30fps	GRU	mpipe+geo+wta+cls (0.1), real future	0.6567	−2.6%
008	“mpipe only”	GRU	mpipe+wta (0.1)	0.6576	−2.5%
009	“wta only”	GRU	wta (0.1)	0.6467	−4.1%
010	“geo only”	GRU	wta (0.1) [geo inert]	0.6231	−7.6%
011	“geo $w=0.05$ ”	GRU	wta (0.05) [geo inert]	0.6786	+0.6%
012	“geo $w=0.2$ ”	GRU	wta (0.2) [geo inert]	0.6660	−1.3%
013	cross-attn	XAttn	wta (0.1) [geo inert]	0.6765	+0.3%
014	xattn+PE	XAttn+PE	wta (0.1) [geo inert]	0.6337	−6.0%
015	no-pose+map	—	traj only + map	0.4880	−27.7%
016	pose+map	GRU	wta (0.1) + map [geo inert]	0.4797	−28.9%
017	pretrain	—	traj only + map (full Waymo, 231k peds)	—	<i>ckpt only</i>
018	finetune pose	GRU	wta (0.1) + map, pretrained	0.3749	−44.4%
019	finetune no-pose	—	traj + map, pretrained	0.3861	−42.8%

A.9 SEED-REPLICATED MATRIX

Table 7 lists every run of the replication matrix (seeds 101/202/303, plus 404/505 for the headline, encoder, map, and pretrain cells). The four audit cells were additionally re-run with the future-pose mask fix (Section 4.3); those masked runs are in the code release.

Table 7: Seed-replicated matrix: best-checkpoint minADE per seed (seeds 101/202/303, plus 404/505 for headline cells). All runs 30 epochs, identical protocol; “geo (inert)” marks the zero-gradient geodesic term carried by some configurations.

Cell	Configuration	minADE mean $\pm$ std	per-seed values
baseline	no pose	0.6604 ± 0.0143	.6550 .6831 .6641 .6541 .6456
geo_pure	GRU, no active aux (geo inert)	0.6545 ± 0.0271	.6958 .6650 .6392 .6259 .6466
wta01	GRU, WTA-L1 + geo (inert)	0.6853 ± 0.0651	.6390 .7848 .6292 .7167 .6570
gmm_only	GRU, WTA-L1 (same config as wta01)	0.7403 ± 0.1354	.8967 .6621 .6621
mpjpe	GRU, MPJPE + WTA-L1	0.6769 ± 0.0421	.7243 .6622 .6441
full	GRU, MPJPE+WTA+cls (geo inert)	0.6574 ± 0.0237	.6680 .6740 .6302
xattn	XAttn no PE, WTA-L1 (+ geo inert)	0.6667 ± 0.0407	.7136 .6408 .6457
xattn_pe	XAttn+PE, WTA-L1 (geo inert)	0.6549 ± 0.0278	.6395 .6343 .6374 .6631 .7002
norootorient	XAttn+PE, root-orient zeroed	0.6633 ± 0.0031	.6627 .6666 .6605
pose30fps	GRU, full loss, 30 fps future poses	0.6480 ± 0.0123	.6559 .6542 .6338
map_nopose	no pose, with map	0.4854 ± 0.0047	.4903 .4839 .4886 .4783 .4860
map_wta01	GRU, WTA-L1, with map	0.4854 ± 0.0057	.4798 .4911 .4853
map_xattn_pe	XAttn+PE, WTA-L1, with map	0.4778 ± 0.0041	.4769 .4811 .4795 .4710 .4804
ft_nopose	no pose, map, pretrained	0.3745 ± 0.0071	.3815 .3753 .3804 .3706 .3645
ft_wta01	GRU, WTA-L1, map, pretrained	0.3718 ± 0.0059	.3744 .3760 .3651
ft_xattn_pe	XAttn+PE, WTA-L1, map, pretrained	0.3718 ± 0.0034	.3710 .3712 .3777 .3694 .3697