yellobrik

OCM 1841, OCM 1842 OCM 1843, OCM 1844

4 Channel CWDM Multiplexers / Demultiplexers


- Send / receive up to 4 channels over a single fiber link
- Passive operation (no power required)
- Combine all four modules for up to 16 channels
- LC/PC single mode optical connections
- Optional 1/2 RU 19" rack frame (RFR 1018)


The **OCM 1841, OCM 1842, OCM 1843, OCM 1844** are compact CWDM passive 4 channel optical multiplexers / demultiplexers designed to send and receive up to 4 individual signals over a single fiber link. Each module has an UPG (Upgrade) port to cascade into the other 4 channel modules, expanding the capability of the system to a maximum of 16 channels.

The modules can be used standalone or integrated into the optional RFR 1018 1/2 RU 19" rack frame, which can accommodate all four modules. Ideal for system installations.

Ideally suited for use with the CWDM yellobrik fiber modules (all 16 wavelengths are available).

Model	Channel 1	Channel 2	Channel 3	Channel 4
OCM 1841	1270nm	1290nm	1310nm	1330nm
OCM 1842	1350nm	1370nm	1390nm	1410nm
OCM 1843	1470nm	1490nm	1510nm	1530nm
OCM 1844	1550nm	1570nm	1590nm	1610nm

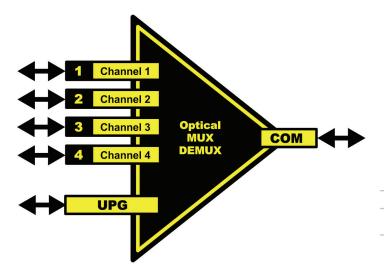



Technical Specifications

Optical I/O

4 x Fiber Optic I/O channels

Center frequencies taken from ITU-T G.694.2 **OCM 1841** = 1270,1290,1310,1330nm

OCM 1841 = 1270,1290,1310,1330nm OCM 1842 = 1350,1370,1390,1410nm OCM 1843 = 1470,1490,1510,1530nm OCM 1844 = 1550,1570,1590,1610nm

1 x COM (common) connection = multiplexed I/O

1 x UPG (Upgrade) I/O connection (pass band connection to other OCM 189x modules)

LC/PC connectors SMF (single mode)

Channel Insertion loss: 2.7dB, UPG Insertion loss: 2.7dB

Polarization dependant loss: max 0.2dB

Return Loss: > 45dB

Isolation (to adjacent channel): > 30dB

Directivity > 55dB

Temp. dependant loss: < 0.005dB/°C

Temp. dependant change of wavelength: < 0.003nm/°C

Max. input power: 500mw

Single or full duplex operation

Power None required (passive operation)

Physical Size: 120mm x 100mm x 18mm (4.72" x 3.93" x 0.75")

Weight: 140g (4.9oz)

Model # OCM 1841 - (EAN# 4250479319417)

OCM 1842 - (EAN# 4250479319424) OCM 1843 - (EAN# 4250479319431) OCM 1844 - (EAN# 4250479319448)

Includes Module and transport case

Specifications subject to change

LYNX Technik AG Brunnenweg 3 D-64331 Weiterstadt Germany PH +49 (0) 6150 1817 0 info@lynx-technik.com LYNX Technik Inc 26366 Ruether Ave. Santa Clarita, CA 91350 USA PH+1 (661) 251 8600 infousa@lynx-technik.com LYNX Technik Pte Ltd 19 Burn Road #01-01 Advance Building Singapore, 369974 PH +65 648 1622 infoasia®lynx-technik.com