

Anchored Causal Action-Contrast Transfer for Cross-Network Traffic Signal Control

Author names withheld for review

Abstract

Controllers transferred between traffic networks must rank actions under changes in topology, demand and signal programs. We introduce anchored Causal-Factored Cross-City Model Transfer (CFCMT), a target-offline method that learns matched counterfactual action contrasts. From each restored state, a parent-restricted rigid anchor and an antisymmetric all-pair model predict candidate-relative costs; a seed-blocked target selector freezes their blend before deployment. Target simulator labels make the setting calibration-light rather than zero-shot. Development on 18 SUMO networks from seven city groups reduced leave-one-city-out normalized action regret by 9.84% on an excluded seed, with six of seven groups improving. After method freeze, the untouched-seed regret across two external networks was 0.269, compared with 0.292 for the rigid anchor and 0.310 for a legacy near-target-only comparator. In 56 matched 3,600-s rollouts, CFCMT reduced all-departed waiting by 6.27% relative to a same-information dense residual baseline. A preregistered 64-seed comparison then found a 3.04% Jinan gain on all seed-level city contrasts but a 7.87% Los Angeles regression, rejecting joint two-city source benefit. A post-V91 target-offline selector returned target-only control for Los Angeles and admitted a Hangzhou source component for Jinan before fresh rollouts. On 56 further Jinan seeds, the admitted controller reduced waiting by 4.53% relative to a strict zero-source-row target model (95% paired interval, 4.28–4.79%; 56/56 seeds improved). Pressure policies remained stronger. These results support matched action contrast over dense residual transfer and a protocol-specific V98 controller-pair gain in Jinan. Because the V98 comparator is a lower-capacity zero-source-row target model, that comparison does not isolate source-row contribution or establish universal cross-city benefit or superiority to pressure control.

1 Introduction

Traffic-signal controllers are commonly trained and tested within one fixed network. New random seeds change arrivals, but topology, route choice, phase programs and feature semantics remain largely unchanged. Cross-network deployment changes all of them at once. A policy or world model can therefore fit source transitions while misranking actions in a target network, which is the quantity that ultimately determines control performance.

Two established approaches expose the central trade-off. MaxPressure and phase-pressure controllers use local queue imbalance and transfer without a city-indexed policy, with strong throughput and stability motivation (Varaiya, 2013). Pressure structure also underlies learned controllers including PressLight, FRAP and MPLight (Wei et al., 2019a; Zheng et al., 2019; Chen et al., 2020). These rules are difficult baselines because local pressure is already close to the control sufficient statistic in many signal networks. Conversely, simulator-based offline-to-online reinforcement learning can use source data to correct dynamics mismatch (Niu et al., 2022, 2025), but an unrestricted residual may absorb network identity, demand scale and phase-specific associations that do not survive a city shift.

Prior transfer-oriented signal control spans materially different information budgets. MetaLight adapts a meta-learned initialization with target experience, whereas GESA and X-Light construct scenario-normalized or cross-city representations for policy generalization (Zang et al., 2020; Jiang et al., 2024a,b). CrossLight explicitly combines source-city offline pretraining with target-city online fine-tuning (Sun et al., 2024). Sim-to-real work such as UGAT instead transforms actions to compensate for a simulator dynamics gap (Da et al., 2023). These methods establish that topology normalization, meta-adaptation and dynamics-gap correction are each useful, but their zero-shot, online-interaction and sim-to-real protocols answer different questions. Our setting is target offline adaptation: target interactions are counterfactual simulator labels collected before deployment, and no target closed-loop reward is used for model selection.

Mechanism-factored world models provide an intermediate design. They restrict prediction to stable parent sets and can adapt mechanism state separately, consistent with the modularity motivation of causal transfer (Bengio et al., 2020; Feng et al., 2022; Schölkopf et al., 2021). Our experiments revealed a sharper requirement for traffic control: accurate decomposition of absolute dynamics does not guarantee accurate ordering of feasible phases. The final method therefore retains structural parent restrictions but changes the estimand from next-state prediction to within-state action contrast.

We call the resulting method anchored Causal-Factored Cross-City Model Transfer (CFCMT). At a simulator snapshot, every feasible phase is executed from the same restored state. Candidate cost is expressed relative to one source-selected pressure reference and normalized by the action range of that matched group. A low-capacity rigid anchor estimates candidate-versus-reference cost from declared queue, occupancy, pressure and transition parents. A second model compares every unordered phase pair and is antisymmetrized by construction. The target score is

$$S(s, a) = A(s, a) + \alpha(s)\{P(s, a) - A(s, a)\}, \quad (1)$$

where the interpolation is selected out of fold by holding out one complete target adaptation seed. Constant interpolation permits aggressive correction when it is stable; a local confidence-cap limits how far the pairwise model can perturb the anchor when they disagree.

The information budget is central to the claim. CFCMT is not evaluated as zero-shot transfer in the final external experiment. It uses target-network files, online target state and counterfactual transition labels generated by an uncalibrated target SUMO model. Those labels constitute target offline adaptation even though no target simulator parameter is fitted to field data. The method is therefore calibration-light rather than target-data-free. Adaptation seeds, the offline confirmation seed and closed-loop seeds are disjoint, and the evaluation cache did not exist when the target model and selector were frozen.

The empirical design has five levels. First, 18 source networks from seven city groups support leave-one-city-out development with an excluded evaluation seed. Second, two external city-derived networks, Los Angeles and Jinan, test the frozen procedure using all valid target adaptation groups and a new offline seed. Third, 56 matched 3,600-s closed-loop rollouts compare CFCMT with fixed time, simulator-only model predictive control, a rigid causal anchor, an H2O⁺-style dense residual and two classical pressure policies. All policies share target networks, feasible green phases, demand seeds, signal-transition execution and metric populations. Fourth, a legacy near-target-only model already frozen in the same baseline family is compared with CFCMT on 64 newly generated seeds, four target scenarios and 512 rollouts. This fourth stage directly tests whether the original source-plus-target controller improves both external targets after the target adaptation budget is held fixed. Fifth, a separate post-V91 target-offline selector abstains to exact target-only control for Los Angeles and admits a Hangzhou source component for Jinan before 56 further Jinan seeds are

observed. This conditional experiment is reported separately because it uses a topology-repaired refit and a shared pressure guard absent from the frozen v43 controller. Official RESCO and LibSignal reinforcement learning runs are retained only as native-protocol integration checks because their state, reward, action timing and training budgets are not commensurate with this experiment (Ault and Sharon, 2021; Mei et al., 2024). The study consequently does not present native CrossLight, X-Light or GESA scores as if they were paired baselines; a same-protocol reproduction of those systems remains outside the evidence reported here.

This study makes four contributions. First, it formulates cross-network signal adaptation around matched action contrasts and proves cancellation of action-common domain bias. Second, it combines a parent-restricted anchor with an antisymmetric all-action correction and derives exact ranking and bounded perturbation properties. Third, it implements an auditable seed-blocked selection and full-refit protocol that prevents out-of-fold or evaluation models from entering deployment. Fourth, it separates structured-model gain, controller-pair performance and source-row attribution. CFCMT improves the dense residual, while the fresh V91 comparison reveals a Jinan benefit and Los Angeles negative transfer, rejecting a joint two-city source-benefit claim. The distinct V98 selector subsequently abstains for Los Angeles and reproduces a Jinan-specific controller gain against its declared lower-capacity zero-source-row target model; this comparison does not isolate source-row contribution. Classical pressure control remains the closed-loop ceiling, and a separate 64-seed execution-layer challenge does not close that gap. The contribution is consequently an auditable action-ranking framework and evidence for target-network-dependent controller outcomes, not a claim that complexity or source volume alone should replace a strong traffic-control rule.

2 Results

2.1 A frozen action-contrast transfer protocol

The final experiment evaluates target offline adaptation rather than zero-shot policy transfer. Source counterfactuals and target counterfactuals are both generated from matched restored SUMO states, but target roles are separated by seed (Figure 1). Seeds 5057 and 6067 are the only target adaptation seeds. Seed 8171 is collected after the joint method freeze and is used once for offline action-regret confirmation. Seeds 8081 and 9091 are used only for closed-loop policy rollouts. Out-of-fold models select the blend but are never deployed; after selection, each external city receives one refit on the union of all its valid adaptation groups.

The source bank contains 18 networks in seven city groups: Atlanta, Cologne, Hangzhou, Ingolstadt, New York, two RESCO synthetic grids and Salt Lake City. Together they contain 317 controlled traffic lights and 6,076 non-internal lanes. The external set contains a four-signal Los Angeles corridor and a 12-signal Jinan grid evaluated under three demand files (Figure 2; detailed counts in Table 7). City groups, rather than network files, are the development transfer unit, so another Cologne, Hangzhou or Ingolstadt subnetwork cannot enter the training fold when that city is held out.

2.2 Seed-held-out development selected a non-anchor correction

The method was not accepted because it fit its development seed. Models and the city-level selector were fitted using source seeds 2027 and 3037, then evaluated on seed 4047. In leave-one-city-out evaluation, the rigid anchor had city-macro normalized action regret 0.2414 and the selected anchored model had regret 0.2177, a 9.84% reduction (Table 1). Six of seven held-out city groups improved.

a The transferred object



b Frozen external target-adaptation and deployment protocol

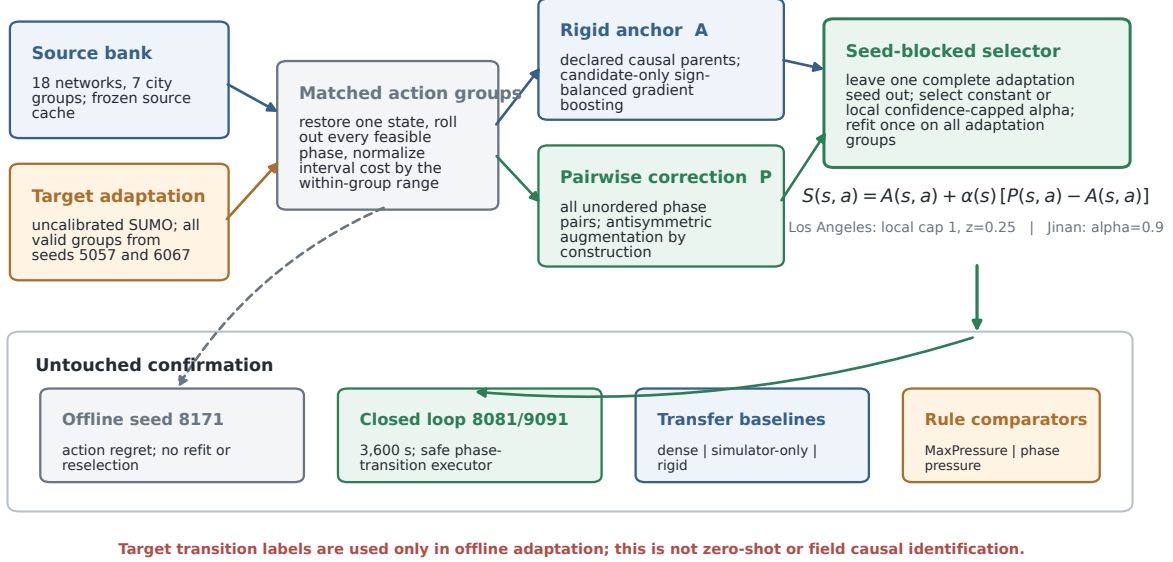


Figure 1: Transferred object and frozen evaluation protocol. **a**, The method lineage contrasts absolute dense-residual prediction, factored MC-WM dynamics and the final matched-ranking estimand. The same-protocol dense baseline in panel **b** is deliberately strengthened with the matched contrast data and target refit budget used by CFCMT. **b**, A rigid parent-restricted anchor and an antisymmetric all-pair correction are combined by a seed-blocked target selector. The pressure reference defines the contrast origin; MaxPressure and phase pressure are independent comparators, not fallback actions. Target counterfactual labels make the final setting target offline adaptation rather than zero-shot transfer.

Table 1: Seed-held-out development confirmation. Regret is candidate cost minus the matched-group optimum, normalized by the within-group action range; lower is better.

Development result	Anchor regret	Selected regret	Relative gain
Seven-city leave-one-city-out	0.241	0.218	9.84%

Hangzhou was the sole regression, with an absolute increase of 0.00388, below the frozen 0.01 tolerance.

Earlier variants failed their gates. A global pairwise correction regressed on the added Salt Lake domain, the first anchored selector exceeded its worst-city tolerance, and a cross-fitted selector did not achieve the required city-level stability. These failures were retained and the successful

Cross-network evidence spans 18 source networks and two external target cities

Blue signals denote source networks; green signals denote the Los Angeles and Jinan confirmation targets.

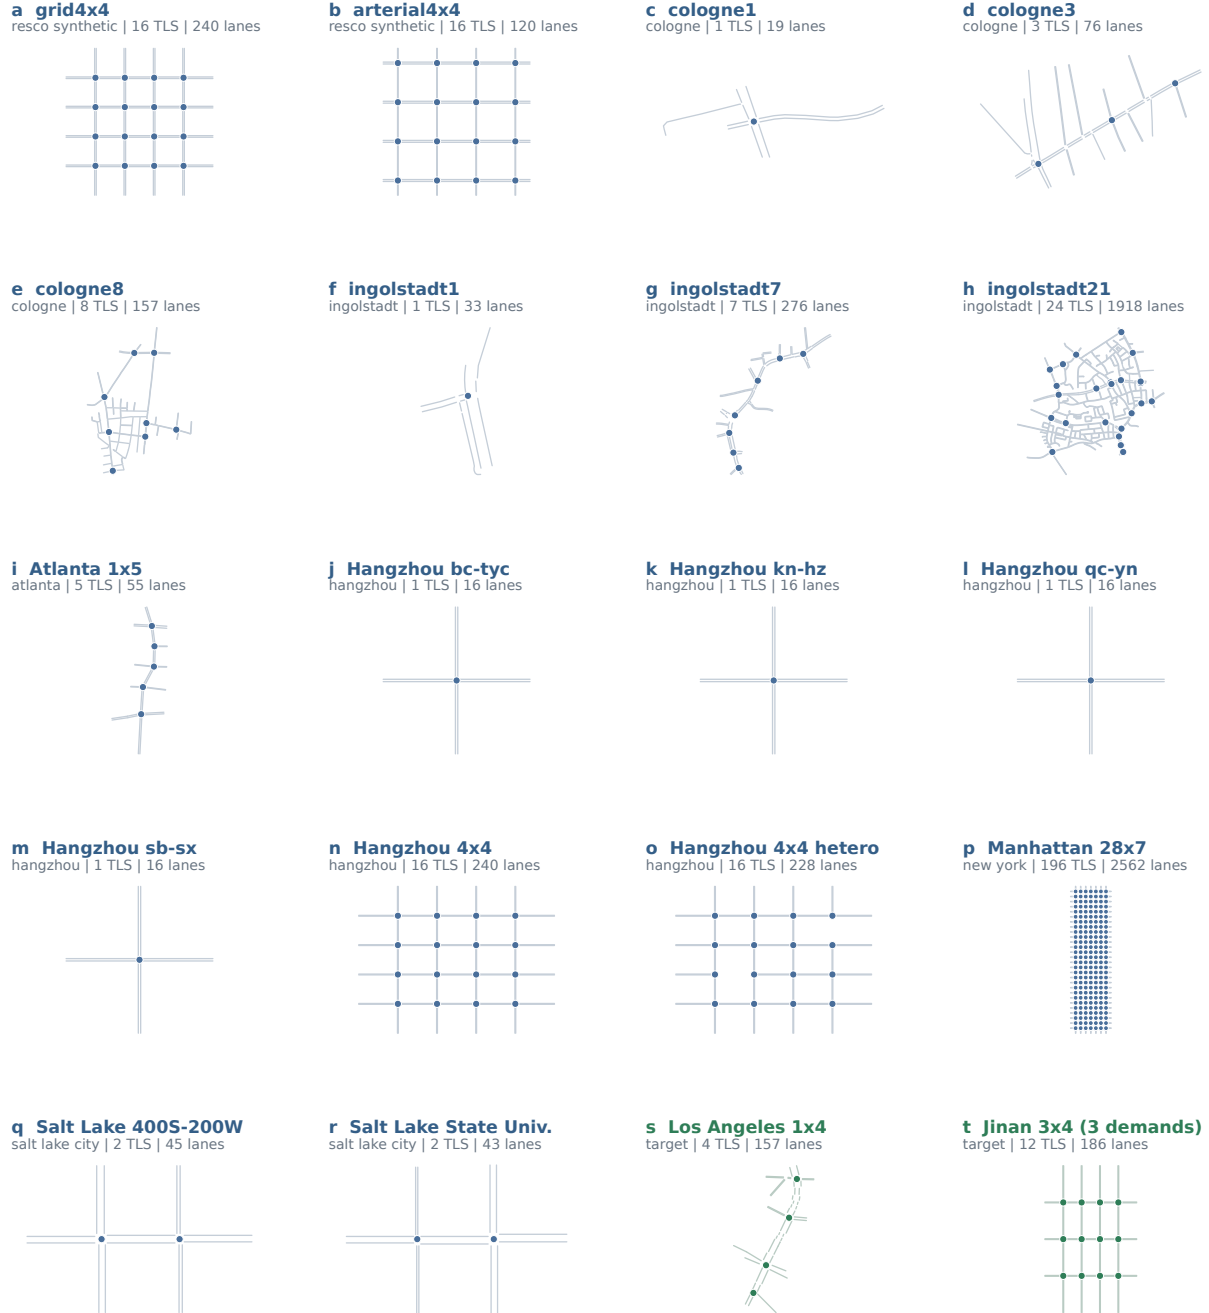


Figure 2: Network shift in development and external confirmation. Lines show non-internal SUMO lanes and points show controlled traffic lights. Blue panels are the 18 source networks grouped into seven development cities; green panels are external target geometries. The Jinan geometry is paired with three demand files. The plate documents topology and action-set variation; it does not imply that the converted networks are calibrated city-wide digital twins.

Table 2: External seed-8171 offline confirmation after city-specific method freeze. The legacy near-target-only arm uses the same causal action-ranking family and target groups with zero deployed source weight in its weighted mean, but retains a source prior for exact ties. Adaptation groups are target counterfactuals from seeds 5057 and 6067; held-out groups are never used for fitting or selection. Gains in the table compare CFCMT with target only.

City	Adapt. groups	Held-out groups	Anchor	Target only	CFCMT	CFCMT vs target only	Selected blend
Los Angeles	165	79	0.148	0.217	0.145	33.24%	local_cap_1.z.op25
Jinan	911	457	0.436	0.404	0.392	2.85%	constant_alpha.op9
External macro	–	2 cities	0.292	0.310	0.269	13.48%	city-specific

seed-held-out protocol was frozen before external labels were generated (Table 8).

2.3 External offline scores favoured source-plus-target fitting

The external selector used every valid adaptation group: 165 in Los Angeles and 911 across the three Jinan demands. Holding out each complete adaptation seed produced two selection folds per city. Los Angeles selected a local blend with disagreement cap 1 and confidence multiplier 0.25; Jinan selected a constant correction weight of 0.9. The deployment artifacts were then refit once on all adaptation groups and frozen before seed 8171 was collected.

On seed 8171, Los Angeles regret decreased from 0.1482 to 0.1450 (2.18%) and optimal-action accuracy increased from 0.785 to 0.810. Jinan regret decreased from 0.4361 to 0.3921 (10.10%) and optimal-action accuracy increased from 0.296 to 0.342 (Table 2 and figure 3a). Equal weighting of the two cities gives a regret reduction from 0.2922 to 0.2685, or 8.09%, and both city point estimates improve.

The freeze also contained a legacy near-target-only comparator from the same causal action-advantage family. It used the same feature semantics and target adaptation groups, and its target prediction weight was numerically one. Source-labelled groups did not enter its deployed weighted mean, although a retained source prior could still resolve exact action ties. Its seed-8171 regret was 0.2172 in Los Angeles and 0.4036 in Jinan. CFCMT therefore reduced the equal-city point estimate from 0.3104 to 0.2685 (13.48%). The paired action-group improvement was 0.07219 in Los Angeles (95% interval [0.01671, 0.13512], two-sided bootstrap probability value 0.011) and 0.01150 in Jinan (interval [−0.02250, 0.04524], probability value 0.5196). Offline The source-aware advantage over this legacy comparator was therefore supported offline in Los Angeles but inconclusive in Jinan, despite both point estimates favouring CFCMT.

The uncertainty differs sharply by city. A 10,000-replicate paired group bootstrap gives a Los Angeles improvement interval of [−0.0675, 0.0729] with a two-sided bootstrap probability value of 0.9396, whereas Jinan gives [0.00469, 0.08293] and 0.0274. The Los Angeles result is therefore directional, not independently conclusive. The external gate is a predeclared engineering confirmation (at least 2% city-macro improvement, both cities improving and no city regression), not a population-level test over cities.

2.4 Closed-loop transfer improved dense residual control

The formal closed-loop matrix contains four target scenarios, two seeds and seven policies, yielding 56 completed 3,600-s rollouts. The primary metric is mean waiting over every departed vehicle. SUMO `write-unfinished` records accrue waiting to the fixed horizon, so unfinished vehicles remain in the population. Completed-only waiting, system vehicle-hours and completion are reported beside

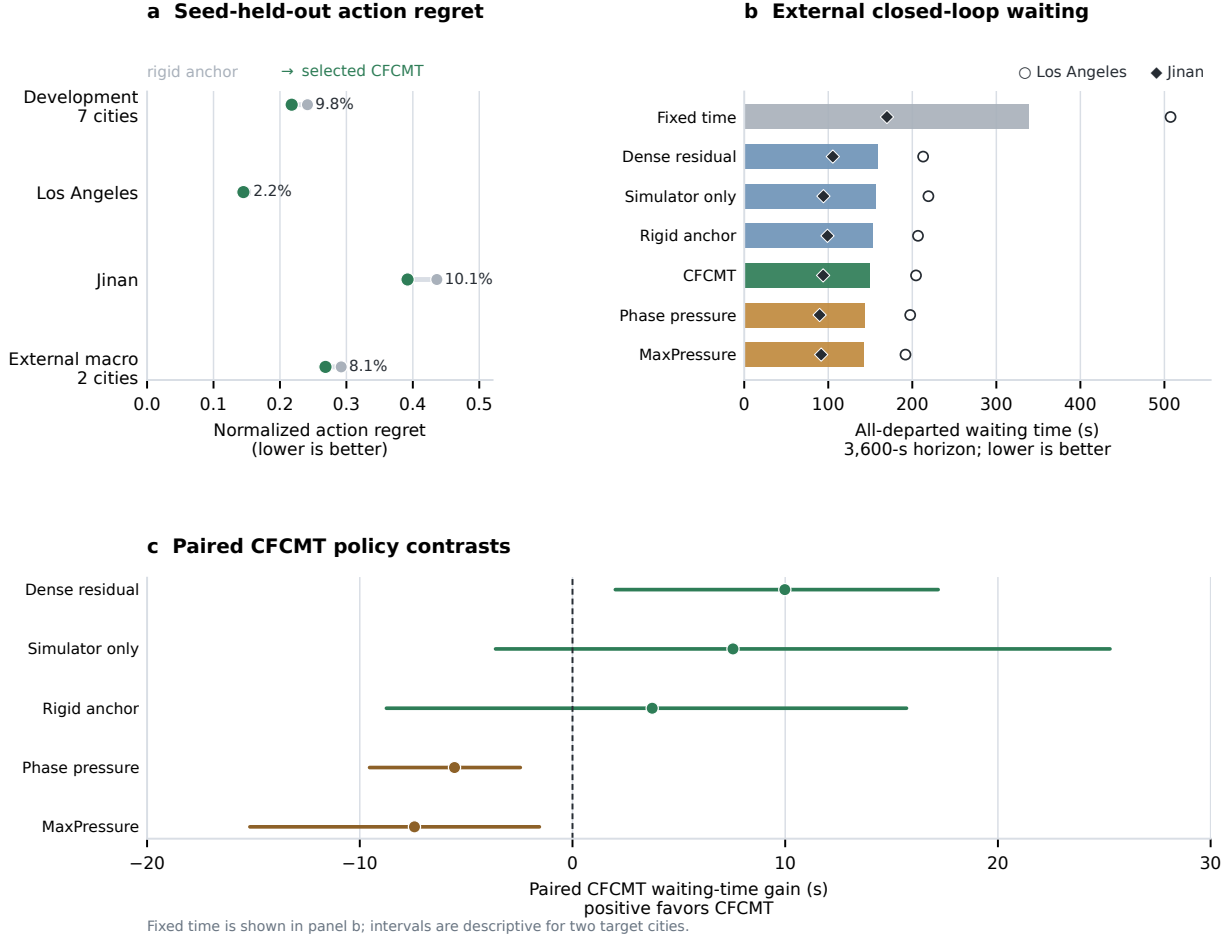


Figure 3: Independent offline and closed-loop confirmation. **a**, seed-held-out normalized action regret for development and external targets. Green points show the selected CFCMT score and grey points the rigid anchor. **b**, all-departed waiting time by policy in Los Angeles (circles) and Jinan (diamonds); bars show the equal-city macro. **c**, paired CFCMT waiting-time gains relative to the non-fixed comparators; fixed time remains visible in panel **b** and Table 3. Positive values favour CFCMT. Intervals are descriptive paired hierarchical bootstrap intervals because there are only two independent target cities.

it to expose censoring and throughput trade-offs.

Anchored CFCMT achieved 149.17 s all-departed waiting, compared with 159.15 s for the H2O⁺-style dense residual, 156.71 s for simulator-only control and 152.91 s for the rigid anchor (Table 3). Relative to the dense residual, the reduction was 9.98 s or 6.27%; both Los Angeles (8.46 s) and Jinan (11.50 s) improved. The descriptive paired hierarchical bootstrap interval was [2.01, 17.19] s and 98.43% of replicates favoured CFCMT. Completed-only waiting was also lower (133.06 versus 147.47 s), system vehicle-hours decreased from 618.15 to 594.14, and completion increased from 0.870 to 0.889.

The point-estimate gains over simulator-only and rigid-anchor control were 7.54 s (4.81%) and 3.75 s (2.45%), respectively, but their intervals crossed zero (Table 4). Thus the closed-loop evidence is strongest against dense residual transfer. Improvement over the anchor is supported clearly by offline action regret and only directionally by these two closed-loop cities; the result does not justify

Table 3: External 3,600-s closed-loop city-macro results. Scenarios are weighted equally within each city and the two cities are weighted equally. Waiting times are seconds; system burden is vehicle-hours. “Incidents” is the equal-city mean of unique SUMO junction-collision incidents.

Policy	All-departed wait	Completed wait	System veh-h	Unfinished	Completion	Incidents
Fixed time	338.58	308.72	885.18	0.133	0.661	2.00
Dense residual	159.15	147.47	618.15	0.066	0.870	0.25
Simulator only	156.71	138.68	619.66	0.069	0.877	0.00
Rigid anchor	152.91	138.40	606.30	0.072	0.882	0.50
Anchored CFCMT	149.17	133.06	594.14	0.067	0.889	0.00
Phase pressure	143.62	125.32	583.05	0.068	0.898	0.25
MaxPressure	141.74	135.42	580.29	0.065	0.896	0.25

Table 4: Paired CFCMT policy contrasts for all-departed waiting. Positive gains favour CFCMT. Intervals are descriptive, not population-level city inference.

Baseline	CFCMT gain (s)	Relative gain	Descriptive 95% interval	LA gain	Jinan gain
Fixed time	189.42	55.94%	[67.11, 308.32]	302.90	75.93
Dense residual	9.98	6.27%	[2.01, 17.19]	8.46	11.50
Simulator only	7.54	4.81%	[-3.62, 25.27]	14.75	0.34
Rigid anchor	3.75	2.45%	[-8.75, 15.70]	2.36	5.14
Phase pressure	-5.55	-3.86%	[-9.54, -2.45]	-6.91	-4.19
MaxPressure	-7.43	-5.24%	[-15.17, -1.56]	-12.53	-2.33

attributing every policy gain to the pairwise correction.

2.5 A fresh near-target-only comparison exposed network-dependent transfer

The seven-policy v43 matrix did not deploy its frozen near-target-only baseline. Its target prediction weight is numerically one, but a retained source prior can resolve exact action ties; it is therefore a legacy near-target-only arm rather than a strict zero-source-row estimator. We first added that comparator to the same eight scenario–seed cells after seeing the main outcomes. This post-hoc v90 ablation left both models unchanged: CFCMT had 149.17 s city-macro waiting and the comparator had 149.04 s, a 0.12-s disadvantage. Los Angeles favoured the comparator by 2.45 s, whereas Jinan favoured CFCMT by 2.20 s. Because the comparator was added after the original result, this matrix is descriptive rather than confirmatory.

We then froze a v91 protocol before generating 64 further simulator seeds, disjoint from all v43, v89 and v90 roles. Each seed paired CFCMT and the legacy comparator on the Los Angeles scenario and all three Jinan demands, giving 256 paired cells and 512 completed rollouts. The primary relative difference averaged scenarios within city, weighted Los Angeles and Jinan equally within seed and then averaged seeds; negative values favour CFCMT.

The comparator achieved 149.09 s and CFCMT 155.14 s. The equal-seed relative difference was +4.254% (paired 95% interval $[-0.775, 13.211]\%$), and only 29/64 seeds improved (one-sided exact sign-test probability 0.809). The city effects had opposite signs: CFCMT improved Jinan by 3.045%, with all 64 seed-level Jinan city contrasts favouring CFCMT, but regressed Los Angeles by 7.865%, where 22/64 seed-level city contrasts improved. The worst seed regressed by 267.56%, collision incidents were 25 for CFCMT and 15 for the comparator, and both had zero teleports. The predeclared mean, interval, both-city, worst-seed, improved-fraction, sign-test and collision gates therefore did not jointly pass, and the fresh source- contribution confirmation was rejected (Table 5).

Table 5: Closed-loop source-contribution ablation. Both policies use identical target adaptation groups, features, action executor and target scenarios. In this legacy comparator, “target only” denotes target weight numerically one, with a retained source prior able to resolve exact ties. Positive Δ denotes higher waiting for CFCMT. V90 is post-hoc; only V91 is a fresh-seed preregistered confirmation. Incident entries are CFCMT/target only.

Evidence	Seeds	Paired cells	Legacy near-target-only wait	CFCMT wait	Δ wait	LA Δ	Jinan Δ	Improved	Incidents C/legacy
V90 post-hoc	2	8	149.04	149.17	+0.082%	+1.212%	-2.292%	7/8	0/1
V91 fresh (rejected)	64	256	149.09	155.14	+4.254%	+7.865%	-3.045%	29/64	25/15

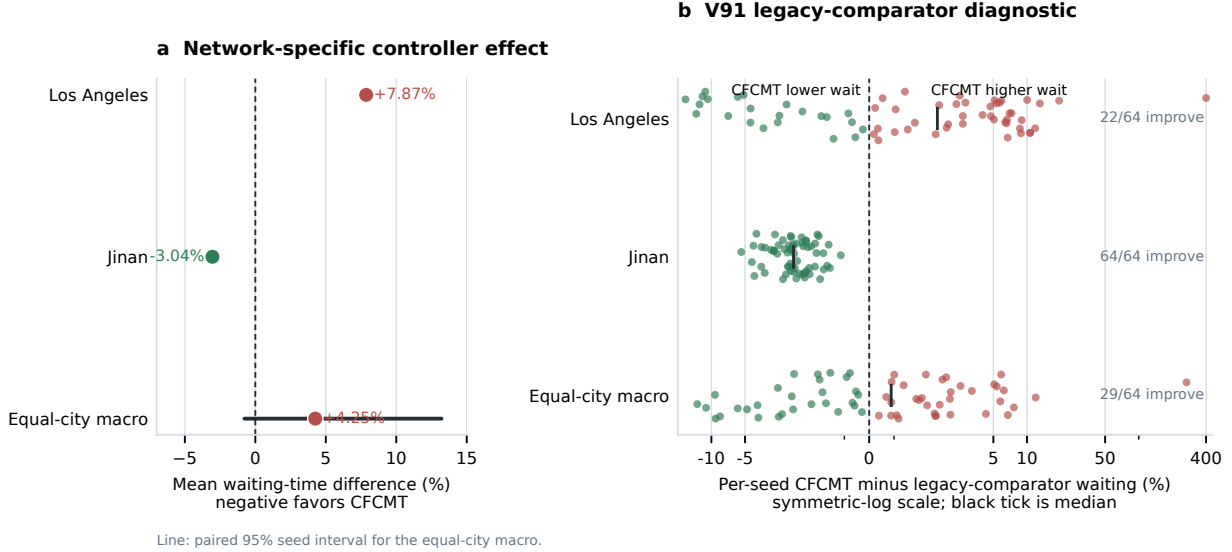


Figure 4: Network dependence in the fresh v91 comparison. **a**, Mean waiting differences for Los Angeles, Jinan and the equal-city primary estimand; negative values favour CFCMT, and the line is the paired 95% interval for the equal-city mean. **b**, Seed-level city and equal-city differences for all 64 fresh seeds. Every Jinan city contrast favours CFCMT, whereas the Los Angeles distribution contains a long harmful tail. The comparator is the frozen legacy near-target-only arm, not a strict zero-source-row estimator.

2.6 A post-V91 selector retained a Jinan-specific controller-pair gain

V98 asks a different question from the frozen v43/v91 experiment. After the v91 outcomes were available, target models were refitted with repaired topology context and separate source-city components. Five scenario-and-seed-blocked folds evaluated seven source groups and source masses in $\{0, 0.25, 0.5, 0.75, 1\}$ using only a balanced B100 target-counterfactual subset. Failure of the offline improvement and fold-stability gates returned the exact target-only model. Before any fresh closed-loop result was observed, the selector returned source mass zero for Los Angeles and selected Hangzhou with source mass one for Jinan.

The selected Jinan controller was then compared with a strict target model fitted with zero source rows on 56 further seeds. Three demand scenarios and two policies produced 336 completed rollouts. Equal-scenario waiting decreased by 4.527% (paired-seed 95% bootstrap interval, 4.279–4.787%); all 56 seeds improved and the two-sided paired Wilcoxon probability was 7.55×10^{-11} (Table 6).

This is a positive controller-pair result under the frozen v98 protocol, not a re-estimate obtained by deleting Los Angeles after evaluation. It is not pooled with v91: v98 uses a post-v91 topology-

Table 6: Jinan-specific controller comparisons under two separate frozen protocols. V91 compares the original v43 controller with its legacy near-target-only arm; V98 compares a post-v91 selected controller with a strict zero-source-row target model of lower capacity. The protocols are not pooled, and the V98 contrast does not isolate source-row contribution.

Experiment	Selection/evaluation	Seeds	Improved	Δ waiting	95% interval	Comparator	Guard
V91 Jinan city diagnostic	frozen two-city protocol; Jinan diagnostic	64	64/64	-3.045%	–	final V43 legacy near-target-only	none in final V43 controller
V98 Jinan controller-pair confirmation	B100 target-offline preselection; fresh Jinan confirmation	56	56/56	-4.527%	[-4.787, -4.279]%	strict zero-source-row lower-capacity target model (causal_target_only_v2)	post-V91 shared inherited Jinan pressure guard (risk_multiplier=0.5)

Negative differences favour the first-listed controller. The V91 row is its Jinan city diagnostic and has no city-specific interval in that audit. V98 compares a preselected controller with its declared lower-capacity zero-source-row target comparator; the two rows are not pooled, and V98 does not isolate source-row contribution.

repaired model and a pressure guard shared by both arms. The result establishes reproducible benefit for the preselected controller relative to its declared comparator. Because that zero-source-row target estimator has lower capacity than the selected controller, the comparison does not isolate source-row contribution or establish superiority over phase pressure.

2.7 Classical pressure remained the performance ceiling

MaxPressure and phase pressure achieved 141.74 and 143.62 s waiting, respectively, outperforming CFCMT by 7.43 and 5.55 s. The direction was the same in both external cities and the descriptive intervals excluded zero. Their system vehicle-hours and completion ratios were also better than CFCMT. This is a substantive boundary, not an implementation detail: the final CFCMT controller does not fall back to either rule. The pressure action used to construct a contrast is merely the zero point of a learned ranking, and any feasible phase can be selected at deployment.

All 56 rollouts completed with zero teleports. Across all policies there were 171 raw collision events consolidated into 13 unique junction incidents in six rollouts. CFCMT had zero incidents and never recorded more incidents than its paired comparator. Because incidents are simulator events and the matrix contains only eight CFCMT rollouts, this audit is a validity and failure report rather than a safety-certification claim.

2.8 A fresh-seed successor stress test did not close the pressure gap

After v43 was frozen, we separately tested whether a longer-horizon latent originator and a globally rate-limited executor could turn the pointwise ranking model into a controller that exceeded phase pressure. This successor track is not the anchored all-pair v43 controller and is not pooled with its two-city result. It uses a target-state-conditioned 120-s action originator, one permitted network-wide override at a time and a 120-s global switch cooldown on the Jinan target.

The legacy global executor appeared favourable on 54 disclosed adaptive seeds (-0.429% mean relative waiting difference; paired 95% interval $[-0.818, -0.033]\%$). Allowing unlimited cooldown stays instead regressed by 0.104% , and a one-stay budget produced an inconclusive -0.242% point estimate; both variants were rejected. We therefore froze the unchanged legacy executor before generating 64 new seeds disjoint from all adaptive seeds and from eight still-sealed prospective seeds.

On those 64 fresh seeds, the method-phase-pressure difference shrank to -0.043% (paired 95% interval $[-0.449, 0.370]\%$). The method improved 34/64 seeds, the one-sided exact sign-test probability was 0.354 and the worst seed regressed by 5.21%, just beyond the preregistered 5%

limit. Teleports were 0/0 and collision incidents 1/1, but the bootstrap, sign-test and worst-seed gates failed. The joint confirmation was therefore rejected (Table 14). This untouched-seed result supports neither same-network superiority over phase pressure nor a cross-network claim for the successor executor.

2.9 Native reinforcement-learning results are protocol checks

Official RESCO and patched LibSignal experiments confirm that standard RL baselines can be executed in the project. The RESCO adapter completed 42 supported full-budget runs, and the LibSignal adapter completed 36 runs across DQN, PressLight, FRAP and MPLight. They use their native observations, rewards, action intervals, training loops and metrics, and therefore cannot be inserted into the 56-rollout table as if they were paired policy rows. Their results and upstream exclusions are reported in Tables 15 and 16; the same-protocol conclusion is based only on the external CFCMT matrix above.

3 Discussion

One supported result is about model structure: aligning the estimand and capacity with the decision improved a learned controller relative to a dense residual. CFCMT predicts a normalized ordering among phases from the same state, keeps a rigid local anchor and allows an all-pair correction only at a weight selected on complete held-out target seeds. This reduced external offline regret and closed-loop waiting relative to a same-information dense residual. Because the dense comparison also receives matched action contrasts, the gain cannot be explained by reference subtraction alone.

A distinct claim about transferred data is conditional rather than uniformly positive or negative. The v91 comparator shares the target labels, feature semantics, model family and executor with CFCMT, and assigns source-labelled samples zero weight in deployed scoring. However, its retained source prior can resolve exact prediction ties, so it is a legacy near-target-only comparator rather than a strict source-free arm. Across 64 fresh closed-loop seeds, CFCMT reduced Jinan waiting by 3.045%, with all 64 seed-level city contrasts favourable, but increased Los Angeles waiting by 7.865%, with only 22 of 64 contrasts favourable. The equal-city mean therefore rejected a general cross-city source-contribution claim and exposed negative transfer as a network-dependent failure mode.

A separate post-v91 target-offline selector then made the network dependence operational before its fresh rollouts: it returned exact target-only control for Los Angeles and admitted a Hangzhou source component at mass one for Jinan. On 56 further Jinan seeds (336 rollouts), the admitted controller reduced waiting by 4.527% relative to a strict zero-source-row target model (paired 95% interval, 4.279–4.787%); all 56 contrasts were favourable ($p = 7.5475 \times 10^{-11}$, Wilcoxon signed-rank test). Because the abstention and admission decisions preceded these rollouts, this is evidence for a preselected Jinan controller-pair gain rather than a post-hoc deletion of Los Angeles. The comparison still does not isolate source rows at fixed architecture: the strict target comparator has lower capacity, and both arms use the same risk multiplier of 0.5 inherited from earlier Jinan closed-loop development. It also does not establish superiority over phase pressure.

The experiments also explain why the earlier full mechanism-world-model route was not retained as the final controller. MC-WM decomposed queue propagation, red accumulation, mobility, spillback and control cost. That decomposition is useful for diagnosis, but each auxiliary prediction introduces error before the model answers the narrower control question. Good next-state or mechanism loss does not guarantee the correct phase ordering, and flexible latent or graph paths can dominate the rigid signal under limited target support. The final method is therefore a reverse design from

the successful rigid model: preserve declared parents and local mechanism features, then add only an antisymmetric ranking correction whose effect is measurable and bounded. This is a change in scientific hypothesis, not a residual patch to rescue a predetermined “full” architecture.

Pressure control remains the operational reference. MaxPressure and phase pressure were better than CFCMT in both external cities, with lower system vehicle-hours and slightly higher completion. Traffic-signal control has a strong local-rule ceiling because queue pressure directly reflects service imbalance. A learned method that beats fixed time or a dense neural baseline but not pressure control is not a replacement controller. CFCMT is better positioned as a transfer layer for settings where the decision depends on effects absent from a pressure score, or as a structured model used alongside rather than rhetorically above a rule. The discarded pressure-guard experiments in the supplement reinforce this point, but pressure is not hidden inside the final v43 policy.

The absence of same-protocol CrossLight, X-Light, MetaLight and GESA reproductions is also a substantive comparison gap, not merely a citation issue. Their published protocols use different target interaction budgets, state and action interfaces, simulators and training objectives. Reporting their native numbers beside the paired SUMO matrix would manufacture a ranking rather than estimate one. A broader benchmark should reimplement each method behind the same safe phase executor and expose three separate target budgets: zero labels, passive target transitions and matched counterfactual target actions.

Target information changes the interpretation. The target simulator is uncalibrated against field trajectories, which reduces calibration effort, but its action outcomes are labelled target data. The external result is thus a few-shot/full-budget offline-adaptation result with 165 and 911 groups, not a demonstration that a source-city policy can be deployed without target transitions. A genuine zero-shot arm remains scientifically useful as the left endpoint of an information curve, but it is not the basis of the present closed-loop claim. Conversely, field loop-detector or trajectory data could adapt passive state representations without supplying the counterfactual outcome of an unexecuted phase.

The source-comparison results also change how the adaptation budget should be used. More source data is not monotonically beneficial after target labels are available. Initial target-seed-blocked gates either retained city regressions or removed them by selecting target only in all seven development cities (Supplementary Table 10). A subsequent remedy ladder tested mechanism-specific priors, inverse-budget shrinkage, local right-of-way context, state-conditioned downstream utility, leave-city-out meta-utility and source-only or target-calibrated hierarchical priors (Supplementary Table 11). Forced source arms still showed useful headroom, including improvement in five of seven city means for the final target-calibrated prior, but its city interval crossed zero and no source survived the complete source-identity controls. The only state-level utility gate that passed offline development produced a large Cologne closed-loop regression before matrix expansion. These experiments validate exact abstention as a fallback and expose source-benefit identification as the unresolved multicity problem; they do not extend the separate Jinan-specific v98 result into a general deployable selector.

Several limitations constrain generalization. First, the formal external unit count is two cities. Multiple Jinan demand files improve within-city coverage but do not create independent cities, so all intervals are explicitly descriptive. Second, the Los Angeles and Jinan scenarios are CityFlow-derived networks converted and semantically audited for SUMO; they are not calibrated city-wide digital twins. Third, training counterfactuals share the same SUMO physics family as evaluation. Cross-network transfer is real at the topology, demand and phase-program levels, but sim-to-real transfer is not tested. Fourth, the seven-policy closed-loop matrix uses two seeds, whereas v91 uses 64 seeds over the same two target geometries and v98 uses 56 further seeds on Jinan only. These protocols are reported separately rather than pooled. All use a fixed 3,600-s horizon. Unfinished

vehicles are included, yet longer incidents, non-recurrent demand and detector failure remain outside the experiment.

The sequential development record is another limitation and a strength. A diagnostic external seed exposed a one-city regression and motivated removal of an arbitrary adaptation cap and stricter complete-seed cross-fitting. That diagnostic seed was then permanently excluded, and a new seed authorized the final test. This is not equivalent to a single untouched preregistration; reporting the failed stages is necessary to expose researcher degrees of freedom. The final v43 cache, selectors, deployment models and closed-loop matrix are nevertheless hash-linked and frozen before their respective next stage.

A later execution-layer programme provides a stronger check on this boundary. Its favourable 54-seed adaptive estimate shrank almost to zero on 64 newly generated Jinan seeds and failed the preregistered bootstrap, sign-test and worst-seed criteria. Because that programme used a different 120-s latent originator and global cooldown, it neither rescues nor invalidates the v43 anchored all-pair comparison. It does show why adaptive search and independent confirmation must not be pooled, and why the present evidence cannot support learned-policy superiority over phase pressure.

The fresh v91 near-target-only test more directly rejects a uniform cross-city source-benefit claim. Unlike the execution-layer programme, it holds the CFCMT model family, target adaptation budget and executor fixed. Its retained source-prior tie-break prevents a strict source-row causal interpretation, but the opposite city effects cannot be dismissed as a different policy class. Offline regret and short-horizon action ranking did not reliably predict the closed-loop value of source data, particularly in the Los Angeles corridor where one seed produced a large congestion cascade.

The post-v91 evidence narrows but does not close that attribution gap. V98 shows that a frozen target-offline rule can abstain for Los Angeles and retain a repeatable Jinan-specific controller gain against its declared lower-capacity zero-source-row target model. The development-only v123/v157a analysis reported favourable model-path differences at five target-label budgets, but the target and source paths used different Jinan domain handling. These historical contrasts therefore do not isolate source-row value. V157B corrected the comparator at B100 only: on the reused 22-seed Jinan selector, source minus target was -0.01357 (paired 95% interval $[-0.01784, -0.00935]$), with 20/22 seeds improving. The source arm still cost $+0.02534$ relative to phase pressure. V157C then ran the fixed three-seed Jinan native one-action protocol. Seeds 80314 and 88625 completed, but seed 27178 remained invalid because its fixed 480-s checkpoint had no eligible, scorable traffic light; the seed was neither dropped nor replaced. Across the two valid seeds, the descriptive source-minus-target mean was $+0.00236$ (one of two seeds improved), source minus matched placebo was -0.00232 , target minus PhasePressure was $+0.00125$, and source minus PhasePressure was $+0.00362$, with source worse in both seeds. Recorded collision counts were zero. PhasePressure is the reference heuristic, not a learned arm. Because the fixed roster was incomplete, these values do not support a three-seed inference or confirm the reused-selector advantage. Moreover, only two of five effective source overrides improved their native PhasePressure continuation, and the predicted source-target ordering agreed with the native outcome in only one of four different-action windows. The limitation therefore extends beyond the missing seed to action-benefit ranking on native continuations. V158 made one final frozen attempt to address that ranking mismatch. It collected 100 native-prefix action groups from ten fixed Jinan development seeds and fitted native residual calibrators in five whole-seed folds. Source minus target was -0.00113 (paired 95% interval $[-0.00240, +0.00019]$; 6/10 seeds improved), source minus matched placebo was -0.00072 ($[-0.00219, +0.00091]$; 7/10), and source minus PhasePressure was $+0.00014$ ($[-0.00239, +0.00261]$; 5/10). All three preregistered OOF comparisons failed, so the reserve was withheld. This result authorizes no controller adoption, unseen-city claim or post-hoc retuning; it closes the native-prefix ranking-remediation route under the frozen Jinan sparse controller. No single experiment therefore combines fixed architecture, strict

source removal, fresh multicity closed-loop confirmation and pressure-policy superiority.

Any future study would require a new precommitted design and independent city units rather than a relaxed threshold or another sweep on the V158 outcomes. It would need to freeze the link between compatibility and downstream action ranking before evaluation on additional external cities and a calibrated digital twin or prospective signal intervention. Such a study could test whether the local pairwise advantage survives simulator mismatch and whether source mechanisms add value in objectives where pressure is incomplete, including multimodal priority, spillback risk, emissions or network-level coordination. Until then, the supported claim is narrower: causal parent restrictions and antisymmetric action ranking improve a simulation-assisted residual relative to dense modelling, while a predeployment rule retained a Jinan-specific controller-pair gain that does not isolate source-row contribution. Classical pressure remains the stronger controller on the reported targets.

4 Methods

4.1 Problem definition and information budget

Let c denote a city group, n a network, s_g a complete simulator state at matched action group g , and $\mathcal{A}_g$ the feasible green stages of the focal signal. A safe phase executor constructs this set from the original SUMO `tlLogic` and enforces minimum green, yellow and all-red transitions. The learner requests a feasible stage; it never writes an arbitrary signal string.

The final external setting is target offline adaptation. Available information comprises (i) a frozen source counterfactual bank, (ii) target network, demand and signal files, (iii) target counterfactual action groups from an uncalibrated SUMO model, and (iv) target state observed during deployment. No simulator parameter is calibrated against target field data, but item (iii) contains labelled target transitions. We therefore do not call the experiment zero-shot. Passive traffic observations without action outcomes would define a different, weaker information regime that is not used for the final policy result.

4.2 Matched counterfactual action groups

After a 60-s warm-up, the complete SUMO simulation and all signal-executor states are snapshotted. For every focal action $a \in \mathcal{A}_g$, the state is restored exactly, a is applied for one 10-s control interval, and the branch continues under phase pressure for five additional intervals. All other signals use phase pressure throughout the branch. The 60-s outcome is

$$Y_g(a) = \frac{1}{H} \sum_{\tau=1}^H \frac{N_{\text{active}}(\tau) + N_{\text{pending}}(\tau)}{L_n}, \quad H = 60 \text{ s}, \quad (2)$$

where L_n is the number of controlled lanes. Pending vehicles are included so a phase is not rewarded for delaying insertion. The branch collector uses `libsumo`, checks replay determinism, fails on teleports, and censors an entire matched group when any branch has a junction collision. Group-level censoring prevents action-selective support from being retained.

A generalized pressure policy π_r , selected using source-only closed-loop cost, supplies one reference action $r_g = \pi_r(s_g)$. For the frozen external models its specification is `gp_d0_o0p02_s0`.

Define

$$\sigma_g = \max \left\{ \max_a Y_g(a) - \min_a Y_g(a), \epsilon_g \right\}, \quad (3)$$

$$z_g(a) = \frac{Y_g(a) - Y_g(r_g)}{\sigma_g}, \quad (4)$$

where ϵ_g is the numerical absolute/relative floor used by the implementation. The reference has $z_g(r_g) = 0$. Evaluation uses normalized action regret

$$\text{Reg}_g(\hat{a}) = \frac{Y_g(\hat{a}) - \min_{a \in \mathcal{A}_g} Y_g(a)}{\sigma_g}. \quad (5)$$

Assumption 1: action-common domain error. At one restored state, an absolute simulator or domain discrepancy can be written as

$$Y_g(a) = b_g + q_g(a) + e_g(a), \quad (6)$$

where b_g is independent of the candidate action. The remainder $e_g(a)$ may still be action dependent.

Proposition 1: exact cancellation. For any a , $Y_g(a) - Y_g(r_g) = q_g(a) - q_g(r_g) + e_g(a) - e_g(r_g)$; hence b_g cancels exactly. More generally, adding any state-specific constant to every candidate outcome leaves both Equation (4) and the action ordering unchanged.

This proposition motivates the estimand but does not remove action-dependent simulator error. Exact state restoration is therefore a protocol requirement, not merely a variance-reduction device.

4.3 Parent-restricted rigid anchor

The anchor $A_\theta(s_g, a)$ directly regresses $z_g(a)$ for non-reference candidates and assigns zero to the reference. Its 29 declared parents contain local total queue, vehicle count, speed and occupancy; candidate and reference green/red queue; downstream queue and occupancy; service and red pressure; switch and clearance indicators; and current-phase overlap. City identifiers, static target context and unrestricted graph embeddings are excluded from the direct predictor. These parents encode a modelling hypothesis about local action mechanisms; they were specified by design and were not discovered from field observational data.

The estimator is a **HistGradientBoostingRegressor** with 100 boosting iterations, at most 15 leaves, minimum leaf size 12 and L_2 regularization 10. Each city domain receives equal total weight, each matched action group receives equal weight within a domain, and negative versus non-negative candidate contrasts are reweighted to avoid the dominant sign determining the fit. Targets are normalized independently by σ_g . The 90th percentile absolute residual on source leave-one-domain predictions supplies the anchor uncertainty scale u_A .

4.4 Antisymmetric all-action correction

The correction model uses every unordered pair $\{a_i, a_j\} \subset \mathcal{A}_g$. Let x_g contain 23 action-common state parents and $\phi_g(a)$ contain 40 phase-local action parents. The training design and target are

$$d_{gij} = [x_g, \phi_g(a_i) - \phi_g(a_j)], \quad t_{gij} = \frac{Y_g(a_i) - Y_g(a_j)}{\sigma_g}. \quad (7)$$

Every row (d_{gij}, t_{gij}) is augmented by its reverse $(d_{gji}, -t_{gij})$. At prediction, the regressor f_ψ is explicitly antisymmetrized,

$$\hat{q}_{ij} = \frac{1}{2} [f_\psi(x_g, \phi_i - \phi_j) - f_\psi(x_g, \phi_j - \phi_i)], \quad (8)$$

and converted to an action score

$$P_\psi(s_g, a_i) = \frac{1}{K_g - 1} \sum_{j \neq i} \hat{q}_{ij}, \quad K_g = |\mathcal{A}_g|. \quad (9)$$

The group is finally shifted so the reference score is zero. Pair-cycle inconsistency augments the 90th-percentile residual uncertainty u_P .

Proposition 2: antisymmetry and ranking recovery. Equation (8) gives $\hat{q}_{ji} = -\hat{q}_{ij}$ by construction. If $\hat{q}_{ij} = z_g(a_i) - z_g(a_j)$ for all pairs, then

$$P_\psi(s_g, a_i) = \frac{K_g}{K_g - 1} [z_g(a_i) - \bar{z}_g]. \quad (10)$$

The positive scale and subsequent reference shift preserve $\arg \min_a z_g(a)$. Thus an exact pairwise model recovers the optimal action without estimating an absolute state outcome.

The pairwise model uses the same gradient-boosting family as the anchor. Its state parents include local aggregate state, time, queue concentration and signal-graph neighbourhood summaries; its action parents include phase duration, queue, occupancy, downstream load, service pressure, transition and graph-action summaries. Context values are used only to calibrate support and uncertainty, not as direct prediction features.

4.5 Anchored interpolation and local cap

For one action group, the deployed score is

$$S_\alpha(s_g, a) = (1 - \alpha_g)A_\theta(s_g, a) + \alpha_g P_\psi(s_g, a), \quad 0 \leq \alpha_g \leq 1. \quad (11)$$

Candidate selectors include constant weights $\alpha \in \{0, 0.1, \dots, 1\}$ and local confidence-capped weights. For the local form, let

$$h_g = \max\{\text{range}(A_g), \text{median}(u_{A,g}), 10^{-6}\}, \quad (12)$$

$$D_g = \text{range}(P_g - A_g)/h_g, \quad (13)$$

$$M_g = \max\{P_g(a_A) - P_g(a_P), 0\}/h_g, \quad (14)$$

$$U_g = \{u_P(a_A) + u_P(a_P)\}/h_g, \quad (15)$$

where $a_A = \arg \min A_g$ and $a_P = \arg \min P_g$. With cap c and confidence multiplier ζ ,

$$\alpha_g = \min\{1, c/\max(D_g, 10^{-12})\} \mathbb{I}[M_g \geq \zeta U_g]. \quad (16)$$

Proposition 3: blend and decision-error bounds. For a group-constant α_g , if $\|A_g - z_g\|_\infty \leq \varepsilon_A$ and $\|P_g - z_g\|_\infty \leq \varepsilon_P$, then

$$\|S_\alpha - z_g\|_\infty \leq (1 - \alpha_g)\varepsilon_A + \alpha_g\varepsilon_P. \quad (17)$$

For $\hat{a} = \arg \min_a S_\alpha(a)$ and $a^* = \arg \min_a z_g(a)$,

$$z_g(\hat{a}) - z_g(a^*) \leq 2\|S_\alpha - z_g\|_\infty. \quad (18)$$

The first inequality follows from convexity of the sup norm; the second follows by adding and subtracting $S_\alpha(\hat{a})$ and $S_\alpha(a^*)$ and using the minimizing property of $\hat{a}$. These are deterministic conditional bounds, not guarantees that either fitted error is small in a new city.

Corollary 1: bounded local perturbation. Whenever the confidence indicator in Equation (16) passes,

$$\text{range}(S_\alpha - A) = \alpha_g \text{range}(P - A) \leq ch_g. \quad (19)$$

When it fails, $S_\alpha = A$. The local rule therefore bounds score perturbation relative to the anchor, but it is not a queue-stability or safety guarantee.

4.6 Seed-blocked target selection and full refit

For each external city, all valid groups from adaptation seeds 5057 and 6067 are retained. In fold one, the source bank plus target seed 5057 fits both models and seed 6067 scores every candidate α ; fold two reverses the target seeds. A candidate must be non-worse than the anchor in mean out-of-fold regret and may regress by at most 0.1 in either complete-seed fold. Among admissible candidates, the selector minimizes mean out-of-fold regret with deterministic tie breaking. Los Angeles selects $(c, \zeta) = (1, 0.25)$ and Jinan selects constant $\alpha = 0.9$.

After the choice is frozen, the model is fitted once on the source bank plus all target adaptation groups: 165 groups for Los Angeles and 911 for Jinan. The out-of-fold models are discarded. Method and learned baselines share the same target group identifiers and full-refit call. Model serialization is round-tripped before authorization. The seed-8171 evaluation cache is required to be absent at the joint freeze and the diagnostic-only seed 7079 is permanently excluded from v43 selection and confirmation.

4.7 Closed-loop controller and comparators

At each 10-s decision time, the runtime constructs every currently feasible phase, evaluates the frozen 60-s action score and requests the phase with minimum raw contrast. The safe executor handles physical transition timing. No uncertainty guard, pressure fallback or target closed-loop tuning is active in the final v43 policy. The pressure reference is recomputed only to create the zero coordinate required by the contrast model.

The same-protocol comparators are fixed time, MaxPressure, phase pressure, simulator-only contrast MPC, the rigid anchor alone and a dense residual. The dense baseline receives the same matched action-contrast data and refit budget but allows unrestricted feature/context mixing in a dense residual world model. It is labelled H2O⁺-style because it instantiates the simulator-plus-learned-residual principle; it is not claimed to reproduce the original H2O⁺ algorithm, optimizer or online training loop. This contrast-aligned baseline makes the comparison conservative: the CFCMT advantage cannot be attributed solely to subtracting the reference action.

Official RESCO and LibSignal controllers retain their upstream state, reward, timing and training definitions. They are native-protocol execution audits, not paired estimates of the CFCMT treatment contrast.

4.8 Legacy near-target-only source-contribution test

The original source contribution is compared with the pre-existing `causal_target_only` model family. This comparator has the same causal action-advantage features, target domain and target adaptation groups as the corresponding baseline artifact. It sets prior group strength to zero and the maximum target weight to one. Both external artifacts had more than four target groups and selected target weights numerically equal to one. A source submodel is still fitted and retained; its coefficient in the deployed mean, uncertainty and trust predictions is zero, but its prior can resolve

exact action ties. We therefore retain this frozen arm as a legacy near-target-only comparator rather than describing it as a strict zero-source-row estimator.

The first deployment of this frozen comparator, v90, reused the eight v43 scenario-seed cells and was specified only after the original seven-policy outcomes were known. It is labelled post-hoc. The subsequent v91 protocol was written before any v91 outcome and did not refit either model. A deterministic generator produced 64 seeds disjoint from every seed-valued field in v43 and v89 and from the two v90 closed-loop seeds. Four scenarios and two policies gave 512 required rollout identities, all of which completed.

For policy π , city c , scenario set $\mathcal{Q}_c$ and seed s , we first compute

$$\bar{W}_{c,s}^\pi = |\mathcal{Q}_c|^{-1} \sum_{q \in \mathcal{Q}_c} W_{c,q,s}^\pi, \quad \bar{W}_s^\pi = \frac{1}{2} \sum_c \bar{W}_{c,s}^\pi. \quad (20)$$

The paired seed statistic is

$$d_s = \frac{\bar{W}_s^{\text{CFCMT}} - \bar{W}_s^{\text{target}}}{\bar{W}_s^{\text{target}}}, \quad (21)$$

where negative values favour CFCMT. The primary estimate is the mean of d_s over 64 seeds, with 20,000 paired-seed bootstrap replicates. The predeclared joint gate required a non-positive mean and interval upper bound, non-positive means in both cities, at most 5% worst-seed regression, at least 50% improved seeds, one-sided exact sign-test $p \leq 0.05$, no excess teleports or collision incidents, all identities and no failed-seed exclusion. Failure of any component rejects the source-contribution confirmation.

4.9 Post-V91 target-offline conditional source selection

V98 is a separate post-v91 successor and is not part of the frozen v43 method. Target models were refitted after repairing topology context, with one candidate component for each of seven source-city groups. Five scenario-and-seed-blocked folds evaluated source masses $\{0, 0.25, 0.5, 0.75, 1\}$ on a balanced B100 subset of target counterfactual groups. A source component was admitted only when its mean normalized-regret improvement exceeded 0.5%, its one-sided 95% upper confidence bound was below zero and its worst fold regressed by less than 1%. Failure of any gate selected the exact target-only model. This rule returned source mass zero for Los Angeles and Hangzhou source mass one for Jinan before the fresh confirmation rollouts were observed.

The strict comparator uses the corrected `causal_target_only_v2` estimator and fits target rows only. The fresh Jinan confirmation used 56 deterministic PCG64 seeds excluded from v93 and the earlier v98 confirmation. Three demand scenarios and two policies gave 336 completed rollouts. Waiting was averaged equally across the three scenarios within each seed; uncertainty used a paired-seed bootstrap, and the paired Wilcoxon statistic was computed over the 56 seed means.

The selector itself reads no target closed-loop outcome. The complete v98 protocol is nevertheless not target-closed-loop-free: both Jinan arms share a pressure-guard risk multiplier of 0.5 inherited from earlier Jinan closed-loop development. Moreover, the strict zero-source-row comparator has lower model capacity than the source-aware estimator. V98 therefore tests the frozen conditional protocol, not architecture-held-fixed causal attribution to source rows.

4.10 Separate post-freeze execution-layer stress test

The v86-v89 track is a distinct successor experiment on `jinan_3x4_real`. Its originator predicts a 120-s target-simulator cost from target-state and action features; the executor permits at most one

network-wide override and requires at least 120 s between effective phase switches. The method was selected only from 54 disclosed adaptive seeds. Unlimited cooldown stays and a one-stay-per-cooldown variant were evaluated on the same adaptive partition and could not replace the legacy executor.

Before any v89 rollout, a deterministic generator selected 64 new seeds after excluding the 54 adaptive seeds and eight separately sealed v85 seeds. Each seed paired the frozen executor with phase pressure under the same target scenario. The preregistered joint rule required non-positive mean relative waiting difference, a non-positive paired-bootstrap 95% upper bound, no more than 5% worst-seed regression, at least 50% improved seeds, one-sided exact sign-test $p \leq 0.05$, at least 75% active seeds, no aggregate excess in teleports or collision incidents, closed phase accounting and all 128 rollout identities. Twenty thousand paired bootstrap replicates were fixed in the protocol. No failed seed was excluded, and v85 remained sealed. This track is reported as a stress test and is not part of v43 method selection.

4.11 Networks, splits and experimental execution

Development uses 18 networks in seven groups. Source model seeds are 2027 and 3037 and the excluded development evaluation seed is 4047. The successful development stage uses up to 100 target-style groups inside each held-out source-city exercise. External confirmation uses one Los Angeles network and one Jinan geometry with three demand files. Jinan scenarios are weighted equally before city aggregation, preventing that city from receiving triple the weight of Los Angeles.

Closed-loop evaluation runs four scenarios, two seeds and seven policies for 56 paired rollouts. Every rollout uses SUMO 1.22.0, `libsumo`, a 60-s warm-up and a 3,600-s measurement horizon. The experiment was parallelized across cluster workers, while numerical libraries were restricted to one thread per process to avoid nested oversubscription. Each rollout records its result and `tripinfo` hashes, source snapshot identity, model identity, SUMO version and metric population.

The fresh source-contribution confirmation uses the same four scenarios, simulator version, warm-up, horizon, action executor and metric implementation. Only the two frozen policies and 64 fresh seeds differ, producing 512 rollouts. Six process-isolated shards ran on six nodes with 22 workers per node. Full rollout records remain on the execution host; six complete shard summaries and the launch and audit manifests are materialized with the manuscript evidence.

4.12 Outcomes, aggregation and uncertainty

The preregistered closed-loop primary is mean vehicle waiting time. The implementation computes it over all departed vehicles, including unfinished `tripinfo` records whose waiting and duration are accrued to the fixed horizon. We additionally report completed-only waiting, system vehicle-hours, unfinished fraction, completion ratio, throughput, mean queue per lane, teleports, emergency stops and junction collisions. This metric bundle guards against a controller appearing good by withholding departures or by benefiting from right censoring.

Scenario-seed results are first averaged within scenario, scenarios are averaged equally within city and the two external cities are averaged equally. All policy contrasts remain paired on city, scenario and seed. Offline uncertainty uses 10,000 paired action-group bootstrap replicates. Closed-loop uncertainty uses 10,000 paired hierarchical replicates that sample city, then scenario, then seed. With only two independent target cities, these intervals describe sensitivity of the observed matrix; they are not estimates of a general population of cities. No multiplicity-adjusted claim or universal city-level significance is made.

The v91 source-contribution interval instead resamples the 64 paired seed statistics in Equation (21) 20,000 times. The exact sign test uses the number of seeds with $d_s < 0$. City-specific relative differences are secondary diagnostics because the independent city count remains two.

Raw SUMO collision events are consolidated by participant, lane and time into unique junction incidents. Teleports are a hard validity failure; collisions are retained as outcomes in closed loop and compared pairwise. A valid matrix requires all 56 authorized records, exact provenance identities, complete population accounting, readable `tripinfo` hashes and zero teleports. The v91 integrity audit analogously requires all 512 frozen identities and retains every seed regardless of performance or incident status.

4.13 Meaning of “causal”

CFCMT uses two causal design commitments: candidate actions are interventions from a common restored simulator state, and direct predictors are restricted to declared local parent sets. Proposition 1 is algebraic under an additive nuisance assumption, and Propositions 2–3 concern score construction. The study does not identify a causal graph from observational traffic, prove that the declared parents are invariant in the field, or estimate effects of signal interventions in Los Angeles or Jinan. “Causal” therefore describes the model and counterfactual simulation design, not field causal identification.

5 Conclusion

Cross-network traffic-signal transfer improved when the learned object was reduced from absolute dynamics to normalized, matched action contrasts. Anchoring a parent-restricted score and correcting it with an antisymmetric all-action model reduced seed-held-out action regret in development and in two external city-derived networks. The same frozen models improved closed-loop waiting time over a dense residual and produced favourable simulator-only and rigid-anchor point estimates, while remaining behind MaxPressure and phase pressure. Crucially, the 64-seed v91 legacy near-target-only comparison rejected a general source-contribution claim: CFCMT reduced Jinan waiting by 3.045% with all 64 seed-level contrasts favourable, but increased Los Angeles waiting by 7.865% with only 22 of 64 contrasts favourable. A separate post-v91 target-offline selector selected exact target-only control for Los Angeles and admitted a Hangzhou source component for Jinan before fresh rollouts. Across 56 further Jinan seeds (336 rollouts), that admitted controller reduced waiting by 4.527% relative to a strict zero-source-row target model (paired 95% interval, 4.279–4.787%), with all 56 contrasts favourable. CFCMT therefore supports an auditable action-contrast architecture and a preselected V98 Jinan controller-pair gain. The latter comparison does not isolate source rows at fixed architecture because its strict target comparator has lower capacity, and both arms share a risk multiplier of 0.5 inherited from earlier Jinan development. A subsequent seven-city remedy ladder confirmed source headroom but found no general deployable selector that passed source-identity and closed-loop non-degradation checks. Establishing broader cross-city source-row benefit will require more independent target cities and either logged interventions, a validated digital twin or prospective field control; the present evidence also does not establish superiority over phase pressure.

6 Data and Code Availability

The source benchmark combines public SUMO/RESCO scenarios (Lopez et al., 2018; Ault and Sharon, 2021) with public traffic-signal benchmark files used by LibSignal (Mei et al., 2024). The external Los Angeles input is the public LibSignal LA_1x4 CityFlow roadnet and flow (Zhang et al., 2019), and the Jinan inputs are the public CoLight Jinan/3_4 roadnet and three published flow files (Wei et al., 2019b). Conversion to SUMO, route conservation, signal-link identity, collision-free admission and exact source hashes are recorded in the v8 conversion manifest.

The manuscript source-data directory contains machine-readable CSV files for every new figure and table, together with a manifest linking the development audit, source and adaptation caches, deployment models, held-out result and closed-loop aggregate by SHA-256. It also contains the source-contribution table generated from the v90 and v91 audits, retaining the final-v43 legacy near-target-only comparator label. A separate controller-comparison table is generated from the V91 and V98 audits; its rows are not pooled. The V98 row compares a preselected controller with a lower-capacity target model fitted with zero source rows and therefore does not isolate source-row contribution. The manifest also links the metadata-only audit that verified all 336 remote v98 result identities without copying raw result files. The seven-city source-gate CSV and LaTeX table are regenerated directly from the frozen v145, v146 and v148 aggregate JSON files; all three decisions remain rejected. The post-v148 source-remedy CSV and table are regenerated from the canonical V150A, V150C, V150I–V150L, V151A–V153A and V156A–V158 result JSON files, plus the V157B bound arm manifest. They preserve the failed source-identity and closed-loop adjudications, mark the V123/V157A all-budget comparison as domain-handling-confounded, and limit the corrected V157B B100 pass to its reused-selector estimand. The V157C incomplete artifact retains seed 27178 as invalid at its fixed 480-s checkpoint and reports the remaining two seeds descriptively, without a three-seed inference. The V158 artifact records the completed ten-seed native-prefix OOF failure: source minus target was -0.00113 (95% interval $[-0.00240, +0.00019]$), source minus placebo was -0.00072 ($[-0.00219, +0.00091]$), and source minus PhasePressure was $+0.00014$ ($[-0.00239, +0.00261]$). Its reserve was not authorized or run, and it supports no controller adoption or unseen-city claim. The 512 full v91 rollout records remain in the execution archive and are represented locally by six complete shard summaries. The current draft makes no claim of a public repository DOI. Before submission, the code snapshot, converted networks, configuration files, model artifacts, aggregate JSON, per-rollout results, `tripinfo` files and figure-generation scripts must be deposited in a persistent public archive subject to the licences of the upstream benchmark files; the DOI should replace this sentence in the accepted manuscript.

A Supplementary Methods and Results

A.1 Network inventory

The external CityFlow files were converted to SUMO and revised through a semantic admission audit. Phase identities use final SUMO connection indices, permissive links remain distinct from protected movements, all routes are contiguous and demand is conserved. A 3,600-s admission run had no teleports or collisions. The admitted conversion tree has SHA-256 4a2e17618c2ac584fc767562f3a7096c95d8f904f03ef6baa9cd5d34d282eadd.

Table 7: Source and external target network inventory parsed from the SUMO `net.xml` files. Jinan uses one geometry and three demand files.

Role	City group	Networks	TLS	Lanes	Scenarios
Source	atlanta	1	5	55	atlanta_1x5
Source	cologne	3	12	252	cologne1, cologne3, cologne8
Source	hangzhou	6	36	532	hangzhou_bc.tyc, hangzhou_kn_hz, hangzhou_qc_yn, hangzhou_sb_sx, hangzhou_4x4, hangzhou_4x4_hetero
Source	ingolstadt	3	32	2227	ingolstadt1, ingolstadt7, ingolstadt21
Source	new_york	1	196	2562	manhattan_28x7
Source	resco_synthetic	2	32	360	grid4x4, arterial4x4
Source	salt_lake_city	2	4	88	saltlake_400s_200w_q1_weekday_peak, saltlake_state_university_q1_weekday_peak
External target	los_angeles	1	4	157	la_1x4
External target	jinan	1	12	186	jinan_3x4 (3 demand files)

Table 8: Complete high-level decision trail for the pairwise method. Positive percentages denote lower normalized action regret than the rigid anchor. Seed 7079 is diagnostic evidence that informed v43 and is not reused as v43 confirmation.

Stage	Independent check	Result	Protocol consequence
v38 global pairwise	Salt Lake, 2 networks	−12.38% vs rigid; FAIL	reject global correction
v39 anchored selector	7-city development	−0.95% macro; FAIL	reject first anchor blend
v40 cross-fitted selector	7-city nested folds	selected anchor; FAIL	add seed-held-out evaluation
v41 seed-held-out	seed 4047, 7 cities	+9.84%, 6/7 improve; PASS	freeze for external diagnosis
v42 external diagnostic	seed 7079, 2 cities	+4.50% macro, 1/2 improve; FAIL	exclude seed; remove B100 cap
v43 external confirmation	seed 8171, 2 cities	+8.09%, 2/2 improve; PASS	authorize closed loop

A.2 Sequential development and confirmation

The v42 failure is retained because its city-macro improvement alone would have looked positive. It failed the predeclared requirement that both external cities improve: Los Angeles regressed by 0.00072 normalized regret. V43 then removed the arbitrary 100-group cap, used every valid adaptation group and cross-fitted by complete adaptation seed. The later seed 8171, rather than 7079, is the formal external confirmation.

A.3 City-resolved closed-loop outcomes

Table 9: External closed-loop outcomes before equal-city aggregation. Waiting is the all-departed 3,600-s metric in seconds. Incident entries are means over the two closed-loop seeds within that city and policy.

Policy	LA wait	Jinan wait	LA completion	Jinan completion	LA incidents	Jinan incidents
Fixed time	507.33	169.84	0.449	0.873	4.00	0.00
Dense residual	212.88	105.41	0.838	0.902	0.50	0.00
Simulator only	219.17	94.26	0.851	0.903	0.00	0.00
Rigid anchor	206.78	99.05	0.862	0.902	1.00	0.00
Anchored CFCMT	204.42	93.91	0.874	0.903	0.00	0.00
Phase pressure	197.51	89.73	0.890	0.905	0.50	0.00
MaxPressure	191.89	91.58	0.888	0.904	0.50	0.00

The CFCMT-versus-dense waiting improvements are 8.46 s in Los Angeles and 11.50 s in Jinan. CFCMT-versus-MaxPressure differences are −12.53 and −2.33 s, where negative values indicate that MaxPressure is better. The opposite directions cannot be hidden by equal-city aggregation.

A.4 Fresh source-contribution diagnostics

The comparator artifacts were created in the v43 baseline freeze, before the original closed-loop outcomes. Their deployed score assigns zero coefficient to source-labelled samples and their selected target weights were within numerical precision of one in both cities. However, a retained source-trained prior can resolve exact prediction ties. We therefore call this the legacy near-target-only comparator rather than a strict zero-source-row arm. V90 added these artifacts to the eight original scenario-seed cells only after the main comparison and is therefore not a confirmation. V91 froze 64 unique seeds before execution, required 512 exact policy identities and completed all of them without seed exclusion.

The largest v91 failure occurred at seed 7417817 in Los Angeles. CFCMT waiting was 975.27 s with completion 0.270, compared with 194.74 s and completion 0.919 for the legacy near-target-only comparator; neither policy teleported or recorded a collision in that cell. This record is retained in the primary estimate. The failure was not solely an outlier artifact: across the 64 Los Angeles cells, the median relative difference was +2.75%, only 22 favoured CFCMT and 21 regressed by more than 5%. Across 192 Jinan scenario-seed cells, 179 favoured CFCMT, and all 64 Jinan seed-level city contrasts favoured CFCMT. The city-mean waiting effects were -3.045% in Jinan and $+7.865\%$ in Los Angeles, where negative values favour CFCMT. These diagnostics explain the opposite city means but do not change the preregistered seed-level analysis.

A.5 Post-v91 V98 controller-pair confirmation

V98 is a separate post-v91 protocol and is not pooled with the v91 estimate. Its target-offline selector returned exact target-only control for Los Angeles and selected a Hangzhou source component at mass one for Jinan before any fresh v98 rollout was opened. Los Angeles was therefore an ex ante abstention, not a city removed after observing the confirmation outcomes. The Jinan matrix used 56 further seeds, three demand files per seed and two controller arms, for 336 rollouts in total. Relative to the strict zero-source-row target model, the admitted controller reduced waiting by 4.527% (paired 95% interval, 4.279–4.787%); all 56 seed-level contrasts were favourable ($p = 7.5475 \times 10^{-11}$, Wilcoxon signed-rank test). The two frozen protocols are juxtaposed, rather than combined, in Table 6.

This confirmation supports a protocol-specific Jinan controller-pair gain. The preselected controller outperformed its declared strict zero-source-row target comparator, but that comparator has lower capacity. V98 therefore does not isolate source-row contribution at fixed architecture. Both arms also share the risk multiplier of 0.5 inherited from earlier Jinan closed-loop development. The result therefore does not establish a general multicity selector or superiority over phase pressure.

A.6 Seven-city source-gate development

Three later source gates were frozen and evaluated on the seven development city groups. The robust-history gate selected a source for six targets, and the action-agreement gate selected a source for all seven; both improved the equal-city mean but failed the target-only safety comparison because their one-sided upper bounds were positive and their largest city regressions exceeded 0.02 normalized regret. A stricter mechanism-compatibility gate used five B20-to-B5 target-label folds to score queue propagation, served movement, red accumulation, spillback and mobility. It admitted no source and returned exact target only in all seven cities (Table 10).

The progression exposes a safety-usefulness trade-off rather than a successful source selector. v145 and v146 retained source signal but allowed harmful city tails. v148 removed those tails only by abstaining everywhere. Its 7/7 advantage over the dense residual is therefore inherited from the

Table 10: Frozen seven-city source-gate development. Negative effects favour the selected gate. “Upper” is the one-sided 95% upper bound versus the architecture-matched target-only causal arm. Dense denotes the pooled H2O⁺-style residual. These are development results, not external confirmation.

Version	Source gate	Source selected	Δ target mean	Upper 95%	Cities improved	Max. reg.	Δ dense mean
v145	Robust history	6/7	-0.0028	+0.0093	4/7	+0.0281	-0.0720
v146	OOF action agreement	7/7	-0.0016	+0.0095	3/7	+0.0262	-0.0708
v148	Mechanism compatibility	0/7	+0.0000	+0.0000	0/7	+0.0000	-0.0691

rigid target-only causal model and cannot be attributed to source-city labels or to a full mechanism world model. No external confirmation of these v145–v148 seven-city gate rules was authorized after their failures.

We subsequently tested the alternative explanations raised by this result without weakening the frozen safety or source-identity criteria (Table 11). Leave-one-seed diagnostics confirmed that beneficial source headroom exists after the fact. Mechanism-block priors, budget-aware shrinkage, local right-of-way context, state-conditioned utility, leave-city-out meta-utility and hierarchical priors nevertheless failed to turn that headroom into a stable deployment rule. Most conservative variants returned exact rigid fallback. The one state-conditioned gate that passed its offline development screen caused a 37.9% Cologne regression in the pre-expansion closed-loop smoke, so its full matrix was not launched. The later v123/v157a budget contrasts were also retained only as historical model-path comparisons after a Jinan domain-handling difference was found. V157B corrected B100 alone and passed its relative source-versus-target gate on the reused selector, while remaining worse than phase pressure. The authorized V157C native one-action diagnostic completed seeds 80314 and 88625, but retained seed 27178 as invalid because the fixed 480-s checkpoint contained no eligible, scorable traffic light. Its two-valid-seed descriptive means were +0.00236 for source minus target, −0.00232 for source minus matched placebo, +0.00125 for target minus PhasePressure and +0.00362 for source minus PhasePressure. Only one of two seeds improved versus target and neither improved versus the PhasePressure heuristic; all recorded collision counts were zero. The fixed three-seed protocol is incomplete and supports no three-seed inference. V158 then froze the V157B predictors and collected 100 native-prefix groups (800 candidate rows and 700 non-reference branches) from ten fixed Jinan development seeds, with no simulator-state restoration. Five whole-seed folds gave source-minus-target −0.00113 (paired 95% interval [−0.00240, +0.00019]; 6/10 seeds improved), source-minus-placebo −0.00072 ([−0.00219, +0.00091]; 7/10) and source-minus-PhasePressure +0.00014 ([−0.00239, +0.00261]; 5/10). Every preregistered OOF comparison failed; the reserve was therefore neither authorized nor run. The failure closes this Jinan native-prefix ranking-remediation route and supports no controller adoption, unseen-city claim or post-hoc retuning.

A.7 Metric population and safety accounting

SUMO `tripinfo` was written with unfinished records at the fixed 3,600-s horizon. The primary waiting-time population includes all departed vehicles, with unfinished waiting accrued to the horizon. Completed-only waiting and completion ratios are secondary outcomes. System vehicle-hours integrate active plus pending vehicles and therefore include demand not yet inserted. Across the complete matrix, 171 raw collision events collapsed to 13 unique participant–lane–time incidents in six rollouts; CFCMT had zero. All starting and ending teleport counters were zero.

Table 11: Post-v148 source-remedy ladder. Effects are normalized action-regret differences unless seconds or percentages are shown; negative values favour the source-aware arm. B100 denotes 100 target adaptation action groups. The V157C row reports descriptive means over two valid seeds because the fixed three-seed protocol was incomplete. The V158 row reports the preregistered ten-seed OOF estimates; its gate failed and the reserve was withheld. The versioned evidence identifiers are retained in the machine-readable source data, not in the displayed table.

Stage	Deployment information	Source	Held-out result	Adjudication
Repeatability diagnostic	Other development seeds; forced source	Oracle only	16/21 seed units and 7/7 city means improved	Headroom exists; not deployable
Mechanism parameter prior	Target folds plus source mechanism block	7/7 prototype	6/7 improved; mean -0.00409; placebo upper 95% +0.00089	Offline pass; source identity unresolved
Budget-aware shrinkage	B100 target folds; inverse-budget prior	1/7	mean -0.00523; no city regression	Reject multicity generality
Local mechanism context	B100 plus local right-of-way context	0/7	Exact rigid fallback in all cities	Reject
State-conditioned utility	B100 nested state-level utility labels	3/7	pre-correction historical: offline mean -0.00052; smoke: Cologne +37.9%, New York +2.6%, RESCO -17.7%	Historical; reject after closed-loop smoke
Feature-aligned dense utility	V150O replay; stored-name rigid binding	1/7 inner; 0 follow-up	macro +0.00135 vs rigid; Hangzhou +0.00942/+0.00061/+0.00093 vs rigid/placebo/blind	Reject globally and city-specifically
Leave-city-out meta utility	Six pseudo-target cities; target B100	0/7	Exact rigid fallback in all cities	Reject
Source-only hierarchical prior	Equal-city source prior; no target gate labels	0/7	forced mean +0.00277; 3/7 improved	Reject
Target-calibrated hierarchical prior	B100 target selector; same prior grid	0/7	forced mean -0.01213, 95% [-0.03879, +0.00266]	Reject; exact rigid fallback
Domain-aligned B100 source gate	V123/V157A confounded; reused 22-seed Jinan selector	One-action branch only	source-target -0.01357, 95% [-0.01784, -0.00935]; 20/22 improve; +0.02534 vs PP	B100 gate pass; V157C incomplete
Native one-action branch	Fixed Jinan roster; seed 27178 t=480 invalid	2/3 valid seeds	descriptive source-target +0.00236 (1/2 improve); source-placebo -0.00232; target-PP +0.00125; source-PP +0.00362 (0/2 improve); collisions 0; PP=PhasePressure heuristic	Incomplete; no three-seed inference
Native-prefix ranking calibration	Frozen V157B predictors; native labels; five seed-held-out folds	OOF 0/3; no reserve	source-target -0.00113, 95% [-0.00240, +0.00019] (6/10 improve); source-placebo -0.00072, 95% [-0.00219, +0.00091] (7/10 improve); source-PP +0.00014, 95% [-0.00239, +0.00261] (5/10 improve); 100 groups/800 rows/700 branches; 0 restores	Reject; OOF gate failed; reserve withheld

A.8 Discarded pressure-guard development track

Before the anchored pairwise method was developed, an exploratory controller placed a learned mechanism residual behind a MaxPressure fallback. On eight RESCO scenarios and 600-s rollouts its mean queue was 12.918, close to MaxPressure at 12.907. At 3,600 s, phase pressure was materially stronger (32.234 versus 43.511). These experiments motivated treating pressure as a hard performance ceiling, but they use a different controller, target set and metric from v43 and are excluded from the main confirmation.

Table 12: Exploratory 600-s pressure-guard stress test retained for development transparency. This is not the final anchored CFCMT controller.

Policy	Mean queue	Seed std	P90 queue	Trip time	Trip wait	Time loss	Throughput
MaxPressure	12.9068	0.1546	19.5279	87.5891	8.0605	24.5171	0.8267
CFCMT + pressure guard	12.9180	0.1919	19.5973	87.4863	8.0114	24.4127	0.8256
Phase pressure	13.2446	0.1816	19.3911	86.5371	7.4544	23.4628	0.8199
H2O+-style dense	17.2279	3.6084	28.9325	86.6585	8.5768	24.5488	0.7653
Target-static simulator	20.4023	0.1758	32.5538	97.9633	19.9032	35.3928	0.7429
Native actuated SUMO	30.1825	0.3536	47.6873	119.7813	33.0017	57.0805	0.7580
Fixed RESCO program	42.6732	0.2709	69.6852	142.3116	54.6333	79.8759	0.7127

Table 13: Exploratory 3,600-s pressure-guard boundary check. Phase pressure is the strongest policy in this discarded protocol.

Policy	Mean queue	Seed std	P90 queue	Trip time	Trip wait	Time loss	Throughput
Phase pressure	32.2343	0.9901	62.1800	104.2291	20.8528	38.5434	0.9492
MaxPressure	42.7872	0.7314	71.6277	106.9182	20.5521	40.7331	0.9448
CFCMT + pressure guard	43.5106	0.5699	74.2496	108.6326	22.0400	42.4485	0.9448
Target-static simulator	44.8973	1.2335	65.4094	258.2547	169.8900	188.9974	0.8754
H2O+-style dense	49.5058	3.9510	74.9880	221.4173	131.1706	150.3275	0.8827
Native actuated SUMO	58.3468	1.1370	99.4055	164.5754	66.1326	98.1604	0.9714
Fixed RESCO program	84.6088	0.6458	133.0312	221.2093	113.3988	154.3776	0.9385

A.9 Post-freeze fresh-seed execution-layer stress test

The v86–v89 successor track uses a target-state-conditioned 120-s action originator and global execution cooldown rather than the v43 anchored all-pair controller. Negative deltas favour the learned executor relative to phase pressure. The first three rows reuse the same 54 disclosed adaptive seeds and are not independent replications. Only v89 uses 64 newly generated seeds; its joint gate was frozen before those rollouts and failed. The eight v85 prospective seeds were not opened.

Table 14: Post-freeze Jinan execution-layer stress test. Intervals are paired simulator-seed bootstrap intervals. Development rows are shown to expose the adaptive-to-confirmatory shrinkage and are not pooled with v89.

Stage	Evidence	Seeds	Mean Δ	95% CI	Improved	Decision
v86 legacy global	adaptive screen	54	-0.429%	[-0.818, -0.033]%	68.5%	development only
v87 unbounded stay	adaptive ablation	54	0.104%	[-0.295, 0.519]%	46.3%	variant rejected
v88 one-stay budget	adaptive ablation	54	-0.242%	[-0.674, 0.195]%	55.6%	variant rejected
v89 frozen legacy	fresh confirmation	64	-0.043%	[-0.449, 0.370]%	53.1%	confirmation rejected

A.10 Native-protocol reinforcement-learning checks

Table 15: Official RESCO full-budget RL results under the upstream native protocol. Unsupported upstream scenario–algorithm pairs are not silently patched into new methods. These rows are not same-protocol comparisons with CFCMT.

Algorithm	Scenario	Runs	Time loss	Duration	Waiting	Elapsed (s)
IDQN	arterial4x4	3	1505.536	501.305	436.920	17179.205
MPLight	arterial4x4	3	1056.797	357.454	238.745	13576.024
IDQN	cologne1	3	612.737	164.905	138.950	812.441
MPLight	cologne1	3	189.393	122.751	68.843	6985.784
IDQN	cologne3	3	86.610	92.313	43.268	2351.500
MPLight	cologne3	3	1011.239	543.511	515.329	10132.753
IDQN	cologne8	3	24.760	89.379	8.354	5946.643
IDQN	grid4x4	3	47.752	158.215	25.205	11120.623
MPLight	grid4x4	3	44.393	156.112	16.598	10392.985
IDQN	ingolstadt1	3	18.097	37.191	5.490	911.332
MPLight	ingolstadt1	3	401.895	85.906	63.192	7888.143
IDQN	ingolstadt21	3	256.588	353.111	176.405	13141.256
IDQN	ingolstadt7	3	51.869	78.827	17.357	5313.646
MPLight	ingolstadt7	3	284.391	111.560	57.463	8755.139

Table 16: Patched LibSignal full-budget execution audit under native LibSignal states, rewards, timing and metrics.

Agent	Network	Runs	Travel time	Queue	Delay	Throughput	Elapsed (s)
dqn	sumo1x1	3	38.945	3.240	0.283	1998.667	175.967
frap	sumo1x1	3	41.923	24.461	0.460	1664.667	439.620
mplight	sumo1x1	3	40.546	4.373	0.319	1995.000	371.569
presslight	sumo1x1	3	39.748	3.442	0.285	1998.667	175.835
dqn	sumo1x3	3	97.090	6.531	0.244	2487.333	425.384
frap	sumo1x3	3	118.712	11.672	0.398	2505.333	1583.053
mplight	sumo1x3	3	66.502	1.876	0.243	2814.333	647.664
presslight	sumo1x3	3	63.188	1.164	0.188	2816.000	393.414
dqn	sumo4x4	3	140.610	0.603	0.041	1465.000	2140.773
frap	sumo4x4	3	140.477	0.612	0.042	1464.000	7188.185
mplight	sumo4x4	3	140.469	0.607	0.042	1464.333	1017.297
presslight	sumo4x4	3	144.279	0.711	0.048	1463.333	2080.043

A.11 Frozen artifact chain

The publication artifacts are regenerated with

```
python3 paper_tsc/figures/build_tsc_external_confirmation.py
python3 paper_tsc/figures/build_tsc_causal_transfer_schematic.py
python3 paper_tsc/figures/build_tsc_postfreeze_stress_test.py
```

Table 17: SHA-256 chain for the final external result. The paper artifact builder verifies all result gates before regenerating this table.

Artifact	SHA-256
development audit	5bcae9467cdb4cc157676e94078d204702ebdca6d51007ffca4bc85d13951066
source cache	14c6dfad87999e55fa86fa942ac0ca2334129f4d1662b3c31a6e4fc7aa74c242
target adaptation cache	beb6a968c43dd58ceac4df6d9da8dfca47fc1f0869dfda0dc151a3e9cae58d77
joint method freeze	471e8c34eb7be96411c812c7fe961d5c07f1857e3fb50d2c8d7edd59fc23c596
held-out seed-8171 result	20d682b48bca0f8821ecf98e54b04c94af87d530add51cc1d92d9a176f74cf60
closed-loop aggregate	be36c73c5835e632231140fdbdabc4bba422f54b503160c0179efc902d4534e0
post-freeze target-only ablation	238dbdc27ceb7ce016b9c995b5472cf1ad71a76632b6609b0df66408a1e26a7e
v91 legacy near-target-only confirmation	3a0ee874afeff6df96a90fb4aed4e42f79705469f0d2a72da514932385990f67
v98 preselected controller-pair confirmation	bb00da6d3ee0f9420bdd7827eeada7c0b4755fadae4a871e3de6c42ded1dc65d
v98 remote result identity audit	f8243b8279e600721f978a763415ced656c3528b190fb952877b17f2b982a91b
Los Angeles deployment model	f26ee8e5829e248ef411f77ad3e19ed0d63fd52cdfdae6d8291a9a3aeaaa7aff
Jinan deployment model	a34970f1e4f023079650866097359ec3b2509e17787685249a21363cc7b03741
closed-loop source tree	ad555ff72a11a62cc88c8bbbe2ab2f5df1db8de920af03e2f61d99aaba226a7d

```
python3 paper_tsc/figures/build_tsc_source_gate_development.py
python3 paper_tsc/figures/build_tsc_source_remedy_ladder.py
```

These commands form the figure and source-table submission contract. The unreferenced v16-era builder and its outputs are retained only as development history and must not be substituted for Figures 1–3. The first command refuses to write figures or tables if the development, external offline, joint-freeze or closed-loop validity gate is not satisfied. The third command separately requires all v86–v89 evidence-integrity audits to pass and the preregistered v89 scientific decision to remain rejected. The fourth command requires the v145, v146 and v148 development decisions to remain rejected and does not promote them to external confirmation. The fifth command requires the canonical post-v148 remedy artifacts to retain their recorded cohorts and adjudications, including the failed closed-loop smoke, exact rigid fallbacks, the superseded V123/V157A comparison, the bounded V157B B100 branch authorization and the incomplete V157C three-seed native one-action diagnostic. It also requires the V158 native-prefix OOF gate to remain failed and its reserve authorization to remain false.

References

- James Ault and Guni Sharon. Reinforcement learning benchmarks for traffic signal control. In *Advances in Neural Information Processing Systems Datasets and Benchmarks Track*, 2021.
- Yoshua Bengio, Tristan Deleu, Nasim Rahaman, Nan Rosemary Ke, Sébastien Lachapelle, Olexa Bilaniuk, Anirudh Goyal, and Christopher Pal. A meta-transfer objective for learning to disentangle causal mechanisms. In *International Conference on Learning Representations*, 2020.
- Chacha Chen, Hua Wei, Nan Xu, Guanjie Zheng, Ming Yang, Yuanhao Xiong, Kai Xu, and Zhenhui Li. Toward a thousand lights: Decentralized deep reinforcement learning for large-scale traffic signal control. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 3414–3421, 2020. doi: 10.1609/aaai.v34i04.5744.
- Longchao Da, Hao Mei, Romir Sharma, and Hua Wei. Uncertainty-aware grounded action transformation towards sim-to-real transfer for traffic signal control. In *2023 62nd IEEE Conference on Decision and Control*, pages 1124–1129, 2023. doi: 10.1109/CDC49753.2023.10383645.
- Fan Feng, Biwei Huang, Kun Zhang, and Sara Magliacane. Factored adaptation for non-stationary reinforcement learning. In *Advances in Neural Information Processing Systems*, volume 35, pages 31957–31971, 2022.
- Haoyuan Jiang, Ziyue Li, Zhishuai Li, Lei Bai, Hangyu Mao, Wolfgang Ketter, and Rui Zhao. A general scenario-agnostic reinforcement learning for traffic signal control. *IEEE Transactions on Intelligent Transportation Systems*, 25(9):11330–11344, 2024a. doi: 10.1109/TITS.2024.3377106.
- Haoyuan Jiang, Ziyue Li, Hua Wei, Xuantang Xiong, Jingqing Ruan, Jiaming Lu, Hangyu Mao, and Rui Zhao. X-Light: Cross-city traffic signal control using transformer on transformer as meta multi-agent reinforcement learner. In *Proceedings of the Thirty-Third International Joint Conference on Artificial Intelligence*, pages 94–102, 2024b. doi: 10.24963/ijcai.2024/11.
- Pablo Alvarez Lopez, Michael Behrisch, Laura Bieker-Walz, Jakob Erdmann, Yun-Pang Flötteröd, Robert Hilbrich, Leonhard Lücken, Johannes Rummel, Peter Wagner, and Evamarie Wießner. Microscopic traffic simulation using SUMO. In *2018 21st International Conference on Intelligent Transportation Systems*, pages 2575–2582, 2018. doi: 10.1109/ITSC.2018.8569938.
- Hao Mei, Xiaoliang Lei, Longchao Da, Bin Shi, and Hua Wei. Libsignal: An open library for traffic signal control. *Machine Learning*, 113(8):5235–5271, 2024. doi: 10.1007/s10994-023-06412-y.
- Haoyi Niu, Shubham Sharma, Yiwen Qiu, Ming Li, Guyue Zhou, Jianming Hu, and Xianyu Zhan. When to trust your simulator: Dynamics-aware hybrid offline-and-online reinforcement learning. In *Advances in Neural Information Processing Systems*, volume 35, pages 36599–36612, 2022.
- Haoyi Niu, Tianying Ji, Bingqi Liu, Haocheng Zhao, Xiangyu Zhu, Jianying Zheng, Pengfei Huang, Guyue Zhou, Jianming Hu, and Xianyu Zhan. H2O+: An improved framework for hybrid offline-and-online reinforcement learning with dynamics gaps. In *2025 IEEE International Conference on Robotics and Automation*, pages 1421–1428, 2025. doi: 10.1109/ICRA55743.2025.11127503.
- Bernhard Schölkopf, Francesco Locatello, Stefan Bauer, Nan Rosemary Ke, Nal Kalchbrenner, Anirudh Goyal, and Yoshua Bengio. Toward causal representation learning. *Proceedings of the IEEE*, 109(5):612–634, 2021. doi: 10.1109/JPROC.2021.3058954.

- Qian Sun, Rui Zha, Le Zhang, Jingbo Zhou, Yu Mei, Zhiling Li, and Hui Xiong. Crosslight: Offline-to-online reinforcement learning for cross-city traffic signal control. In *Proceedings of the 30th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*, pages 2765–2774, 2024. doi: 10.1145/3637528.3671927.
- Pravin Varaiya. Max pressure control of a network of signalized intersections. *Transportation Research Part C: Emerging Technologies*, 36:177–195, 2013. doi: 10.1016/j.trc.2013.08.014.
- Hua Wei, Chacha Chen, Guanjie Zheng, Kan Wu, Vikash Gayah, Kai Xu, and Zhenhui Li. Presslight: Learning max pressure control to coordinate traffic signals in arterial network. In *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, pages 1290–1298, 2019a. doi: 10.1145/3292500.3330949.
- Hua Wei, Nan Xu, Huichu Zhang, Guanjie Zheng, Xinshi Zang, Chacha Chen, Weinan Zhang, Yanmin Zhu, Kai Xu, and Zhenhui Li. Colight: Learning network-level cooperation for traffic signal control. In *Proceedings of the 28th ACM International Conference on Information and Knowledge Management*, pages 1913–1922, 2019b. doi: 10.1145/3357384.3357902.
- Xinshi Zang, Huaxiu Yao, Guanjie Zheng, Nan Xu, Kai Xu, and Zhenhui Li. Metalight: Value-based meta-reinforcement learning for traffic signal control. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 1153–1160, 2020. doi: 10.1609/aaai.v34i01.5467.
- Huichu Zhang, Siyuan Feng, Chang Liu, Yaoyao Ding, Yichen Zhu, Zihan Zhou, Weinan Zhang, Yong Yu, Haiming Jin, and Zhenhui Li. Cityflow: A multi-agent reinforcement learning environment for large scale city traffic scenario. In *The World Wide Web Conference*, pages 3620–3624, 2019. doi: 10.1145/3308558.3314139.
- Guanjie Zheng, Yuanhao Xiong, Xinshi Zang, Jie Feng, Hua Wei, Huichu Zhang, Yong Li, Kai Xu, and Zhenhui Li. Learning phase competition for traffic signal control. In *Proceedings of the 28th ACM International Conference on Information and Knowledge Management*, pages 1963–1972, 2019. doi: 10.1145/3357384.3357900.