RECOVERY LIVES IN U, CONDITIONING ACTS IN R: WHERE ARBITRARY-SCALE SUPER-RESOLUTION GAINS COME FROM

Anonymous authors

Anonymous institution

ABSTRACT

Arbitrary-scale super-resolution (ASISR) networks pair an image encoder with an implicit decoder that also receives the target pixel size, the *cell*. Decoder and cell designs keep multiplying, yet their gains shrink at large scales. We explain this with two frequency coordinates. Per-band recovery is a function of frequency normalised by the low-resolution (LR) Nyquist limit, u. Four decoder designs on a shared encoder give the same recovery to within 0.02, on crops and on full benchmark images. Longer training, a stronger encoder (RDN, SwinIR) and a larger decoder MLP raise recovery only for $u \gtrsim 0.75$, even under a blur degradation that leaves sub-Nyquist bands incomplete for interpolation. The cell, by contrast, acts on the output as a low-pass filter in high-resolution frequency r. From the orthogonality principle we derive that its cost is the recovered energy it filters away. A fixed r moves to larger u as the scale grows, where little has been recovered, so the cell's leverage vanishes. Doubling the cell costs 2.3 dB at $\times 2$, 0.13 dB at $\times 4$ and nothing measurable at $\times 6$. Retraining without the cell input still costs about 0.1 dB at every scale on standard benchmarks. This loss does not depend on scale and lies above the Nyquist limit: the cell helps training even where it no longer acts at inference. All predictions were registered before the experiments, and we report those that failed.

***Index Terms*—** Arbitrary-scale super-resolution, implicit neural representation, frequency analysis, scale conditioning

1. INTRODUCTION

LIIF [1] reconstructs an image at continuous coordinates by decoding local encoder features together with the query offset and the target cell size. Many decoders have followed: local Fourier estimators [2], integrated positional encoding [3], implicit attention [4], neural operators [5], Gaussian splatting [6] and filtered heat fields [7]. Their gains are small. A recent benchmark reports saturation, with improvements that follow model size, compute and data rather than decoder form [8]. A spectral decoder reports leads over strong baselines that vanish at large scales, without an explanation [9]. Frequency analyses of SR networks characterise low-pass behaviour [10] and sinusoidal responses [11], and study how frequency representations transfer across resolutions [12]. None of them locates *where* in frequency a decoder or the cell can still change the output, or why that room shrinks with scale.

We answer with two coordinates. For scale s and HR frequency r (cycles per HR pixel), $u = 2sr$ is the frequency relative to the LR Nyquist limit. We make three claims.

1. **Recovery lives in u.** Per-band recovery $R(u)$ does not depend on decoder design. What moves it is learned capacity (training time, encoder or decoder MLP), and only above $u \approx 0.75$.

2. **Conditioning acts in r.** Changing the cell filters the native output by an approximately scale-independent low-pass $w(r)$. Its cost equals the recovered energy at the filtered frequencies (Eq. (3)), so the cell's leverage decays with scale.

3. **Consequences.** Decoder form is not a lever, whereas capacity is, wherever it sits. At $\times 3$ and above the cell no longer acts as an inference-time control, although it still helps training.

That the cell input can sometimes hurt is known [3]. Our contribution is a quantitative account of where decoder- and cell-side changes can act at all. Each experiment fixed its code, predictions and scoring before running; Table 2 lists every outcome.

2. SETUP

Models. LIIF, LTE [2] and SC-INR (an LTE variant whose cell enters through an analytic sinc weight) share an EDSR-baseline encoder [13] and the LIIF recipe: DIV2K [14], scales drawn from $\mathcal{U}(1, 4)$, 1000 epochs, three seeds. GaussianSR [6] adds a fourth decoder on the same encoder. For matched comparisons we retrain LIIF for 200 epochs with one recipe, changing only one component: an RDN [15] or SwinIR [16] encoder, a smaller decoder MLP (2×64 instead of 4×256), or no cell input.

Data. We use DIV2K validation images 0869–0900, not used for any model selection, and full Set14 [17], BSD100 [18] and Urban100 [19]. LR inputs come from anti-aliased bicubic downsampling at $\times\{2, 3, 4, 6\}$; $\times 6$ lies outside the training range. Unless stated otherwise we evaluate centre 240^2 crops.

Measures. After a 4-pixel shave, the error and the target spectrum are split by Chebyshev frequency radius into u-bins of width 0.25. We define $R(u) = 1 - \mathrm{MSE}_u/E_u$, where E_u is the target energy in the bin. To probe the cell, we multiply the native cell by $m \in [\frac{1}{2}, 2]$ at fixed input and query.

3. RECOVERY LIVES IN U

Below the LR Nyquist limit, networks and bicubic interpolation both recover nearly everything (Fig. 1a). The networks' advantage lies in $0.75 \lesssim u \lesssim 2$: at $u = 1$, $R = 0.68$ against 0.20 for bicubic; at $u = 1.5$, 0.36 against 0.04. Curves for different scales nearly coincide. This is partly generic: bicubic interpolation collapses in u too, reflecting roughly scale-invariant image statistics and a degradation defined on the LR grid. The collapse is also only approximate (Table 2, first row). Our claims therefore rest on which components can *move* $R(u)$.

Decoder design does not. On a shared encoder, LIIF, LTE, SC-INR and GaussianSR differ by at most 0.010 in every bin (95% image-bootstrap interval $[0.007, 0.016]$; Fig. 1b). On full Set14, BSD100 and Urban100 images the spread stays below 0.019 in all 54 dataset–scale–bin cells. Accordingly, their PSNR differs by only 0.03–0.06 dB.

Learned capacity does, above $u \approx 0.75$. Three interventions change $R(u)$, and all three act only there (Fig. 1c). From epoch 100 to 1000, R rises by up to 0.045 for $u \geq 1$ while changing by at most 0.008 below $u < 0.75$. With the recipe fixed, an RDN encoder raises R by up to about 0.05 for $u \geq 1$ in both seeds, and SwinIR does likewise, with $u < 0.75$ unchanged. Shrinking the decoder MLP lowers R over the same range. Table 1 gives the PSNR effects.

The boundary is the Nyquist limit, not linear recoverability. We retrained EDSR, RDN and no-cell LIIF under a second degradation: Gaussian blur ($\sigma = 0.6s$ HR pixels) followed by bicubic resizing without anti-aliasing. Here bicubic interpolation leaves sub-Nyquist bands incomplete ($R = 0.71$ at $u = 0.5$, 0.36 at $u = 0.75$, $\times 4$). We had predicted that capacity would then also act below the Nyquist limit. It does not. Even the EDSR-baseline model recovers these bands almost fully (0.997 at $u = 0.5$), and RDN raises R only from $u \approx 0.75$ on, by up to 0.058, at every scale. The RDN gain on the DIV2K images (+0.19 to +0.33 dB) also reproduces.

4. CONDITIONING ACTS IN R

Let P_1 be the native output and P_m the output with the cell multiplied by m, both projected onto band b. Empirically,

$$P_{m,b} \approx w_m(r_b)\, P_{1,b}, \qquad w_m(r) \in \mathbb{R}, \tag{1}$$

where w_2 is a low-pass in HR frequency with its minimum at $r \approx 0.3$ for all three LIIF-family decoders (Fig. 2a). With $e_b = T_b - P_{1,b}$ the native error, Eq. (1) gives the exact expansion

$$\Delta\mathrm{MSE}_b = 2(1-w)\,\mathrm{Re}\langle e_b, P_{1,b}\rangle + (1-w)^2\|P_{1,b}\|^2. \tag{2}$$

Table 1. Matched LIIF training (200 epochs): change in benchmark PSNR (dB; Y channel, full images, shave = scale) relative to the EDSR-baseline LIIF, averaged over Set5, Set14, BSD100 and Urban100 and over two seeds. Seed differences of the baseline are ≤ 0.02 dB except Set5 $\times 6$. †One seed.

Change	$\times 2$	$\times 3$	$\times 4$	$\times 6$
decoder MLP 2×64	-0.25	-0.26	-0.28	-0.24
no cell input	-0.13	-0.09	-0.11	-0.10
RDN encoder	$+0.35$	$+0.29$	$+0.28$	$+0.25$
SwinIR encoder†	$+0.46$	$+0.42$	$+0.42$	$+0.34$

For an output equal to the conditional mean, the orthogonality principle gives $\langle e_b, P_{1,b}\rangle = 0$. The first-order term then vanishes, which is what a calibrated native cell means. The emitted energy also equals the recovered energy, $\|P_{1,b}\|^2 = R_b E_b$. Hence

$$\Delta\mathrm{MSE}(s) \approx \sum_r \big(1 - w(r)\big)^2\, R(2sr)\, E(r). \tag{3}$$

The two coordinates meet here: the cell supplies a filter in r, the network supplies recovery in $u = 2sr$. Because R falls with u, the same filter removes less and less recovered energy as s grows.

Checking the derivation. The networks are trained with an L_1 loss, so orthogonality can only hold approximately. On the DIV2K images we find $|\langle e_b, P_{1,b}\rangle|/\|P_{1,b}\|^2 \leq 0.15$ in all 105 bins with $u < 2$, for all three decoders. For $m = 2$, Eq. (3) predicts the measured cost at $\times 3$ and $\times 4$ to within a factor of 0.71–0.84. It underpredicts consistently, because the cell also changes the output beyond a per-band scalar. At $\times 2$ the shortfall reaches about $2\times$ on Set14. For small mismatch ($m = 4/3$) the first-order term dominates and the approximation fails.

Consequences. The cost of a doubled cell peaks at $r \approx 0.25$ for every LIIF-family model, seed and scale (Fig. 2b), and it tracks recovered energy (Spearman 0.77–0.78). It decays monotonically with scale: 2.3 dB at $\times 2$, 0.40 dB at $\times 3$, 0.13 dB at $\times 4$ and 0.01 dB at $\times 6$ (interval includes zero; Fig. 2c). The decay also holds for GaussianSR and for an external RDN-BTC model [20], although their cost peaks at other r. The native cell is close to optimal: no fixed multiplier improves on it by more than 0.017 dB.

5. WHAT IS A LEVER

Table 1 tests the consequences by retraining, on standard benchmarks. Stronger encoders help at every scale. Shrinking the decoder MLP hurts at every scale (0.24–0.28 dB), and again only for $u \gtrsim 0.75$ (Fig. 1c). Before training we had predicted that it would be harmless at large scales; that failed. The decoder MLP thus stores part of the above-Nyquist prior. The accurate reading is that decoder *form* is not a lever, since

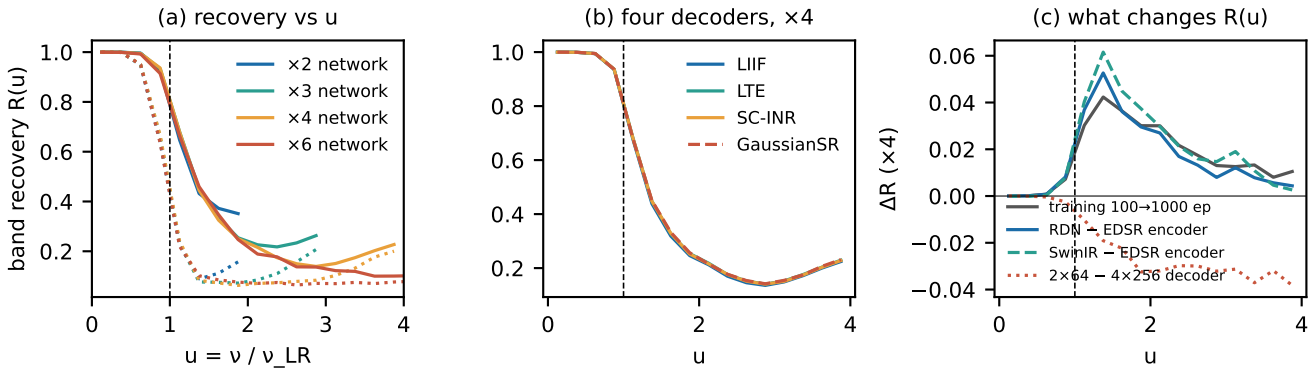


Fig. 1. Recovery in the LR-normalised coordinate u. (a) $R(u)$ at four scales (solid: mean of three decoders and three seeds; dotted: bicubic). (b) Four decoders on the same encoder at $\times 4$. (c) Change in $R(u)$ at $\times 4$ from longer training, stronger encoders and a smaller decoder MLP.

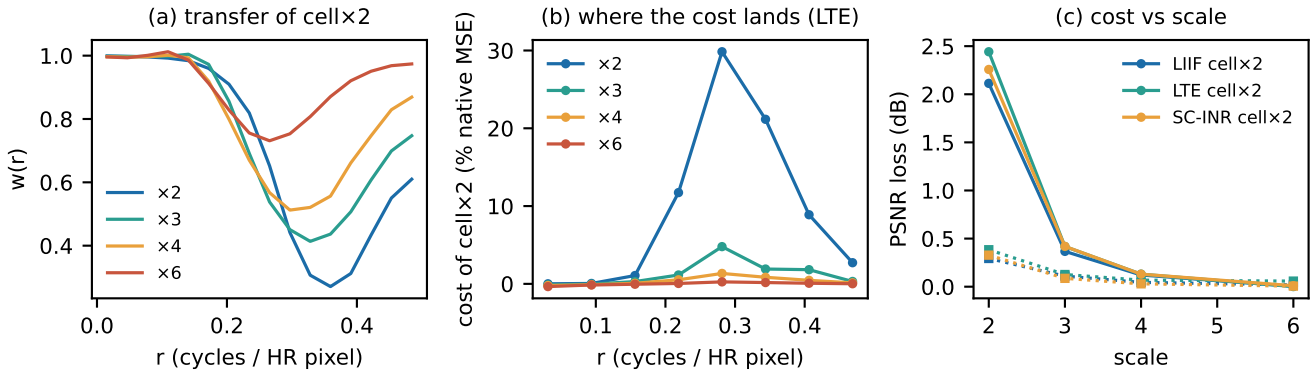


Fig. 2. Conditioning in the HR coordinate r. (a) Spectral transfer $w_2(r)$ of doubling the cell (mean of three decoders). (b) Where its cost lands (LTE). (c) PSNR cost of doubling (solid) or halving (dotted) the cell, by scale.

four designs give identical $R(u)$, while learned capacity is, wherever it sits.

Removing the cell input separates two roles of the cell. As an inference-time control, its leverage vanishes from $\times 3$ on, exactly as Eq. (3) predicts. A model *trained* without it, however, loses about 0.1 dB at every scale, consistently in both seeds. On the DIV2K images the loss is smaller (0.10 dB at $\times 2$, then indistinguishable from zero), which is why our seed-1 prediction failed only narrowly there. The loss does not shrink with scale, and on full Set14 images it sits above the Nyquist limit (R lower by 0.01–0.02 for $u \geq 2$). Supplying the cell during multi-scale training therefore helps the network learn the above-Nyquist prior, even though the same input has no measurable effect at large scales at inference. Our account explains the second fact, not the first.

6. LIMITATIONS AND CONCLUSION

We study bicubic and Gaussian-blur degradations, LIIF-style training, and convolutional and Transformer encoders. The matched arms use two seeds and short schedules. The filter model holds for large mismatch only, and the frequency at which the cell acts depends on the decoder family. The training benefit of the cell input is measured but not explained. Within these limits, ASISR gains come from what the network learns above the LR Nyquist limit. Learned capacity, not decoder form, sets that prior. The cell is an HR-frequency control whose reach is the recovered energy it filters. Eq. (3) thus tells in advance at which scales a new cell or footprint design can matter: only where $R(2sr)$ remains substantial at the frequencies the design alters.

7. REFERENCES

[1] Yinbo Chen, Sifei Liu, and Xiaolong Wang, "Learning continuous image representation with local implicit image function," in *CVPR*, 2021.

[2] Jaewon Lee and Kyong Hwan Jin, "Local texture esti-

Table 2. Registered predictions and outcomes. Fractions count bins, models, seeds or scales as specified before each run.

Prediction	Outcome
$R(u)$ spread across scales ≤ 0.05 (crops; full images)	45/54; 53/72 **fail**
four decoders within 0.03 (crops; full images)	36/36; 54/54
training raises R only for $u \geq 1$	12/12; 9/9
RDN / SwinIR raise R only for $u \geq 1$	pass / pass
seed-2 replication of matched arms	11/12; pass
cell$\times 2$ cost peaks at $r \in [0.19, 0.375)$	36/36
cell cost tracks recovered energy ($\rho \geq 0.7$)	0.77–0.78
cell leverage decays with scale	9/9
Eq. (3) within $\times[0.7, 1.3]$ at $\times 3/\times 4$	6/6
near-orthogonality (≤ 0.15)	105/105
native cell is the optimum	20/27 **fail**
a too-small cell costs more than a too-large one	33/144 **fail**
$\geq 80\%$ of cell cost at $u \geq 1$	75% **fail**
small decoder harmless at $\times 4$+	**fail**
no-cell cost ≤ 0.03 dB at $\times 4$+ (seed 1)	**fail** (narrow)
blur degradation: capacity also acts below Nyquist	**fail**
blur degradation: RDN gain, cell effect vanishes	pass, pass
encoder gain exceeds small-decoder loss	pass
no-cell cost vanishes from $\times 3$ on (benchmarks, not registered)	**no**

mator for implicit representation function," in *CVPR*, 2022.

[3] Ying-Tian Liu, Yuan-Chen Guo, and Song-Hai Zhang, "Enhancing multi-scale implicit learning in image super-resolution with integrated positional encoding," arXiv:2112.05756, 2021.

[4] Jiezhang Cao et al., "CiaoSR: Continuous implicit attention-in-attention network for arbitrary-scale image super-resolution," in *CVPR*, 2023.

[5] Min Wei and Xuesong Zhang, "Super-resolution neural operator," in *CVPR*, 2023.

[6] Jintong Hu, Bin Xia, Bin Chen, Wenming Yang, and Lei Zhang, "GaussianSR: High fidelity 2d gaussian splatting for arbitrary-scale image super-resolution," in *AAAI*, 2025.

[7] Alexander Becker, Rodrigo Caye Daudt, Dominik Narnhofer, Torben Peters, Nando Metzger, Jan Dirk Wegner, and Konrad Schindler, "Thera: Aliasing-free arbitrary-scale super-resolution with neural heat fields," *Transactions on Machine Learning Research*, 2025.

[8] Tayyab Nasir, Daochang Liu, and Ajmal Mian, "Implicit neural representation-based continuous single image super-resolution: An empirical benchmark," arXiv:2601.17723v3, 2026.

[9] Max Shad and Naeem Khoshnevis, "GB-LSR: Local spectral decoding with a learned global bandwidth for arbitrary-scale super-resolution," arXiv:2606.19617, 2026.

[10] Haoyu Deng, Zijing Xu, Yule Duan, Xiao Wu, Wenjie Shu, and Liang-Jian Deng, "Exploring the low-pass filtering behavior in image super-resolution," in *ICML*, 2024.

[11] Shusei Kawai, Fumiya Arai, Takao Marukame, Tetsuya Asai, Alexandre Schmid, and Kota Ando, "Frequency-response analysis of deep super-resolution models and visualization of degradation mismatch," *Nonlinear Theory and Its Applications, IEICE*, vol. 17, no. 4, pp. 1418–1433, 2026.

[12] Wenshuo Wang and Fan Zhang, "Breaking scale anchoring: Frequency representation learning for accurate high-resolution inference from low-resolution training," arXiv:2512.05132v2, 2026.

[13] Bee Lim, Sanghyun Son, Heewon Kim, Seungjun Nah, and Kyoung Mu Lee, "Enhanced deep residual networks for single image super-resolution," in *CVPR Workshops*, 2017.

[14] Eirikur Agustsson and Radu Timofte, "Ntire 2017 challenge on single image super-resolution: Dataset and study," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition Workshops*, 2017, pp. 126–135.

[15] Yulun Zhang, Yapeng Tian, Yu Kong, Bineng Zhong, and Yun Fu, "Residual dense network for image super-resolution," in *CVPR*, 2018.

[16] Jingyun Liang, Jiezhang Cao, Guolei Sun, Kai Zhang, Luc Van Gool, and Radu Timofte, "SwinIR: Image restoration using swin transformer," in *ICCV Workshops*, 2021.

[17] Roman Zeyde, Michael Elad, and Matan Protter, "On single image scale-up using sparse-representations," in *Curves and Surfaces*, pp. 711–730. Springer, 2012.

[18] David R. Martin, Charless Fowlkes, Doron Tal, and Jitendra Malik, "A database of human segmented natural images and its application to evaluating segmentation algorithms and measuring ecological statistics," Tech. Rep. UCB/CSD-01-1133, EECS Department, University of California, Berkeley, 2001.

[19] Jia-Bin Huang, Abhishek Singh, and Narendra Ahuja, "Single image super-resolution from transformed self-exemplars," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2015, pp. 5197–5206.

[20] Byeonghyun Pak, Jaewon Lee, and Kyong Hwan Jin, "B-spline texture coefficients estimator for screen content image super-resolution," in *CVPR*, 2023.