Forecasting Posted GPU Rental Prices from Public Catalogs: Information Timing, Service Identity, and Persistence

H. Esad Kay

October 29, 2026

Abstract

Backtests of public GPU rental catalogs can reward information that was unavailable at the forecast origin. In a paired month-start diagnostic, treating later archives as available at their nominal month-start reduces one-month on-demand persistence mean absolute log error from 0.0353 to 0.0205: a 42.0% apparent improvement on identical matched forecast cases. This is an information-set distortion, not a better forecasting method. Exploratory post-result checks give a calendar-block interval of 23.9–63.6% for this reduction, based on 18 scored origins; leave-one-provider-out estimates range from 37.5% to 44.8%. Single-origin deletions give 28.9–51.1%, indicating material time concentration despite a preserved sign. The study uses 37 public A100, H100 and H200 catalog snapshots from August 2023 to September 2026. A protocol specified before evaluation preserves observable service identity, archived availability proxies and missing outcomes, comparing five fixed methods at one-, three- and six-month horizons. Of 22,868 eligible forecast cases, 18,226 have matching targets. Persistence has the lowest provider-balanced error in all six primary comparisons, but 90.7% of its balanced one-month on-demand targets are unchanged; its advantage does not hold uniformly within changed-price outcomes. A post-result change-frequency benchmark does not beat persistence. Missingness combines shared archive delays and service-key absence, with different observed characteristics. Strict optional-field matching eliminates six-month evaluation, and primary H200 six-month coverage is limited to four on-demand cases and no spot cases. The contribution is a controlled forecast-evaluation audit building on existing reconstruction work. Results concern sampled catalog states, not executable transactions, universal model superiority or guaranteed historical market access.

Keywords: GPU rental prices; compute markets; rolling-origin forecasts; catalog data; information timing.
Research artifact: preprint; empirical data cutoff September 2026; source retrieval October 28, 2026.
Code and results: `https://github.com/esadomer/gpu-rental-backtest-audit`.

1 Introduction

GPU rental services are economically heterogeneous. The same accelerator label can refer to a single-card virtual machine, a multi-GPU server, different host resources, or an interruptible service. A public hourly quote therefore describes a bundle and a set of conditions. Forecasting an aggregate price without preserving that identity risks treating a changed product as a price move.

This paper asks a narrower question: *how accurately can a future published GPU rental quote be predicted from earlier admissible catalog records for the same observable service?* It examines public evidence rather than access to proprietary transactions. The forecast object is the future state of a sampled aggregate catalog. It is not a claim that every quote was refreshed by its underlying provider, available for immediate execution, or first learned by the market at the catalog timestamp.

The contribution is a controlled forecast-evaluation audit that preserves observable service identity, tests information timing on identical forecast cases, and accounts for missing targets. It does not propose a new forecasting algorithm. In the clearest diagnostic, the same persistence rule appears to have 42.0% lower mean absolute log error for one-month on-demand quotes when later information is incorrectly granted at month-start, holding the matched forecast cases fixed. Existing work already identifies timing, identity and staleness problems in GPU catalogs; this study measures their consequences for a future-quote forecasting

task. Specifically, it combines rolling forecasts with matured training labels, a paired information-set comparison on identical targets, and explicit accounting for services that cannot be scored. The distinction is between reconstructing and describing historical prices, which the predecessor already does, and testing what a forecast evaluator can legitimately conclude from those records. Its small, fixed model menu supplies reference comparisons. The empirical contribution does not depend on discovering a superior forecasting algorithm.

Persistence is a demanding benchmark in this sample. Its advantage over the tested alternatives remains after removing repeated whole-provider states. That finding does not imply a universally unpredictable market: the sample is short, outcomes are conditional on service survival, catalogs may be stale, and the model menu is intentionally limited. A separate result is that strict optional-field matching sharply reduces usable history. The measurement constraints are part of the result, not preprocessing details to hide.

2 Related work and scope

GPU spot-price prediction predates the current accelerator generation. Khan et al. (2022) compare autoregressive, ARIMA, exponential smoothing and GARCH methods. The present study does not reproduce that experiment or claim that these five simple specifications exhaust its models. It instead studies newer public multi-provider catalog records and the validity of their forecast information sets.

The closest data predecessor is Mittal (2026), whose public repository reconstructs cloud GPU price histories from versioned sources and documents source-specific measurement problems. Its pinned monthly panel supplies the archive identifiers used here. Forecast prices in this study are independently parsed from the original archives; the analysis does not adopt the predecessor's cleaned index, retrospective price filters or backfilled rows as point-in-time features. This distinction concerns research purpose, not a claim that a historical measurement dataset is defective. The public predecessor already discusses publication versus effective dates, late snapshots, stale members, entity resolution, matched-item indexes and survivorship, and uses publication-date filters in contemporaneous GPU-selection analysis. These ideas are not claimed as new here. The inspected public code and reports did not reveal the fixed rolling future-rental forecast experiment or the matched-case 42.0% timing diagnostic reported here. A renewed audit on October 28, 2026 found the current public revision identical to the pinned release, but no accessible full manuscript; novelty relative to the described paper under review therefore remains uncertain. The project repository provides a path-level overlap audit.

Bandi and Su (2026) study compute asset pricing and discuss the implications of non-storable compute for spot–futures relationships. The present catalog-forecast exercise neither estimates their risk premium nor replicates synthetic futures. The fact that public quotes can be predicted does not itself establish an implementable trading strategy. Rolling-origin evaluation and simple benchmarks follow standard forecasting practice (Hyndman and Athanasopoulos, 2021). Cross-sectional repetition and few time blocks motivate caution about conventional independent-observation inference (Cameron and Miller, 2015).

The original project also audited new physical GPU purchase prices. The examined retail histories did not establish historical condition and seller continuity for a comparable A100/H100/H200 panel. No physical-price variable or synthetic physical backtest is included here. The audit is retained in the accompanying research files rather than used to imply an identified purchase-to-rental relationship.

3 Data and admissible observations

3.1 Archive construction and provenance

The evidence consists of 37 public `gpuhunt` ZIP archives (dstack, gpuhunt), selected by the monthly snapshot identifiers in a pinned revision of Mittal (2026). The first is dated August 28, 2023; September 2023 is absent; the final archive is September 1, 2026. This is a retrospective selection of monthly snapshots, not a complete inventory of every file a historical user could have downloaded.

For each archive, the manifest preserves its URL, retrieval time, SHA-256 checksum, embedded version

and HTTP S3 Last-Modified timestamp. The latter is a proxy for availability of that archived object. It does not prove when public access was enabled, when a provider refreshed its underlying data, or the earliest time a market participant could know a price. All timing conclusions are conditional on this archival proxy. An additional 24-hour publication lag tests a small delay in access.

The parser retains exact A100, H100 and H200 labels and separates their reported GPU memory. GH200, H100NVL and other labels are excluded. GCP and RunPod are excluded because the prior audit identifies unresolved historical price-classification or service-tier ambiguities in their common fields. These exclusions are based on metadata evidence, not future forecast performance. The retained economic providers are AWS, Azure, Lambda, DataCrunch/Verda, Nebius and OCI.

DataCrunch and Verda appear as separate members in nine 2026 archives. Their entire normalized core offer tables are identical, and all 810 target-GPU Verda records exactly match DataCrunch. The provider's rebranding notice confirms corporate continuity (Verda, 2025). The analysis retains the longer DataCrunch source history and rejects the duplicated Verda modeling records, preserving both members in the inventory. This factual correction was made after the first model run and is disclosed in the protocol amendment; the original protocol and initial summaries remain available. The alias relationship is also documented in the predecessor's public data notes. No service history is stitched across aliases.

After removing 810 alias records, 2,847 conflicting same-snapshot identity records, 28 exact duplicate captures and 39 invalid-numeric target records, the resulting panel contains 20,377 service-month records and 1,214 core identities. These are records, not independent market discoveries. Across the entire panel, 3,665 successive same-key records change price, occurring in 93 provider-months. Even a provider-month need not represent an independent economic shock.

3.2 Price and service identity

The price is the catalog's USD hourly instance quote divided by its GPU count. Provider-specific aggregation remains relevant: the predecessor documentation describes gpuhunt AWS spot quotes as the minimum across availability zones within a region, rather than a particular zone's executable quote. It includes host resources, and is not a bare accelerator rental or hardware resale value. The primary identity consists of provider, location, instance name, accelerator name and memory, GPU count, CPU count, host RAM, and spot/on-demand status. Numeric fields use exact canonical decimal strings; textual identifiers are trimmed without inferred aliases or case matching. A record containing a nonpositive or invalid required number is excluded. Multiple prices for the same key in one archive are rejected rather than resolved by selecting the cheapest offer.

Disk size and CPU architecture appear inconsistently as the archive schema evolves. The primary key uses fields present from the earliest schema; a strict sensitivity adds both optional fields, preserving missing values as unknown and breaking continuity when reporting changes. Unobserved networking, storage performance, contract duration, support, taxes and physical form factors may still differ. The key identifies comparable *observable* bundles, not a certified identical service contract.

3.3 Repeated members and freshness

Each provider member has a raw-byte checksum and a second fingerprint of its normalized, sorted core offer table, including prices. The latter is invariant to row order, numerical spelling and optional schema additions. It is computed over the whole provider member, not just the target GPUs. A repeated state may reflect unchanged prices or an unrefreshed upstream feed; those explanations cannot generally be distinguished.

The primary analysis forecasts the published aggregate-catalog state and retains repeated member states. A conservative freshness sensitivity excludes repeated states from both historical observations and targets. A changed member is not proof that every offer was refreshed. This sensitivity changes the sample and history, so the difference in errors cannot be interpreted as a causal estimate of staleness bias.

4 Forecast protocol

The machine-readable protocol was frozen after the source audit and before forecast performance was computed. It was not publicly preregistered. The provider-alias correction and a reporting correction aligning diagnostic-rate weights with loss weights were recorded after implementation review. No model or tuning parameter was chosen from the resulting accuracy ranking.

4.1 Origins, horizons and targets

Primary origins are 00:00 UTC on the eighth day of each month, starting January 2025. An input archive must have an availability proxy no later than the origin. A service requires 12 earlier observations and a most recent quote no older than 45 days. Gaps are permitted; all trend calculations use elapsed time rather than treating missing months as adjacent. The six-observation sensitivity admits shorter histories.

For nominal horizon $h \in \{1, 3, 6\}$, the target is the same service key's quote in the selected archive for month $t + h$, provided that archive was available by the eighth day of that month. A missing key, absent archive or late archive produces a missing target. No missing target is replaced by the last known price. Origins whose target month lies after September 2026 are excluded before evaluation; other missing outcomes remain in the eligibility denominator.

The observed one-month target records were published approximately 21–27 days after the origin, three-month records 82–88 days after, and six-month records 174–177 days after. Thus the horizons are calendar-month labels, not exact 30-, 90- or 180-day price realizations. They measure a sampled quote at the horizon, not the total cost of renting continuously over it. The two late 2026 target archives also remove complete origin-months from several scored comparisons.

4.2 Models

Let $p_{i,s}$ be the last admissible quote for service i, and $\ell_{i,s} = \log p_{i,s}$. Persistence sets $\widehat{p}_{i,t+h} = p_{i,s}$. Drift extrapolates the first-to-last observed log-price change per elapsed month. Local trend fits an OLS slope to log price against elapsed months over the last 12 observations, then anchors the extrapolation at the latest price. Damped trend multiplies this slope contribution by 0.5. These are simple reference specifications, not an exhaustive search over classical forecasting methods.

Pooled ridge estimates the direct target log return,

$$y_{i,t,h} = \log p_{i,t+h} - \log p_{i,s}, \qquad (\widehat{\alpha}_h, \widehat{\beta}_h) = \arg\min_{\alpha,\beta} \sum_{j \in \mathcal{T}_{t,h}} w_j (y_j - \alpha - z_j^\top \beta)^2 + 0.1 \|\beta\|_2^2. \tag{1}$$

The seven features are the last log return per elapsed month, local log-price slope, standard deviation of recent log returns per elapsed month, log current price, log GPU count, log GPU memory and a spot indicator. Features are standardized using weighted training means and variances; the intercept is not penalized. Training pools accelerator families and markets but fits each horizon separately. Within training, each origin receives equal total weight, each provider within an origin receives equal weight, and examples within that provider-origin receive equal weight.

Training examples may have four historical observations; evaluated primary cases still require twelve. A label enters training only after both its actual archived publication proxy and its target cutoff are no later than the current origin. At least six matured training-origin months and 30 examples are required; otherwise the model explicitly falls back to persistence. The evaluated primary cases do not invoke that fallback. A conditional provider-holdout sensitivity removes the evaluated provider's training labels while retaining its observed lag features; this is not a cold-start experiment.

All extrapolated log returns are clipped to $[-\log 10, \log 10]$ relative to the latest quote. This predetermined bound prevents extreme numerical extrapolation and is reported rather than hidden. It never activates in the primary evaluation. No price series is generated synthetically; synthetic fixtures are restricted to software tests.

4.3 Losses, missingness and uncertainty

For each market and horizon, the primary mean absolute log error is

$$L_{m,h} = \frac{1}{|T|} \sum_{t \in T} \frac{1}{|P_t|} \sum_{a \in P_t} \frac{1}{|I_{a,t}|} \sum_{i \in I_{a,t}} \left| \log \widehat{p}_{i,t+h}^{(m)} - \log p_{i,t+h} \right|. \tag{2}$$

Here T contains scored origin months, P_t the providers represented at that origin, and $I_{a,t}$ its matched services. This gives a provider with many regional rows no automatic advantage in total weight. The provider set can change across origins; this is a repeated cross-section of eligible survivors, not a fixed market portfolio. GPU/VRAM-specific tables use the same nesting. Dollar-per-GPU-hour MAE is a secondary measure. Log error is not MAPE and is not reported as a literal percentage price error.

All five models are scored on the same observed cases within a specification. Target attrition is reported as a raw fraction of eligible cases. Unchanged-price and repeated-member rates use the same nested weights as the losses; raw-row versions are also retained. Because evaluation conditions on target observability, neither weighting nor accuracy establishes performance for delisted services.

Paired alternative-minus-persistence loss differences are calculated by origin. Exploratory 95% circular moving-block intervals retain the full monthly calendar, including missing origins, with block length $\max(3, h)$, 2,000 replications and a fixed seed. Intervals are suppressed when fewer than four block-length equivalents of observed origins remain. In particular, the six-month headline comparisons have too few time blocks for these intervals. These diagnostics and leave-one-provider-out summaries describe stability; they do not supply strong population inference or independent-trade significance.

5 Results

5.1 Coverage and persistence

Table 1 shows the primary evaluation population. There are 22,868 eligible service-origin-horizon cases and 18,226 observed targets across horizons; the same service can contribute multiple, overlapping forecasts. Missing outcomes range from 14.5% to 19.8% for on-demand and 31.5% to 39.0% for spot. The short H200 history is especially restrictive: only four on-demand six-month cases and no spot six-month cases meet the primary matching rules. Those four cases are not four independent economic events.

Market	h	Eligible	Observed	Months	Prov.	Missing	Same
On Demand	1	7,031	6,015	18	6	14.5%	90.7%
On Demand	3	6,094	5,103	16	6	16.3%	75.9%
On Demand	6	4,800	3,848	13	6	19.8%	58.4%
Spot	1	2,046	1,402	18	4	31.5%	34.0%
Spot	3	1,674	1,112	16	3	33.6%	22.3%
Spot	6	1,223	746	13	3	39.0%	14.6%

Table 1: Primary coverage. Months count scored origins; providers count distinct represented economic providers. Missing is the raw eligible-case attrition rate. Same is the provider-balanced unchanged-target rate. Counts are not independent sample sizes.

Persistence yields the lowest aggregate mean absolute log error in each of the six market–horizon cells (Table 2). One-month persistence MAE is \$0.054 per GPU-hour for on-demand and \$0.194 for spot. These results are conditional on the selected surviving services, not a guarantee for any current quote or workload.

Market	h	Persist.	Drift	Trend	Damped	Ridge
On Demand	1	0.0206	0.0337	0.0362	0.0284	0.0318
On Demand	3	0.0618	0.0882	0.0944	0.0778	0.0913
On Demand	6	0.1342	0.1739	0.1810	0.1552	0.1708
Spot	1	0.1429	0.1680	0.1753	0.1570	0.1520
Spot	3	0.2389	0.3013	0.3314	0.2767	0.2623
Spot	6	0.2968	0.4550	0.5178	0.3907	0.3282

Table 2: Mean absolute log errors, balancing origins and providers. Smaller is better. Damped trend uses a fixed one-half trend contribution; ridge uses a fixed penalty. No model selection uses these results.

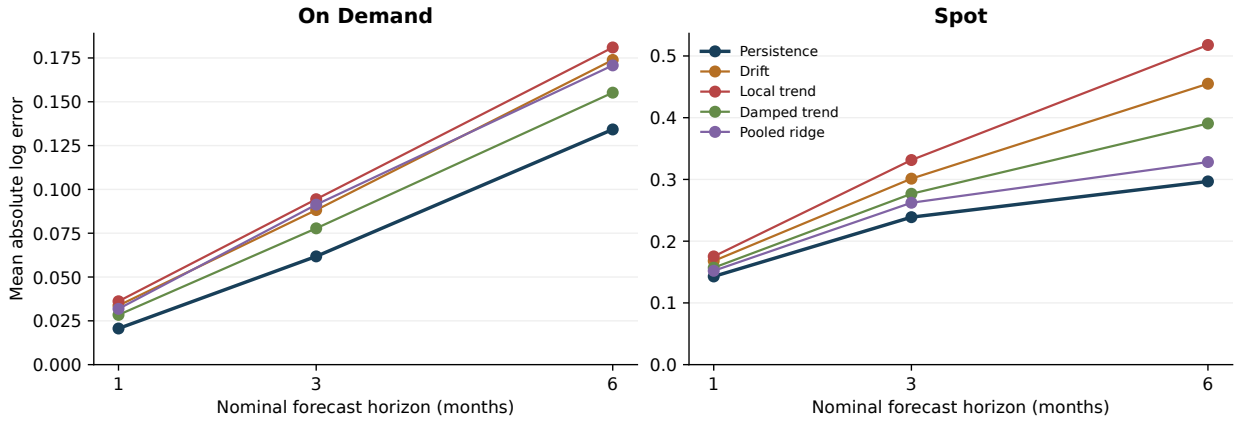


Figure 1: Forecast errors for the fixed model menu. Each curve uses identical observed targets within a market and horizon. The six-month results contain only 13 scored origins, with overlapping outcomes.

The balanced unchanged-target share is 90.7% for one-month on-demand and 34.0% for one-month spot. Whole-provider member repetition accounts for 22.5% and 3.2% of the corresponding balanced target populations. Figure 2 separates these quantities: unchanged quotes, repeated provider states and missing targets are distinct phenomena.

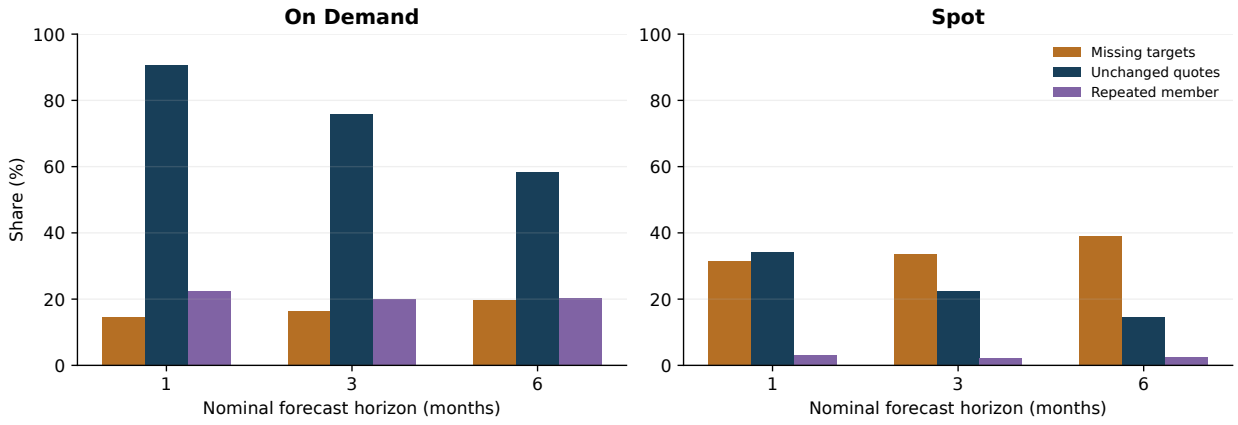


Figure 2: Measurement limits. Missing targets use raw eligible-case fractions; unchanged quotes and repeated members use provider-balanced fractions among observed targets. A repeated provider table does not prove stale prices, and an unchanged price in a changed table does not prove fresh observation.

5.2 Robustness and what it does not resolve

Removing repeated member states preserves the headline persistence ranking, but reduces one-month on-demand observed cases from 6,015 to 2,965. The error comparison changes along with provider composition and usable history. It cannot isolate a pure staleness effect. Strict optional-field matching leaves only six scored one-month origins and three scored three-month origins; no six-month target survives. This is evidence that claims about fully fixed services face much less data support than the core-field panel suggests.

Specification	Market	Cases	Months	Persist.	Ridge
Primary	On Demand	6015	18	0.0206	0.0318
Primary	Spot	1402	18	0.1429	0.1520
Repeated members removed	On Demand	2965	18	0.0269	0.0396
Repeated members removed	Spot	1349	18	0.1508	0.1585
Six observations	On Demand	7689	18	0.0208	0.0320
Six observations	Spot	2138	18	0.1566	0.1696
Strict identity	On Demand	1873	6	0.0229	0.0359
Strict identity	Spot	389	6	0.1680	0.1745
Provider holdout	On Demand	6015	18	0.0206	0.0376
Provider holdout	Spot	1402	18	0.1429	0.1517

Table 3: Selected one-month sensitivity results. These are different samples except provider holdout, which changes ridge training only. The complete horizon/model outputs accompany the study.

The additional 24-hour publication lag leaves the primary cases and scores unchanged under the eighth-day schedule. This checks a small timing perturbation, not the validity of the archive proxy itself. The six-observation cohort and conditional provider holdout also fail to reverse the aggregate persistence ranking. Cross-provider learning in this particular ridge specification therefore does not establish a transferable improvement. The leave-one-provider-out tables and GPU-specific results are supplied to prevent an aggregate result from concealing its changing composition.

5.3 A paired information-timing diagnostic

The primary schedule allows first-week archives to become observable. A separate diagnostic moves origins to month-start and compares two information sets on 17,065 identical key/origin/horizon/target cases. The admissible variant uses archived publication times. The deliberately inadmissible variant treats each nominal month's archive as available at the start of that month, even when it was published later. It keeps actual archive dates for elapsed-time calculations and uses the same eighth-day rule for target inclusion.

In 98.7% of matched cases, that nominal-label variant uses a predictor published after the forecast origin. Table 4 reports the persistence comparison. For the one-month on-demand comparison, the score falls from approximately 0.0353 to 0.0205, an apparent reduction of 42.0%; the analogous spot reduction is 33.9%. These are relative reductions in the *error metric*, not rental-price changes or trading returns. The intentionally contaminated variant is a diagnostic, not a valid strategy, and does not establish that all nominally dated historical datasets are unusable.

Market	h	Actual timing	Nominal label	Apparent reduction
On Demand	1	0.0353	0.0205	42.0%
On Demand	3	0.0834	0.0602	27.8%
On Demand	6	0.1474	0.1352	8.3%
Spot	1	0.2077	0.1373	33.9%
Spot	3	0.2731	0.2425	11.2%
Spot	6	0.3051	0.2918	4.3%

Table 4: Persistence on identical matched day-one cases. Actual timing uses the archive proxy; nominal label grants later information. Coverage differences outside the intersection are reported separately in the run manifest.

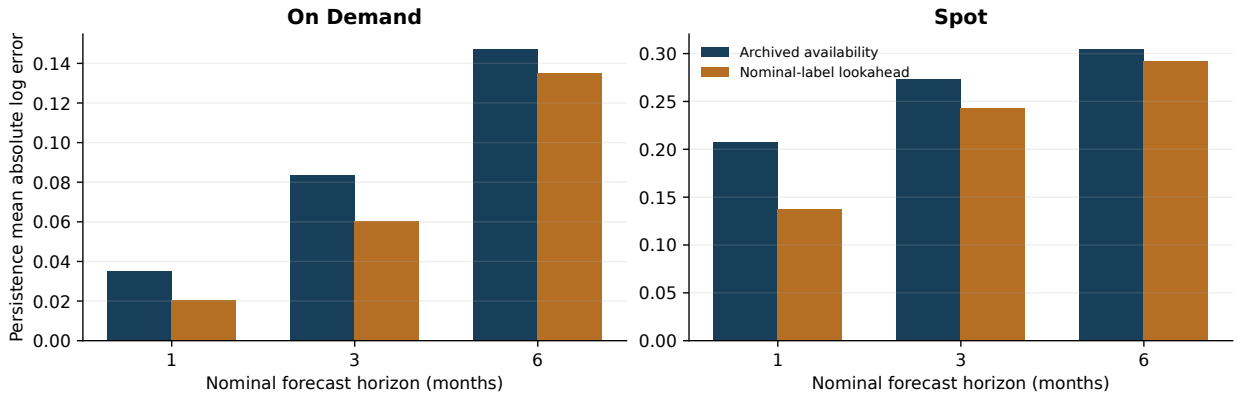


Figure 3: The month-start diagnostic demonstrates sensitivity to the information set. It does not estimate the accuracy of a trade executable on the first day of each month.

6 Exploratory stability and selection diagnostics

The analyses in this section were specified after the original results were known. Their separate machine-readable plan was frozen before these additional calculations, but they are exploratory and use the same data. They do not constitute preregistration or independent confirmation. The original protocol, five-model results and earlier artifacts remain available. No new empirical observations or imputed prices enter the supplement.

6.1 How stable is the 42% timing result?

The one-month on-demand timing comparison contains 5,753 paired cases across 18 scored origins, spanning a 20-month calendar. Its exploratory 95% circular block interval for the relative error reduction is [23.9%, 63.6%] with three-month blocks and 2,000 paired draws. The corresponding absolute MALE reduction is 0.01485, with interval [0.00425, 0.03091]. Actual and nominal origin losses are resampled together, and the ratio of their mean losses is recalculated in each draw. The full protocol calendar is retained, including unscored April and June 2026 origins. The statistic is not a mean of per-origin percentage reductions.

Two- and four-month blocks give relative intervals of [23.1%, 67.3%] and [25.8%, 61.1%]. Six-month-block intervals are suppressed because 18 observed origins fall below the four-block-equivalent threshold. For other forecast horizons the primary block length remains $\max(3, h)$; in particular, no primary six-month interval is reported. These intervals describe stability under the specified resampling scheme. Few months, common shocks and possible regime changes limit their confidence-coverage interpretation. They do not establish population significance. No usable draw in an estimable interval has a zero baseline; the implementation would suppress the relative interval if that occurred.

Population	Cases	Months	Actual	Nominal	Reduction
Full sample	5,753	18	0.0353	0.0205	42.0%
Omit AWS	5,328	18	0.0320	0.0188	41.1%
Omit Azure	3,942	18	0.0445	0.0260	41.6%
Omit DataCrunch	5,302	18	0.0223	0.0124	44.4%
Omit Lambda	3,647	18	0.0389	0.0243	37.5%
Omit Nebius	5,731	18	0.0339	0.0187	44.8%
Omit OCI	4,815	18	0.0403	0.0226	44.0%
2025 origins	3,312	12	0.0357	0.0202	43.5%
2026 origins	2,441	6	0.0347	0.0211	39.1%

Table 5: One-month on-demand persistence timing diagnostic. The actual and nominal forecasts remain paired within each row's population. Provider omissions are reweighted; year slices use forecast-origin years. All omission rows retain 18 origins, while 2026 contributes only six scored origins.

The apparent reduction remains positive in every provider-omission comparison (Table 5), but this does not mean that every provider exhibits it. Nebius has equal losses under both timing rules over only three represented origins. OCI has zero loss under both, making its relative reduction undefined. The remaining individual-provider reductions range from 37.7% to 70.9% on their own observed support. The 2025/2026 reductions are 43.5% and 39.1%, respectively. These comparisons change composition and time support; they do not isolate provider effects or identify a stable economic regime.

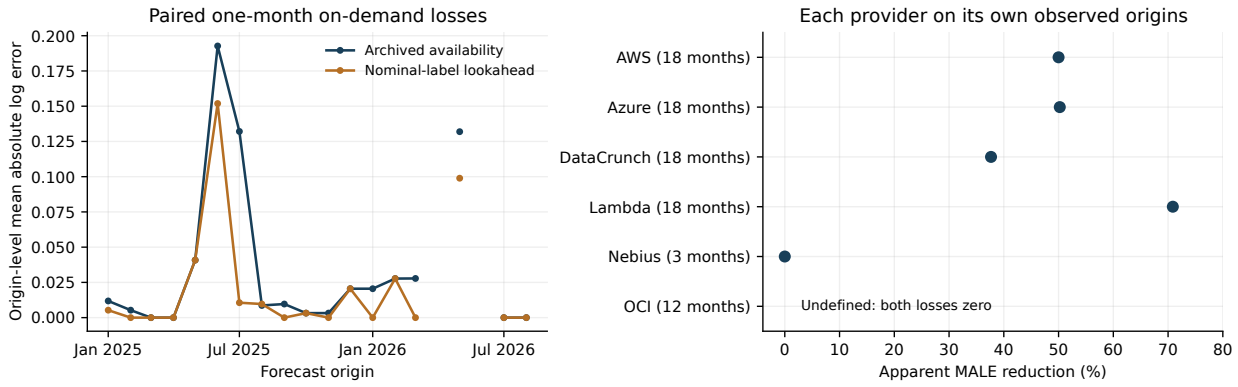


Figure 4: Exploratory timing detail. Left: paired origin losses with missing months left as gaps. Right: individual providers, each evaluated over its own observed origins. Provider percentages are not additive contributions to the full-sample reduction; OCI's zero denominator is not assigned a percentage.

Removing each observed forecast-origin month in turn gives one-month on-demand reductions from 28.9% to 51.1%, with 17 origins retained in every run. Omitting July 2025 gives the minimum; omitting June 2025 gives the maximum. These are recomputed ratios of paired mean losses, not averages of monthly percentage reductions, and no model is refitted. The sign therefore survives every single-origin deletion, but the magnitude is sensitive to particular months. July 2025 alone contributes 45.5% of the full sample's signed actual-minus-nominal MALE difference. Single-origin deletion cannot rule out joint concentration across several months or establish a regime-independent effect.

Market	h	Runs	Minimum	Omitted	Maximum	Omitted
On Demand	1	18	28.9%	2025-07	51.1%	2025-06
On Demand	3	16	21.2%	2025-07	32.9%	2025-05
On Demand	6	13	3.7%	2025-07	9.7%	2025-01
Spot	1	18	31.1%	2025-01	36.2%	2026-08
Spot	3	16	9.1%	2026-06	12.7%	2026-05
Spot	6	13	1.8%	2025-06	6.7%	2025-01

Table 6: Leave-one-origin-out timing sensitivity. Each run removes one complete observed origin from the paired comparison and equally averages the remaining origin losses. Minimum and maximum are relative error reductions, not confidence bounds. Missing calendar origins are not deletion runs. All 94 defined deletion results remain positive; these reruns are dependent diagnostics. Individual runs and retained-case counts are available in the repository.

6.2 What happens when prices actually change?

Partitioning by the realized outcome separates persistence's exact predictions on unchanged quotes from its performance on repricing cases. The one-month on-demand changed subset contains 423 rows, nine origins and 12 provider-origin groups. It represents 9.3% of the original balanced target weight, compared with 7.0% of raw rows. The spot changed subset contains 695 rows and represents 66.0% of balanced target weight. These are post-outcome categories, not information a forecaster can use to select cases in advance.

For this diagnostic, the complete observed cell's original weights w_i remain fixed. If C denotes a subgroup, its mass is $s_C = \sum_{i \in C} w_i$ and its conditional loss is $L_C = \sum_{i \in C} w_i e_i / s_C$. Thus $L = s_{\text{changed}} L_{\text{changed}} + s_{\text{same}} L_{\text{same}}$. Rebalancing each subgroup separately would answer a different question and would break this decomposition.

Model	OD changed	OD same	Spot changed	Spot same
Persistence	0.2227	0.0000	0.2166	0.0000
Drift	0.2242	0.0143	0.2349	0.0383
Local trend	0.2280	0.0166	0.2465	0.0374
Damped trend	0.2253	0.0083	0.2284	0.0187
Pooled ridge	0.2209	0.0125	0.2171	0.0260
Frequency-shrunk trend	0.2234	0.0016	0.2278	0.0078

Table 7: One-month conditional MALE with original observed-cell weights preserved. OD denotes on-demand. The frequency-shrunk row is the separate exploratory benchmark defined below. Conditional losses are normalized by subgroup mass, not averaged as if both groups had equal mass.

Pooled ridge has slightly lower on-demand changed-case MALE than persistence (0.2209 versus 0.2227), while its unchanged-case MALE is 0.0125 rather than zero. The latter error affects 90.7% of balanced target weight, explaining its worse overall score. No changed-only superiority or statistical significance is established from this small, post-outcome slice. Persistence remains best among the original five models for changed spot quotes at one month. Its aggregate advantage therefore reflects both price rigidity and model behavior at repricing events, with different conclusions across markets.

6.3 Which targets cannot be observed?

Late archives and absent service keys should not be treated as equivalent losses of coverage. Of 1,016 missing one-month on-demand targets, 901 belong to just two late target-month archives (May and July 2026); 115 have absent keys in otherwise timely archives. Spot missingness is more evenly divided: 319 late-archive cases and 325 absent-key cases. The original rule checks archive lateness first, so a late-archive status does not reveal whether that key was present. Neither status establishes permanent delisting.

Market	h	Eligible	Late archive	Absent key	Absent / on-time
On Demand	1	7,031	901	115	1.9%
On Demand	3	6,094	844	147	2.8%
On Demand	6	4,800	817	135	3.4%
Spot	1	2,046	319	325	18.8%
Spot	3	1,674	237	325	22.6%
Spot	6	1,223	173	304	29.0%

Table 8: Primary target missingness, in raw eligible cases. The final column divides absent-key cases by eligible cases excluding late archives. It is an absent-key rate conditional on an on-time archive, not a correction for selection. Shared archive events and overlapping horizons prevent interpreting rows as independent failures.

Among one-month eligible cases with on-time target archives, absent keys account for 1.9% of on-demand and 18.8% of spot cases. The 325 absent spot keys include 267 Azure and 58 DataCrunch cases. At their forecast origins, these absent-key spot cases have a raw mean quote age of 17.7 days and 15.9 historical observations, compared with 13.7 days and 18.4 observations for observed spot targets. On-demand absent-key cases have a higher raw mean past repricing frequency than observed cases (15.5% versus 4.4%). These characteristics are known at the origin, but their differences also reflect provider and time composition.

The supplement exports status counts by provider, GPU/VRAM, origin year and provider/GPU, together with raw feature means and original eligible-weight shares. For example, total one-month on-demand missingness is 14.5% by raw cases and 12.0% under eligible-cell nested weights; these denominators differ from the observed-case weights used to score accuracy. The descriptive contrasts indicate that observability is structured. They do not identify the missing outcomes, prove conditional independence of missingness, or determine the sign of any bias in reported forecast error. No inverse-probability correction or invented missing-target backtest is applied.

6.4 A simple change-frequency benchmark

Let $f_{i,t}$ be the fraction of repriced adjacent nominal-month pairs among a service's last 12 admissible observations. Pairs spanning missing months are excluded, and all underlying records must have been published by the origin. With $q_{i,t,h} = 1 - (1 - f_{i,t})^h$, the additional forecast is

$$\log \widehat{p}^{\,\mathrm{freq}}_{i,t+h} = \log p_{i,s} + q_{i,t,h}\big(\log \widehat{p}^{\,\mathrm{damped}}_{i,t+h} - \log p_{i,s}\big). \tag{3}$$

This fixed heuristic shrinks the original bounded damped trend toward persistence when historical repricing is infrequent. The factor q is a nominal-horizon shrinkage factor, not a calibrated probability of a price change. In particular, the damped trend uses elapsed time from the last publication to the target cutoff, whereas h is measured from the forecast origin. A history without an adjacent pair falls back explicitly to persistence; no evaluated case needs this fallback. The window and formula were fixed before evaluating this supplement, with no tuning or alternative-formula search.

Market	h	Persistence	Damped	Freq.-shrunk	Excess error
On Demand	1	0.0206	0.0284	0.0222	7.4%
On Demand	3	0.0618	0.0778	0.0687	11.2%
On Demand	6	0.1342	0.1552	0.1451	8.1%
Spot	1	0.1429	0.1570	0.1529	7.0%
Spot	3	0.2389	0.2767	0.2720	13.9%
Spot	6	0.2968	0.3907	0.3860	30.1%

Table 9: Exploratory frequency-shrunk benchmark on exactly the original primary observed cases. Excess error is the relative MALE increase over persistence, calculated from unrounded scores before formatting the displayed MALE values. The original five-model experiment is unchanged.

The heuristic reduces the damped trend's error in all six cells, but its error remains 7.0–30.1% above persistence. This is evidence against this particular fixed adjustment, not against every conditional or event-based model. The full supplement includes paired comparisons and the original horizon-aware uncertainty policy; six-month intervals remain suppressed.

7 Implications and limitations

For a compute-pricing desk, a forecast should travel with its service identity, source timestamp, input age, member-repetition indicator and missing-target history. In this sample, simple persistence provides a useful benchmark against which to demand evidence from more elaborate methods. A large model improvement without those controls could instead reflect newer information, a changed service or a different survivor population.

Several limits remain material. All observations come through one public aggregation pipeline; multiple providers are not independent data-collection systems. Archive timestamps are imperfect availability proxies. Catalog quotes are not transactions and do not prove capacity, counterparties, execution terms or interruption costs. Monthly sampling misses within-month variation, especially for spot services. Excluding ambiguous providers improves interpretability while narrowing market coverage. The primary key omits some service conditions; the stricter key cannot support a six-month backtest. H200 results are sparse. Regional rows share provider decisions and time shocks, and overlapping forecast horizons further reduce effective information.

The original model set contains four simple time-series references and one fixed pooled regression; the supplemental analysis adds one disclosed post-result heuristic. This limited comparison cannot rule out improvements from suitable event information, a better specified dynamic model, a longer history, or provider-native refreshed records. Changed-outcome comparisons and missingness diagnostics explain the sample without repairing its selection problem. No conclusion about causal supply or demand effects, futures risk premia, hardware depreciation, realizable arbitrage or market efficiency follows from the error ranking. Public-source availability also does not automatically establish blanket redistribution rights; the reproducibility package separates retrieval instructions from third-party raw archives.

8 Conclusion

The paired month-start diagnostic produces a 42.0% apparent one-month on-demand error reduction solely by changing the permitted information set, while holding forecast cases fixed. This is the central measurement result. Exploratory block, provider-omission, origin-year and single-origin-deletion checks preserve its direction, while the deletion analysis reveals substantial concentration in particular months. These checks do not rule out joint dependence on several repricing events. Under the admissible primary schedule, persistence outperforms the fixed alternatives in aggregate, but its advantage does not extend uniformly to changed-price subsets. The additional frequency heuristic does not reverse the aggregate ranking. Missing outcomes include both shared archive delays and service-key absences, whose forecast errors remain unidentified. Forecast accuracy must therefore be interpreted together with availability rules, observable service identity, price rigidity, repeated provider states and missing outcomes. These results extend an existing public reconstruction into a controlled forecast audit; they do not establish first discovery of the underlying data issues or universally unforecastable compute prices. Sparse long-horizon H200 evidence remains a binding limit.

A Reproduction and audit trail

The public project is available at `https://github.com/esadomer/gpu-rental-backtest-audit`. It provides the original locked protocol, explicit post-first-run provider-alias amendment, source manifests, extraction and evaluation scripts, behavioral tests, all supplemental analyses, aggregate results, and the manuscript source. Downloadable source and reproducibility packages accompany the compiled preprint. The supplied commands download the registered public inputs and regenerate every eligible forecast case, including missing

targets, followed by the timing, conditional-loss, attrition, frequency-benchmark and origin-deletion diagnostics. Raw third-party archives and row-level outputs are not bundled in the repository or reproducibility package. The protocol SHA-256 is:

`6d3f44cede6f791542aeed2425f5325b85c01f0a2c3bf119e045f77b4a6574e5`

Run manifests fingerprint the amended method, archived inputs and research code. The supplemental analyses have separate post-result plans, freeze records and run manifests. A preserved base-run reference authenticates the original scientific fields while allowing fresh reproduction timestamps, runtime metadata and additional script entries; original code and empirical input hashes remain pinned. Raw downloads are retained locally and are not included in the manuscript-source archive.

The README supplies the environment and the commands for archive retrieval, rolling evaluation, independent result verification and figure generation. No paid feed, private account or vendor request was used to collect the empirical inputs. Synthetic test fixtures check future-data exclusion, target missingness, decimal identity, member duplication, training-label maturity, provider holdout, nested weights and sparse-calendar uncertainty; they never enter empirical output files.

References

F. M. Bandi and Y. Su. (Early) AI Compute Asset Pricing. *arXiv:2607.12156v4*, 2026. https://arxiv.org/abs/2607.12156v4.

A. C. Cameron and D. L. Miller. A practitioner's guide to cluster-robust inference. *Journal of Human Resources*, 50(2):317–372, 2015. https://doi.org/10.3368/jhr.50.2.317.

dstack. *gpuhunt: GPU prices aggregator for cloud providers.* Public software and versioned catalog infrastructure. https://github.com/dstackai/gpuhunt. Archives accessed October 28, 2026; exact object URLs and checksums are listed in the source manifest.

R. J. Hyndman and G. Athanasopoulos. *Forecasting: Principles and Practice*, third edition. OTexts, 2021. Chapter 5. https://otexts.com/fpp3/toolbox.html.

M. Khan, A. I. Jehangiri, Z. Ahmad, M. A. Ala'anzy, and A. Umer. An exploration to graphics processing unit spot price prediction. *Cluster Computing*, 25:3499–3515, 2022. https://doi.org/10.1007/s10586-022-03581-8.

R. Mittal. *gpu-price-history.* Public reconstruction repository and accompanying manuscript description, 2026. Pinned revision ee8820dd90d7715d8bb57cee03fb0882706d76c5. https://github.com/rahilmittal1/gpu-price-history. Repository-generated data are attributed under CC BY 4.0; original third-party archives retain their own terms.

Verda. DataCrunch is changing its name to Verda. November 5, 2025. https://verda.com/blog/datacrunch-is-changing-its-name-to-verda.