


(a) own-seed test per run: 16 never-trained settings, 60 runs each; x bars: frozen bracket of $R_{\text{own}} (\leq 8.4\text{e-}04)$; per-setting Spearman ρ : 0.76–0.86 at $a = 1.30$, 0.57–0.82 at $a = 1.50$

- $U_{\text{own}}, a = 1.30$: $n = 460$ crossers of 480
- $C_{\text{own}} = 1.0311 R_{\text{own}}$ (fitted), $a = 1.30$
- $U_{\text{own}}, a = 1.50$: $n = 460$ crossers of 480
- $C_{\text{own}} = 1.0660 R_{\text{own}}$ (fitted), $a = 1.50$
- identity

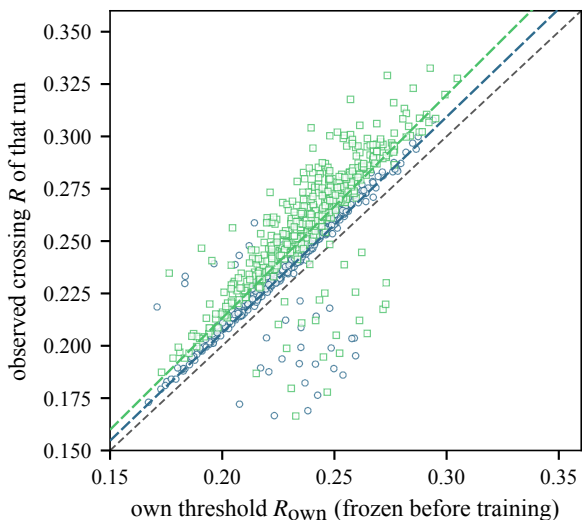

(b) per-run error by model (crossers), 8 windows per a ; window-level bootstrap 95% (10,000 resamples, seed 0); filled: fitted, open: nothing fitted

- U: population R_{glob} (nothing fitted)
- C: $\lambda(a)R_{\text{glob}}$ (λ fitted, Block 3)
- U_{own} : own threshold (nothing fitted)
- C_{own} : $\rho_{\text{res}}(a)R_{\text{own}}$ (fitted)

