


Phase 1: every failure is a placement or a bias failure

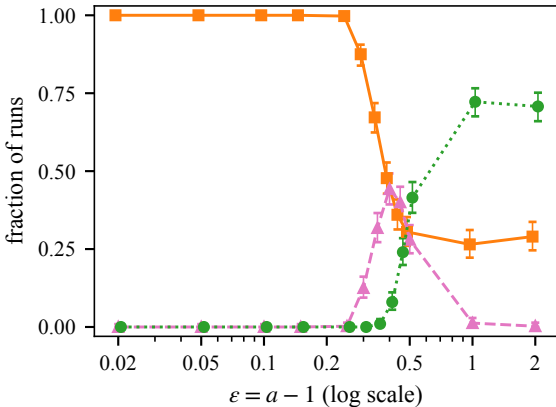

$n = 400$ runs per a (200 seeds $\times$ 2 precisions);
4,800 runs, 0 disagreements with the
solve check; bars: Clopper–Pearson 95%

- placement failure ($G \leq 0$): 3,297 runs
- bias failure ($G > 0$,
 b_2 outside its interval): 633 runs
- solved: 870 runs