M022

Tame/wild collision recovery

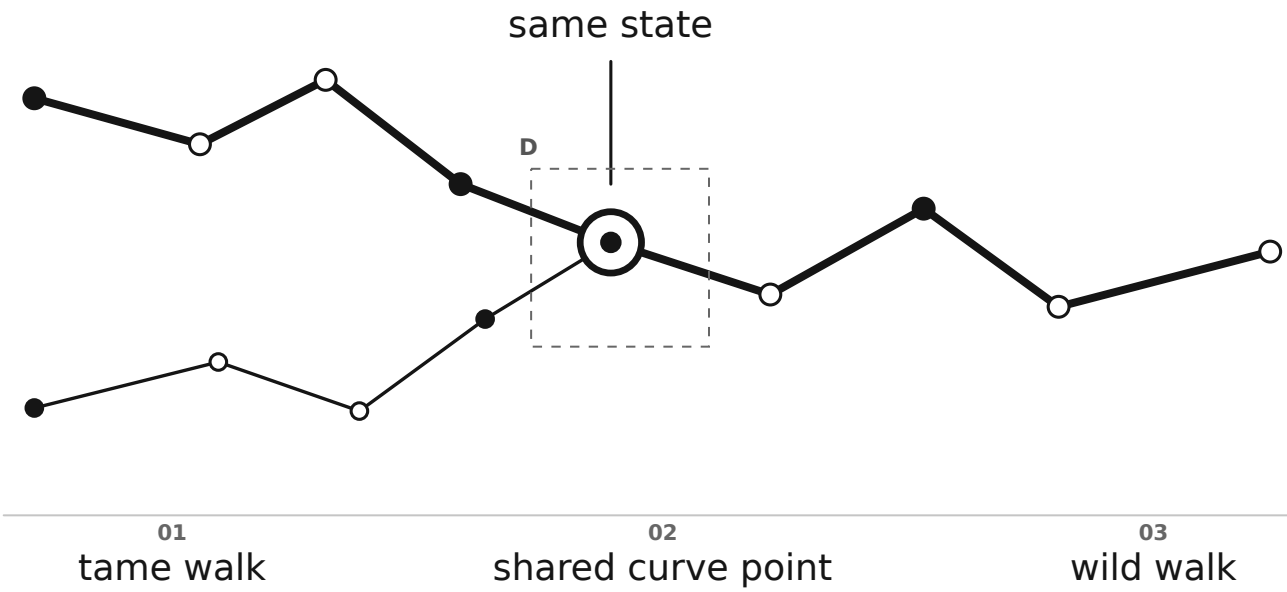

D / OPERATION DETAIL

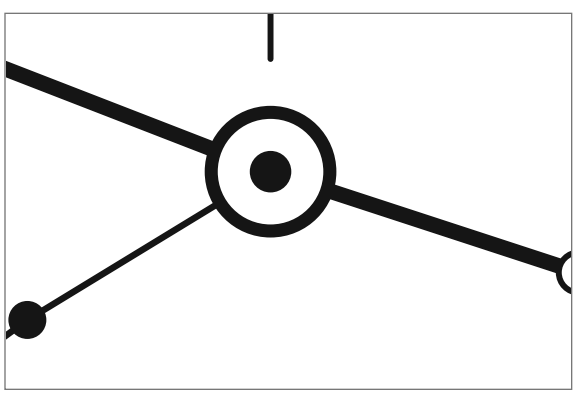

Vector detail / 1.93× main-view scale

HOW THE OPERATION WORKS

A tame walk starts from a known scalar; a wild walk starts from the target point. Their meeting relates recorded distances and yields a candidate scalar.

READ THE THREE STAGES

01 tame walk
02 shared curve point
03 wild walk

WHAT WAS ACTUALLY DONE

collision.py groups same-x entries, tries tame/wild assignments and derives candidates. Because x alone has two point parities, the final scalar must pass exact public-key verification.

ORIGINAL FINDING / IMPLEMENTED

Same-point opposite-herd distances yield a scalar when the walk origins and distances are valid. No real target collision is established here.