M001

Public puzzle corpus verification

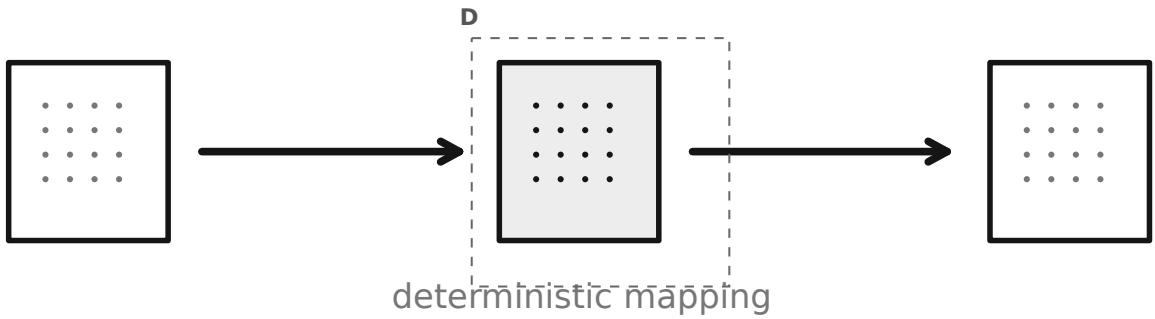

D / OPERATION DETAIL

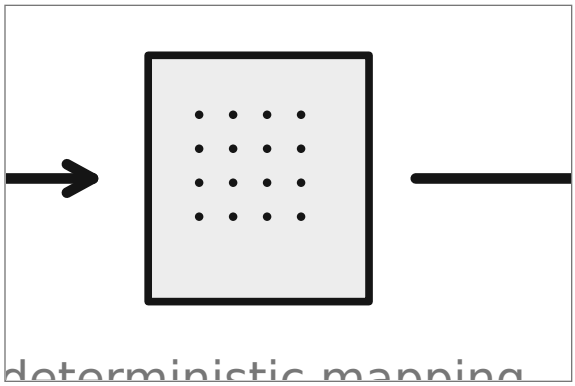

Vector detail / 1.38× main-view scale

HOW THE OPERATION WORKS

A candidate scalar determines a public point and address hash. Recomputing those values detects an incorrect published key or mismatched database row.

READ THE THREE STAGES

01 private scalar
02 public point
03 address hash

WHAT WAS ACTUALLY DONE

Read filled private-key rows, derive the recorded public-key format, and compare with stored point/HASH160 fields. Empty rows remain unknown; passing the check does not discover their keys.

ORIGINAL FINDING / EXECUTED RECORD

Recorded public scalars are checked against secp256k1 points and HASH160; validates the dataset, not a prediction.