M003

Full-range seeded sampling backtests

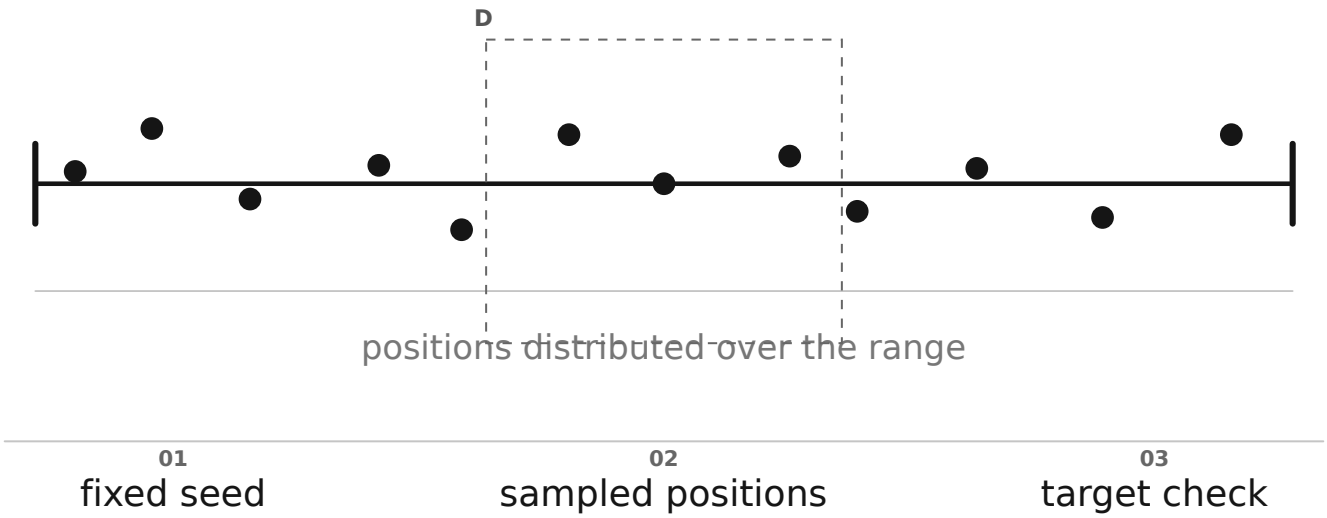

D / OPERATION DETAIL

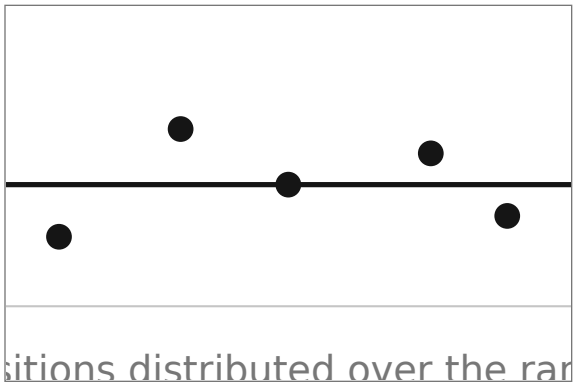

Vector detail / 1.13× main-view scale

HOW THE OPERATION WORKS

A seeded sampler chooses a reproducible order of candidates. The verifier stops when a candidate produces the target address.

READ THE THREE STAGES

01 fixed seed
02 sampled positions
03 target check

WHAT WAS ACTUALLY DONE

Saved subprocess backtests run the actual checker on small solved puzzles and compare recovered values afterward. Counts describe work until a match, not a learned shortcut.

ORIGINAL FINDING / EXECUTED RECORD

Actual address checkers recovered small published puzzles; seeded search order does not establish predictive narrowing.