M011

Incremental public-point verification

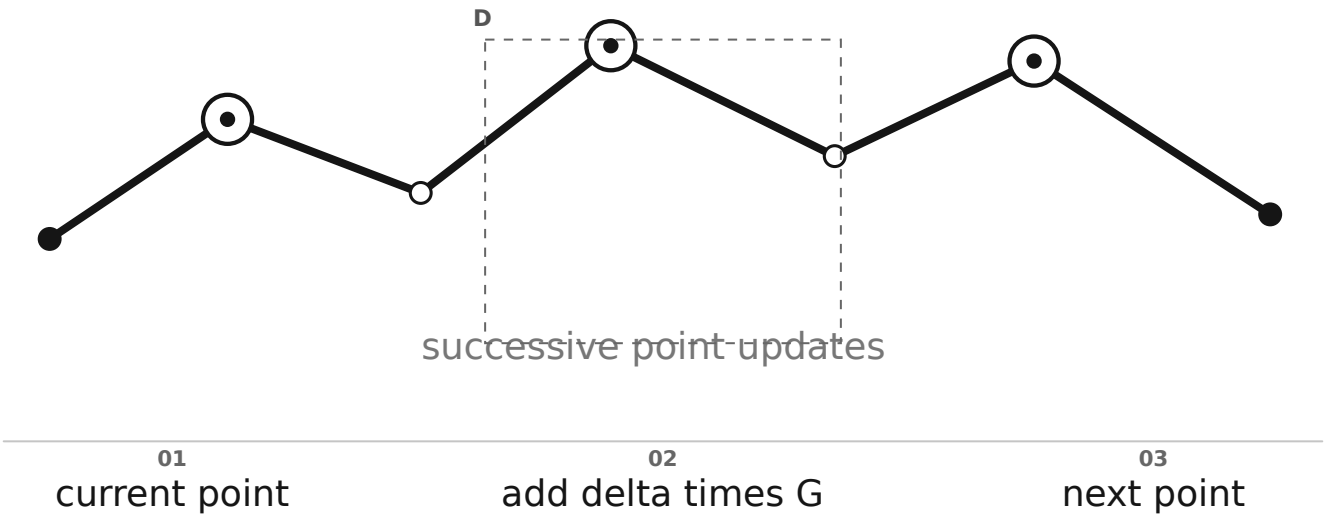

D / OPERATION DETAIL

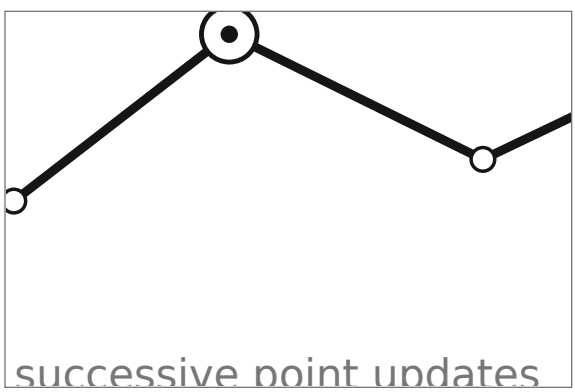

Vector detail / 1.13× main-view scale

HOW THE OPERATION WORKS

If the next scalar differs by delta, its public point is the old point plus delta*G. Reusing that point avoids repeated full scalar multiplication.

READ THE THREE STAGES

01 current point
02 add delta times G
03 next point

WHAT WAS ACTUALLY DONE

point_walk.py caches the two step points needed by the affine traversal, including wraparound. It still serializes and hashes every point; the candidate sequence is unchanged.

ORIGINAL FINDING / EXECUTED RECORD

Same scalar sequence verified using cached point increments; 900 comparison cases and paired benchmarks passed.