M017

32-byte padding and dual-format P2PKH checks

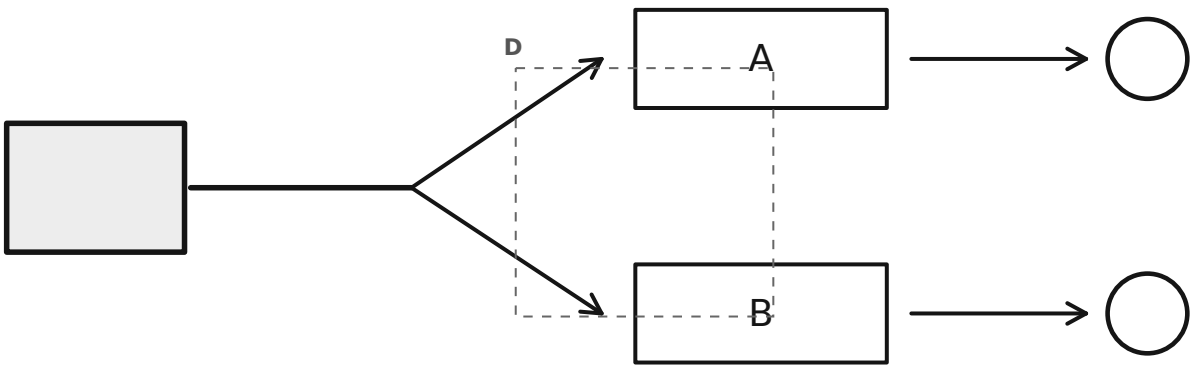

01 32-byte scalar

02 public-key encodings

03 20-byte hash

D / OPERATION DETAIL

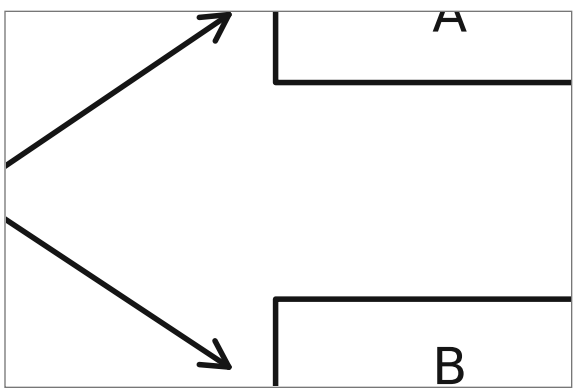

Vector detail / 1.38× main-view scale

HOW THE OPERATION WORKS

A scalar is encoded as exactly 32 big-endian bytes, multiplied by G, serialized and hashed. P2PKH comparisons use the address's decoded 20-byte hash.

READ THE THREE STAGES

01 32-byte scalar
02 public-key encodings
03 20-byte hash

WHAT WAS ACTUALLY DONE

Existing checkers use key.to_bytes(32,'big'), known scalar-one vectors and compressed/uncompressed formats. They compare HASH160 directly rather than Base58-encoding every generated address, an equivalent target check.

ORIGINAL FINDING / EXECUTED RECORD

Left-padded scalar inputs, compressed/uncompressed public keys and known scalar-one address vectors guard verifier correctness.