M021

Binary distinguished-point parsing

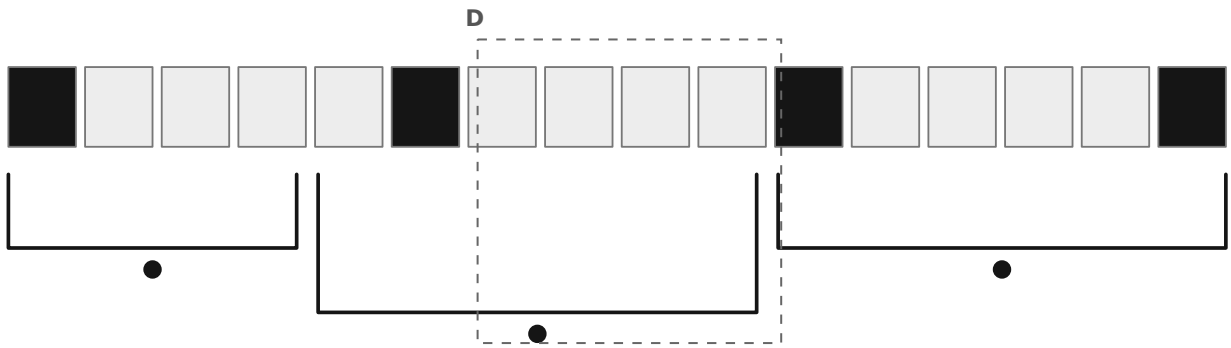

01 binary dump

02 field boundaries

03 point and distance

D / OPERATION DETAIL

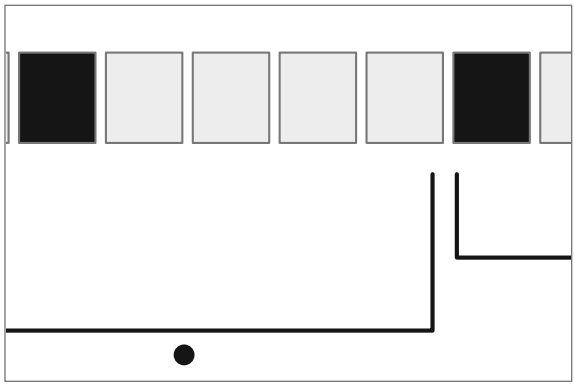

Vector detail / 1.13× main-view scale

HOW THE OPERATION WORKS

Distinguished-point dumps encode selected curve points and possibly walk distances. Recovering their layout is necessary before collision algebra has meaning.

READ THE THREE STAGES

01 binary dump
02 field boundaries
03 point and distance

WHAT WAS ACTUALLY DONE

The parser scans bit/byte layouts, checks candidate x-coordinates and extracts metadata slices. Later scripts test interpretations; a parseable integer is not automatically a valid walk distance.

ORIGINAL FINDING / EXECUTED RECORD

Extract curve x-coordinates, candidate metadata and distance fields from the supplied binary. Interpretation of metadata remains a hypothesis.