M023

Single-process bounded Pollard kangaroo

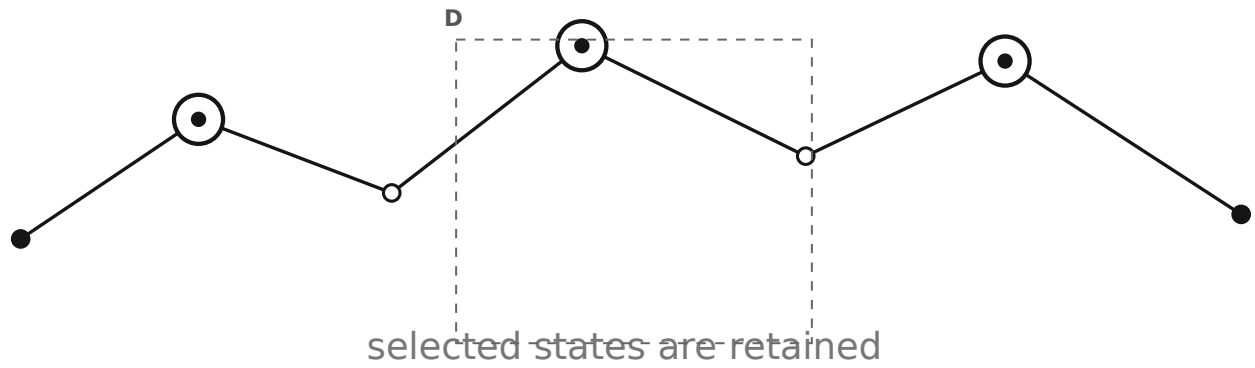

01 bounded interval

02 deterministic jumps

03 distinguished points

D / OPERATION DETAIL

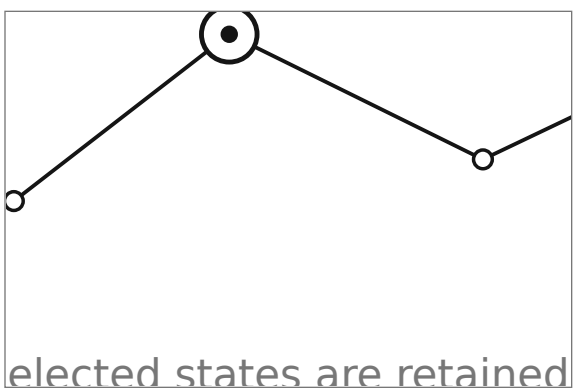

Vector detail / 1.13× main-view scale

HOW THE OPERATION WORKS

Pollard kangaroo uses deterministic pseudo-random jumps so tame and wild walks can merge. Distinguished points reduce the amount of stored walk data.

READ THE THREE STAGES

01 bounded interval
02 deterministic jumps
03 distinguished points

WHAT WAS ACTUALLY DONE

kangaroo.py implements bounded CPU walks, jump tables, point selection and verification. It requires the target public point and a budget; an address hash cannot initialize its wild walk.

ORIGINAL FINDING / IMPLEMENTED

Standard interval discrete-log implementation for targets with known public points.