M031

Rust native herd stepping

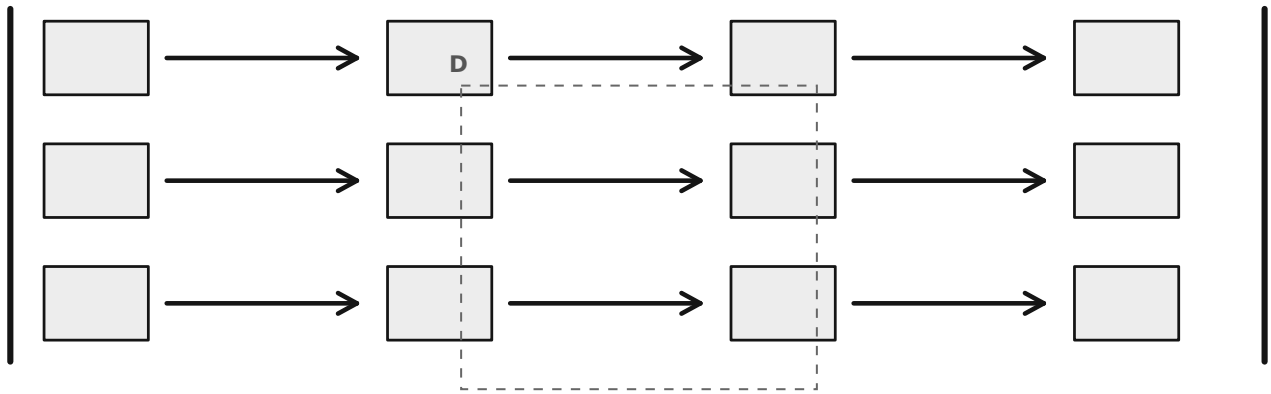

01 native walk loop

02 compiled herd steps

03 same search rule

D / OPERATION DETAIL

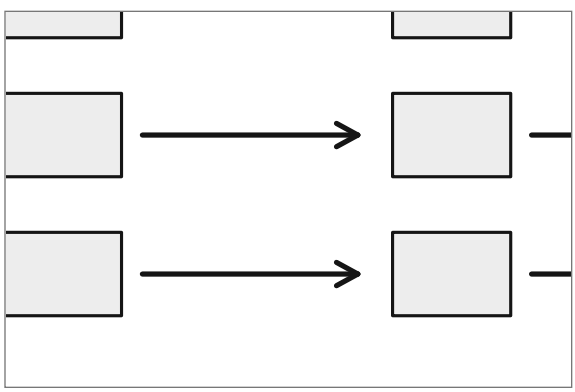

Vector detail / 1.13× main-view scale

HOW THE OPERATION WORKS

Move repeated curve-walk operations out of the Python interpreter into compiled native code. The mathematical search remains the same.

READ THE THREE STAGES

01 native walk loop
02 compiled herd steps
03 same search rule

WHAT WAS ACTUALLY DONE

The Rust extension provides herd stepping and native lookup operations called by the Python runtime. Actual speed must come from a build-specific benchmark, not merely the presence of Rust source.

ORIGINAL FINDING / IMPLEMENTED

Native backend reduces interpreter overhead while preserving interval-search semantics.