M038
Cubic scalar decomposition

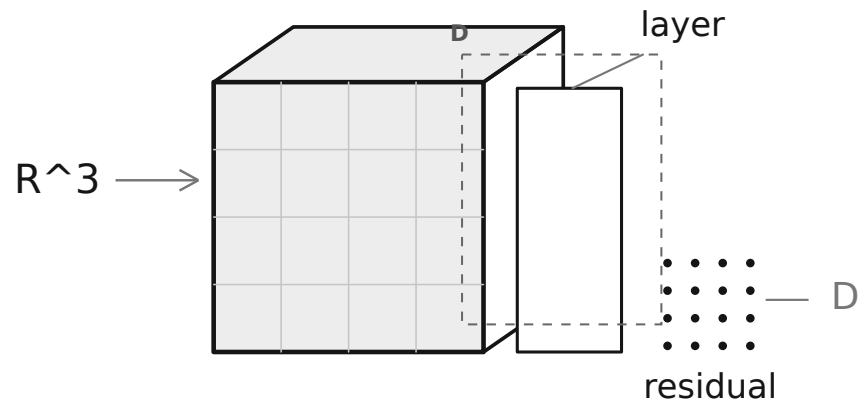

01	02	03
original scalar	cube + layer	residual

D / OPERATION DETAIL

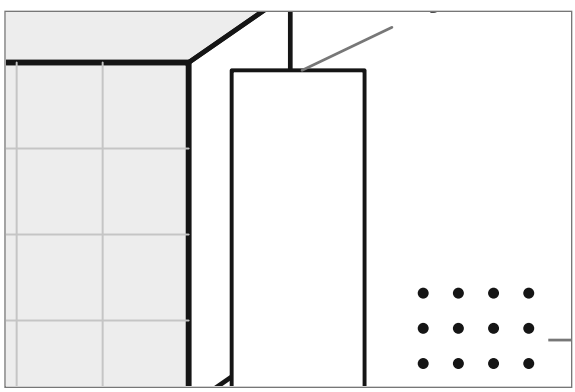

Vector detail / 1.27× main-view scale

HOW THE OPERATION WORKS

Set R1=floor(cuberoot(k)), divide k-R1^3 by R1^2, and retain quotient C1 and remainder D1. This exactly re-encodes k.

READ THE THREE STAGES

01 original scalar
02 cube + layer
03 residual

WHAT WAS ACTUALLY DONE

The code reconstructs known scalars from those digits and checks bounds. For an unknown key the digits are also unknown; an exact identity does not disclose them from the address.

ORIGINAL FINDING / AUDITED/CORRECTED

Exact reconstruction of known integers works; the representation itself supplies no unknown digits or entropy reduction.