## M039

# Five-level R1/R2/S3/S4/S5 tower

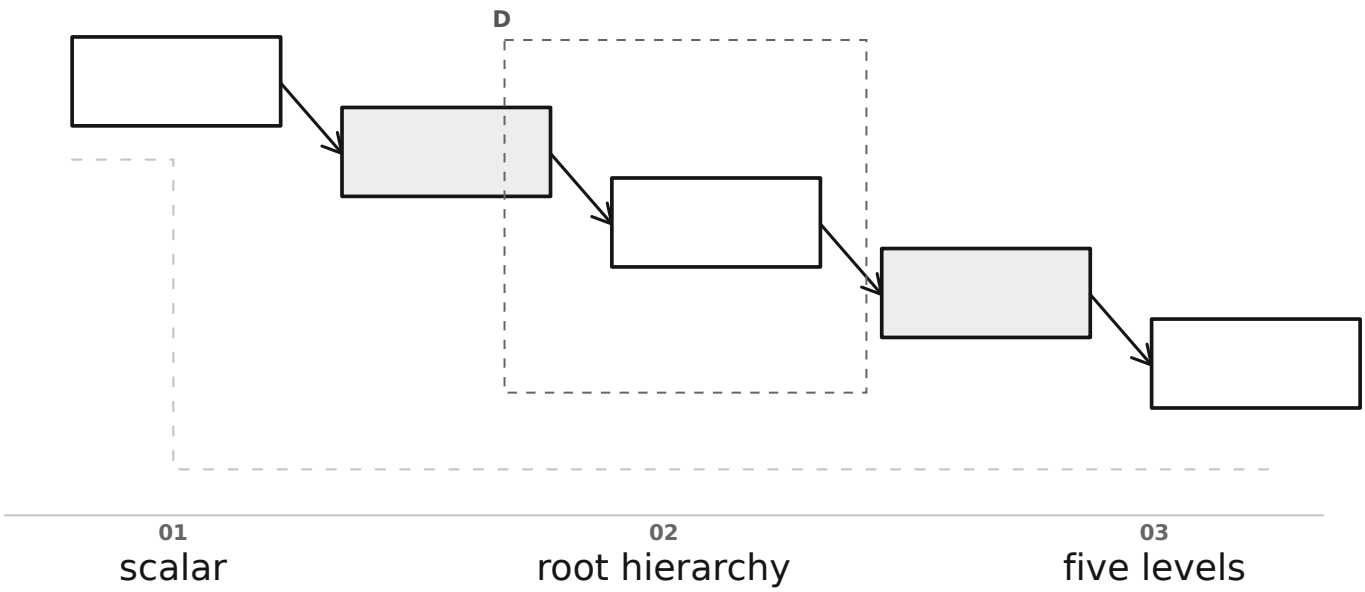


### D / OPERATION DETAIL

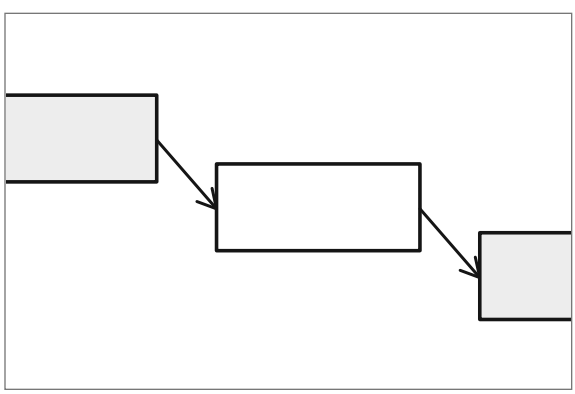

Vector detail / 0.98× main-view scale

### HOW THE OPERATION WORKS

Reapply root/division decompositions to R1 and later components, producing a hierarchy of smaller coordinates.

#### READ THE THREE STAGES

**01** scalar
**02** root hierarchy
**03** five levels

### WHAT WAS ACTUALLY DONE

The tower code computes R2 and S-level quantities, some from bit-length formulas. Its tables describe known-key coordinates or target-size anchors, not independently observed secret digits.

### ORIGINAL FINDING / IMPLEMENTED

Recursive roots and coefficients organize scalar coordinates; high levels often depend only on advertised bit width.