M041
Phase-2 Delta2 enumeration

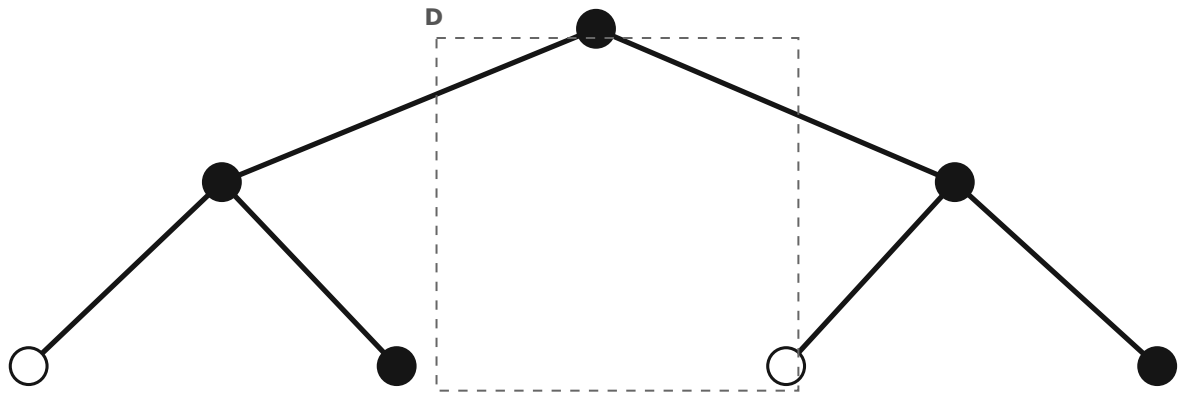

01 R2 and C2

02 Delta2 sweep

03 possible R1 values

D / OPERATION DETAIL

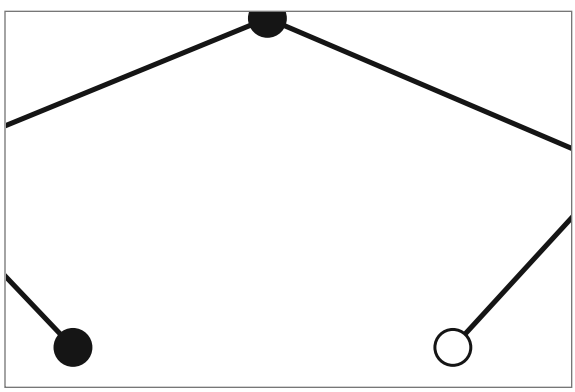

Vector detail / 0.98× main-view scale

HOW THE OPERATION WORKS

Given R2 and C2, each Delta2 selects an R1 through R1=R2^3+C2*R2^2+Delta2.

READ THE THREE STAGES

01 R2 and C2

02 Delta2 sweep

03 possible R1 values

WHAT WAS ACTUALLY DONE

Phase-2 routines compute feasible Delta2 bounds and enumerate or stride through them. The smaller-looking parameter still represents many distinct scalar bases that may each require a D1 search.

ORIGINAL FINDING / IMPLEMENTED

Enumerate feasible R1 values within each R2/C2 hypothesis; this is a search coordinate, not an independently observed point.