M061

Correct uniform null for ninth-root clustering

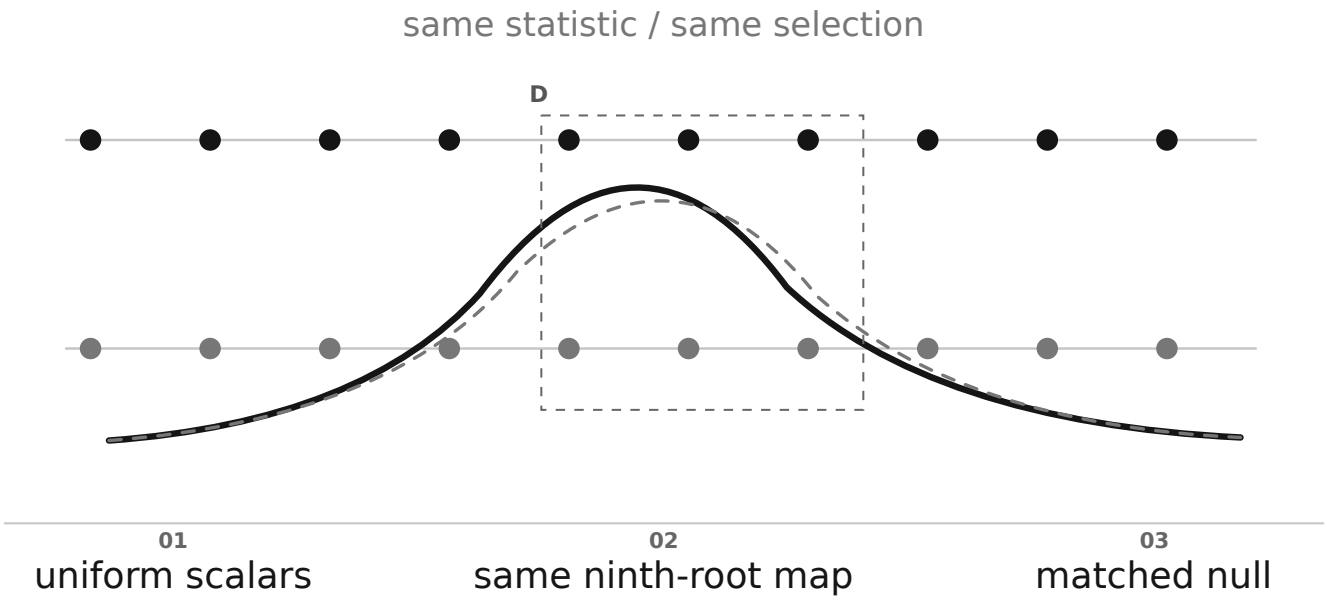

D / OPERATION DETAIL

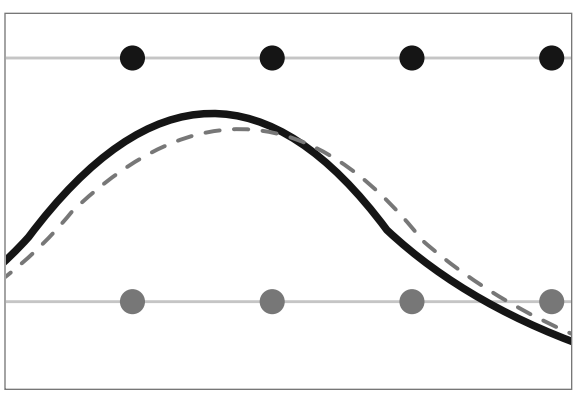

Vector detail / 1.17× main-view scale

HOW THE OPERATION WORKS

Transform uniform random scalars through the same ninth-root map as the real keys before comparing clustering.

READ THE THREE STAGES

01 uniform scalars
02 same ninth-root map
03 matched null

WHAT WAS ACTUALLY DONE

The chat-audit experiment derives the transformed baseline and simulates matched-bit-width keys. It corrects an earlier null that mistakenly treated the compressed root coordinate as nearly uniform.

ORIGINAL FINDING / AUDITED/CORRECTED

Uniform scalars naturally cluster after ninth-root transformation; an earlier overly broad null standard deviation was corrected.