M071

R2 intervals as conditional search prioritization

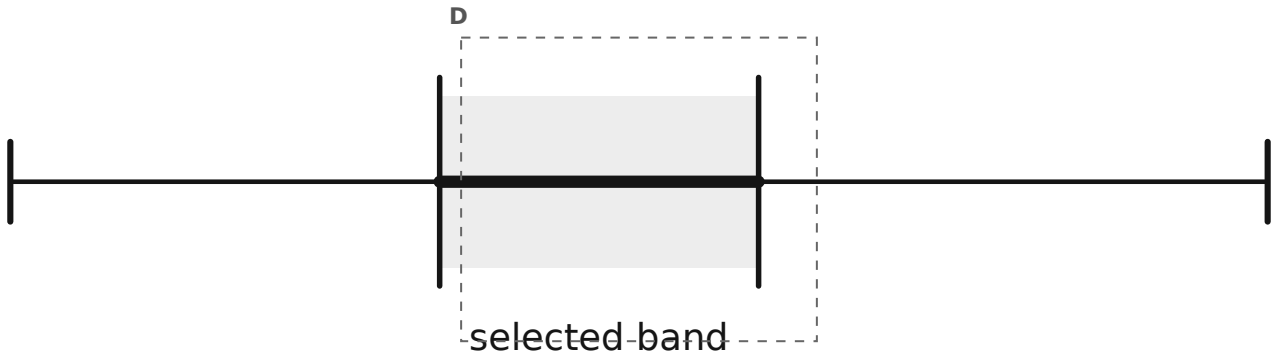

01
R2 root band

02
map bucket boundaries

03
conditional scalar range

D / OPERATION DETAIL

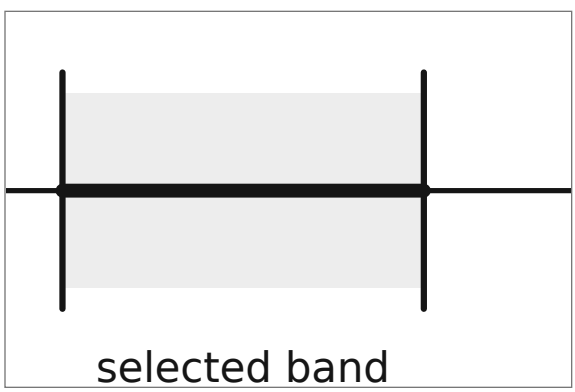

Vector detail / 1.13× main-view scale

HOW THE OPERATION WORKS

A root band [a,b] corresponds exactly to scalars from a^9 through (b+1)^9-1, clipped to puzzle bounds.

READ THE THREE STAGES

01 R2 root band
02 map bucket boundaries
03 conditional scalar range

WHAT WAS ACTUALLY DONE

Interval-analysis scripts export these regions and report held-out coverage. The conversion is exact, but whether the unknown target belongs to the forecast band remains a probabilistic hypothesis.

ORIGINAL FINDING / EXECUTED RECORD

Root forecast bands map to exact scalar intervals; reports distinguish conditional narrowing from guaranteed coverage and statistical advantage.