M080

Gap-fill log-key and raw-offset interpolation

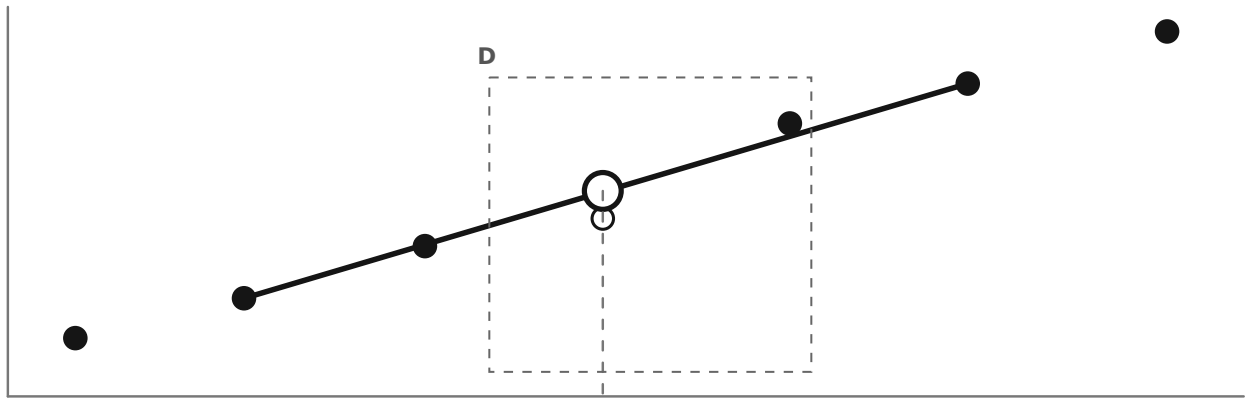

01 neighbor key values

02 log-key / raw offset

03 gap estimate

D / OPERATION DETAIL

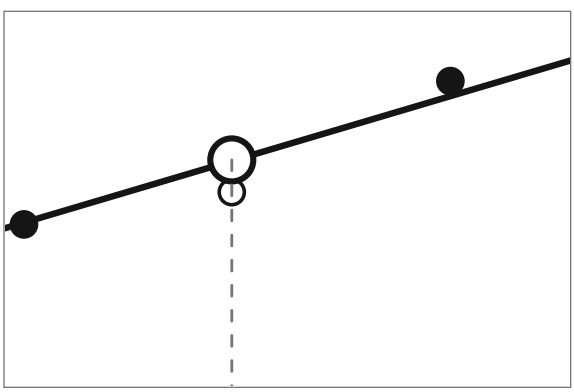

Vector detail / 1.17× main-view scale

HOW THE OPERATION WORKS

Interpolate log2(key) or the raw ninth-root residual as an alternative notion of smooth progression.

READ THE THREE STAGES

01 neighbor key values

02 log-key / raw offset

03 gap estimate

WHAT WAS ACTUALLY DONE

The same bounded test reconstructs scalars under these assumptions and compares addresses. Log closeness or matching early values is not accepted as a recovered key.

ORIGINAL FINDING / EXECUTED RECORD

Alternative smoothness assumptions tested against exact address hashes, not judged by numerical proximity alone.