M089

Two-adic/Hensel polynomial recurrence

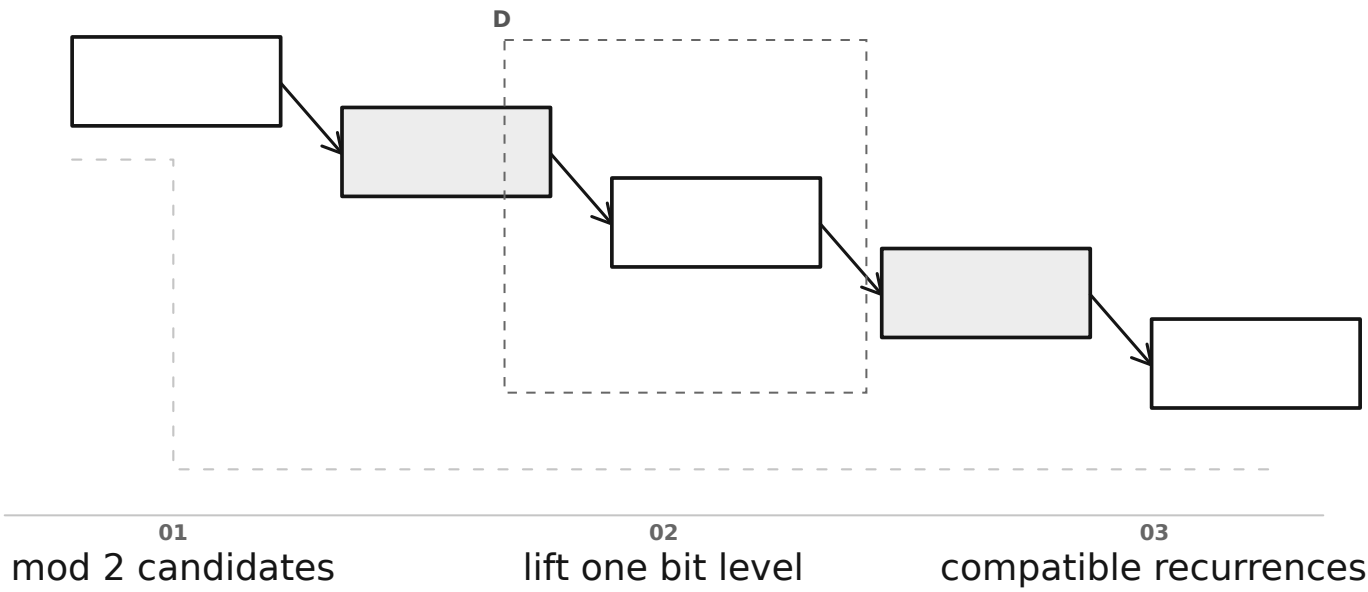

D / OPERATION DETAIL

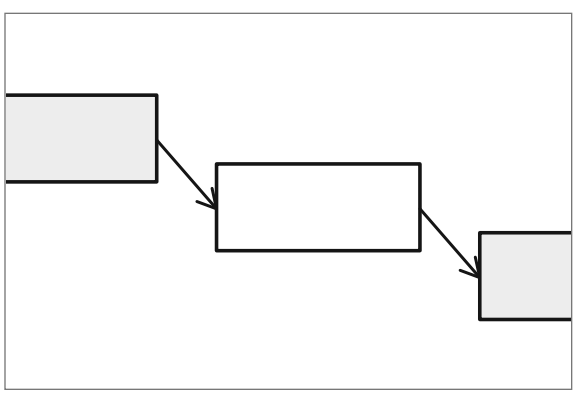

Vector detail / 0.98× main-view scale

HOW THE OPERATION WORKS

A polynomial recurrence modulo powers of two can constrain parameters one bit at a time; lifting extends compatible low-bit solutions.

READ THE THREE STAGES

01 mod 2 candidates
02 lift one bit level
03 compatible recurrences

WHAT WAS ACTUALLY DONE

The generator catalog tests declared polynomial/2-adic forms against known puzzle transitions. It searches a restricted family, not all possible deterministic key generators.

ORIGINAL FINDING / RECORDED RESEARCH

Tests of squared-state and modular recurrence hypotheses are archived; finite failures are not impossibility theorems.