M100

CLI fingerprint and key clustering

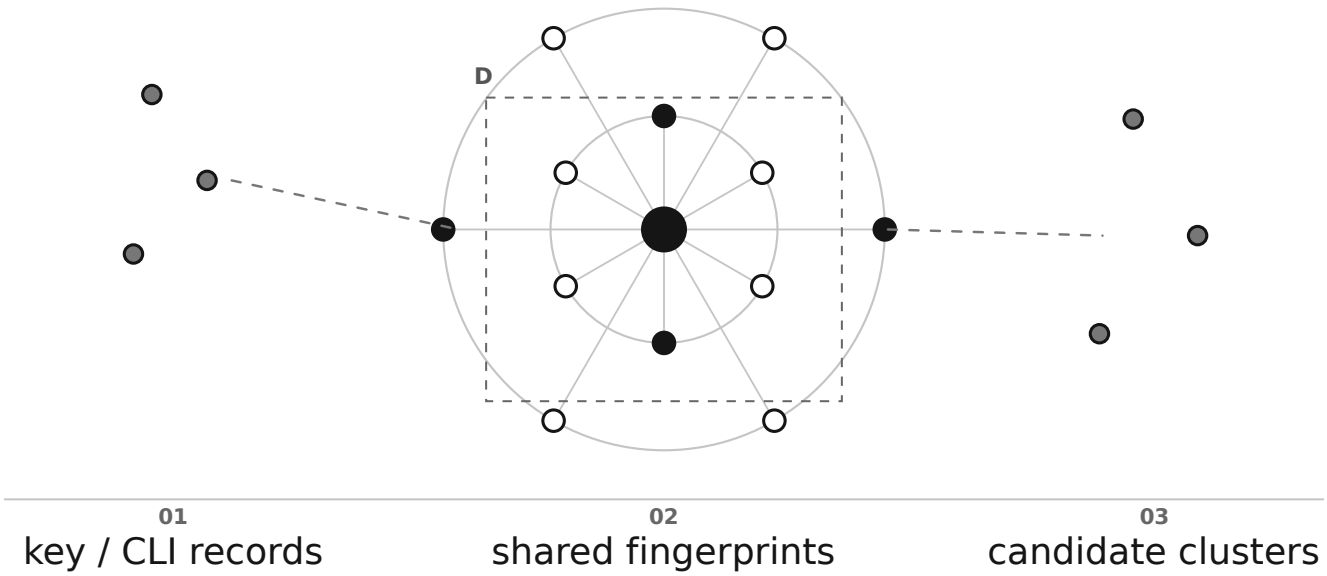

D / OPERATION DETAIL

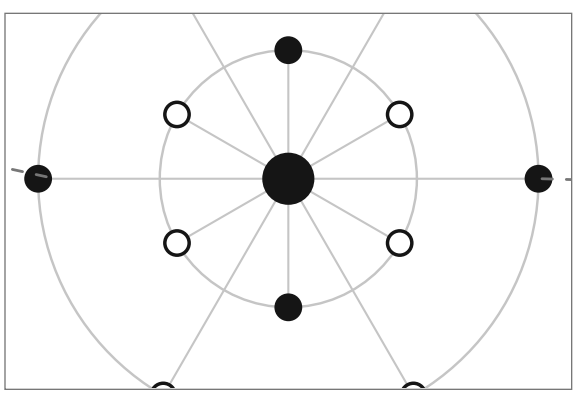

Vector detail / 1.13× main-view scale

HOW THE OPERATION WORKS

A short fingerprint of known components can group similar CLI outputs or candidate tuples. It helps organize evidence and detect duplicate hypotheses.

READ THE THREE STAGES

01 key / CLI records
02 shared fingerprints
03 candidate clusters

WHAT WAS ACTUALLY DONE

set_bits.py and clustering tools compute partial masks, Hamming statistics and groups. A matching fingerprint is a lossy summary, not proof of an exact scalar or valid search cut.

ORIGINAL FINDING / EXECUTED RECORD

Hamming, low-word masks and partial fingerprints organize known coordinates; not established target narrowing.