M116

Original HP-RTE weighted shard sampling

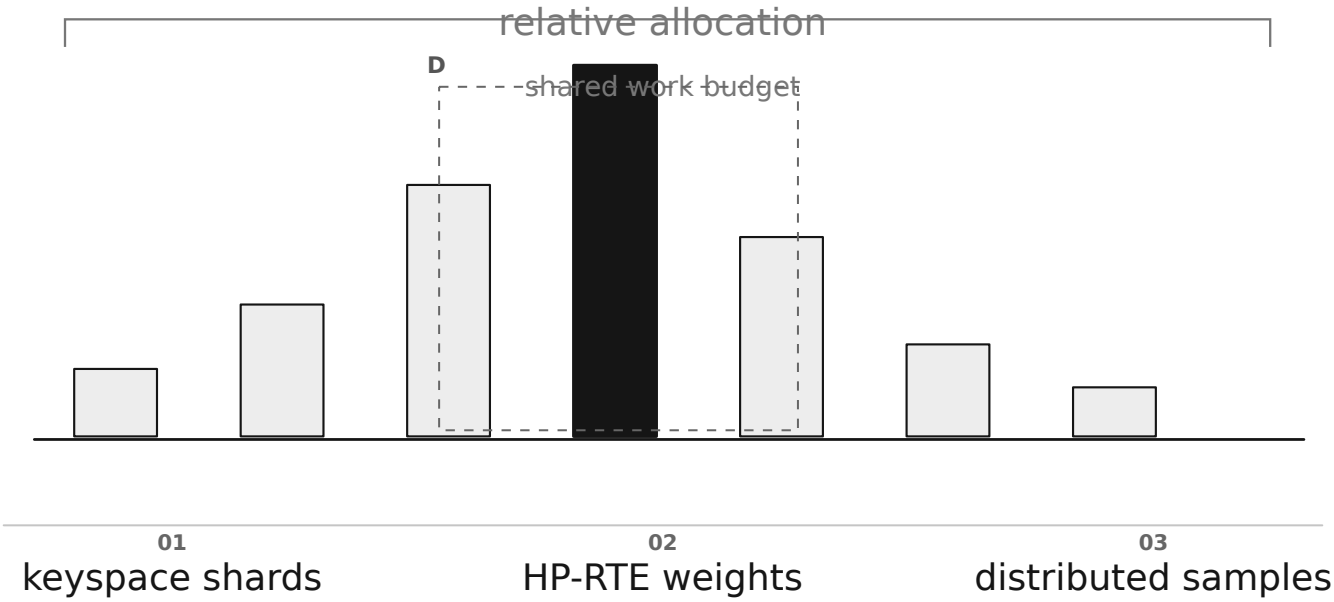

D / OPERATION DETAIL

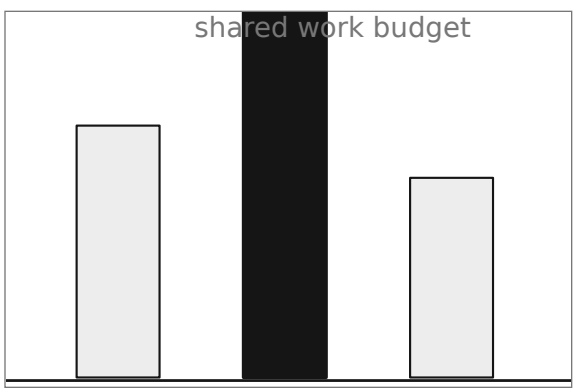

Vector detail / 1.00× main-view scale

HOW THE OPERATION WORKS

The original recipe samples a key, derives a byte/nibble label and uses its assigned weight to move the output into a biased subrange.

READ THE THREE STAGES

01 keyspace shards
02 HP-RTE weights
03 distributed samples

WHAT WAS ACTUALLY DONE

Historical code uses floating-point offsets, and successive versions exclude different parts of the interval. The repaired generator removes that unsupported exclusion and uses exact integer sampling.

ORIGINAL FINDING / AUDITED/CORRECTED

Historical float-based biased generator excludes part of the advertised interval; corrected pipeline uses full-support integer partitions.