M117

Two-byte rotation and four-hex-tree claims

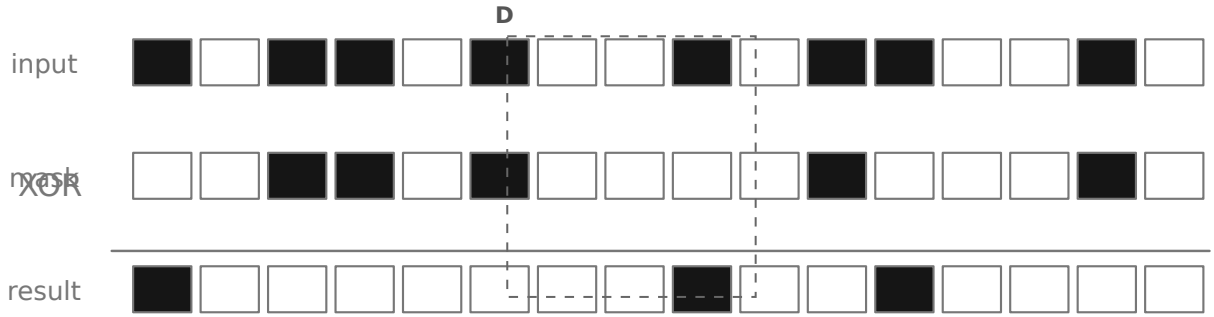

01 two-byte state

02 rotate bytes

03 claimed four-hex tree

D / OPERATION DETAIL

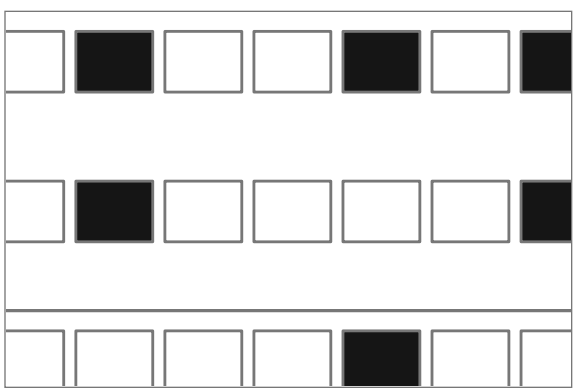

Vector detail / 1.32× main-view scale

HOW THE OPERATION WORKS

Rotate a byte string to change which byte is inspected. A genuine four-hex tree would also define branching and traversal over four hex digits.

READ THE THREE STAGES

01 two-byte state
02 rotate bytes
03 claimed four-hex tree

WHAT WAS ACTUALLY DONE

The supplied generator rotates by two bytes, not two hex characters. Its tree-depth name is not used to implement the claimed tree partitioning.

ORIGINAL FINDING / AUDITED/CORRECTED

Rotation exists, but original tree-depth configuration did not implement the claimed tree search.