M126

Double-AP and RamseyScript subset claims

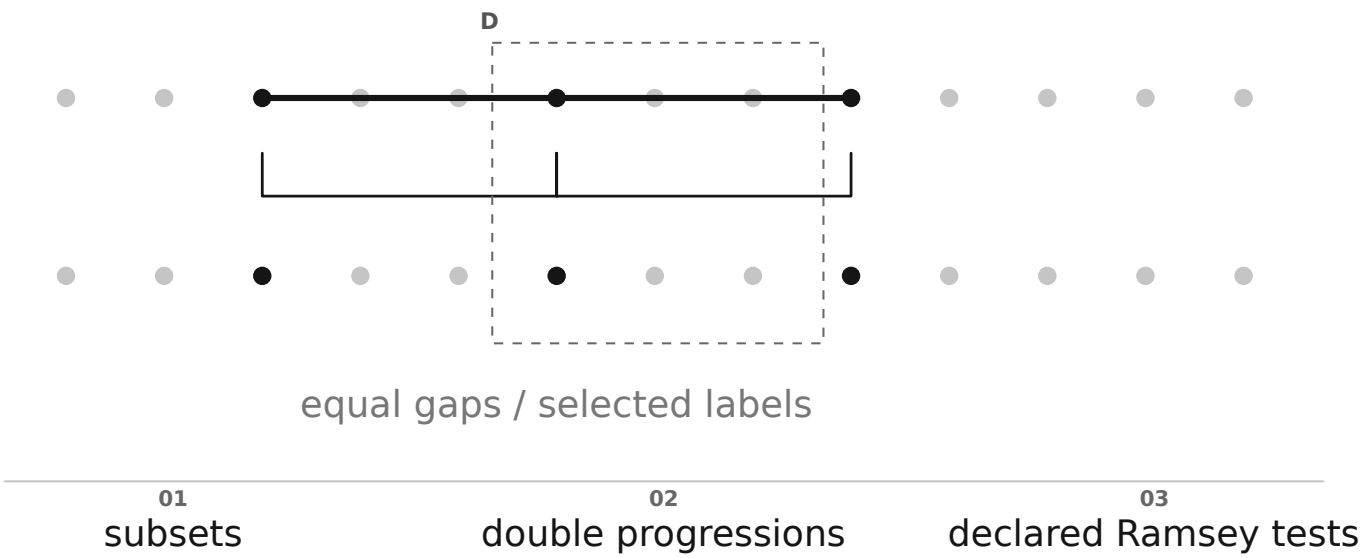

D / OPERATION DETAIL

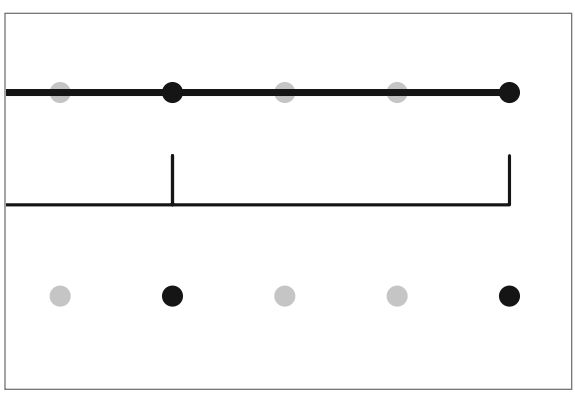

Vector detail / 1.14× main-view scale

HOW THE OPERATION WORKS

Ramsey search recursively extends combinatorial objects while rejecting forbidden structures; a faithful interpreter must implement the specified objects and filter semantics.

READ THE THREE STAGES

01 subsets
02 double progressions
03 declared Ramsey tests

WHAT WAS ACTUALLY DONE

The historical class lacks a real parser and uses an unrelated parity placeholder for double APs. Its general k-AP detector can accept an incomplete progression; later versions repair only some defects.

ORIGINAL FINDING / AUDITED/CORRECTED

Historical code uses placeholders and incomplete language semantics; original filter claims do not establish a cryptographic advantage.