M140

Early coinbase signature harvesting

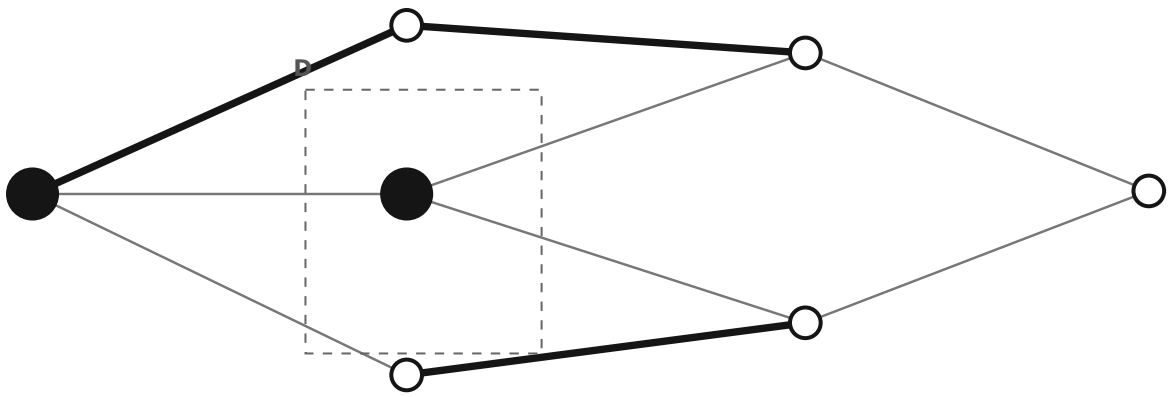

01 early outputs

02 spending signatures

03 collect records

D / OPERATION DETAIL

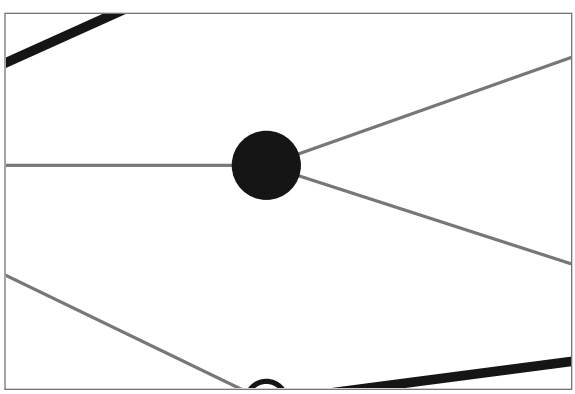

Vector detail / 1.30× main-view scale

HOW THE OPERATION WORKS

Extract signature data from spent early coinbase outputs and identify the signer/public point needed for nonce analysis.

READ THE THREE STAGES

01 early outputs
02 spending signatures
03 collect records

WHAT WAS ACTUALLY DONE

Harvesters follow actual spends, parse signatures and group them for reuse/target-r tests. The saved 51-signature sample provides data, not previously unknown recovered wallet keys.

ORIGINAL FINDING / EXECUTED RECORD

Saved report records 51 signatures and no nonce-reuse recovery; the graph is a data source, not a solve.