M142

BTCparser sleeping/whale sweep signatures

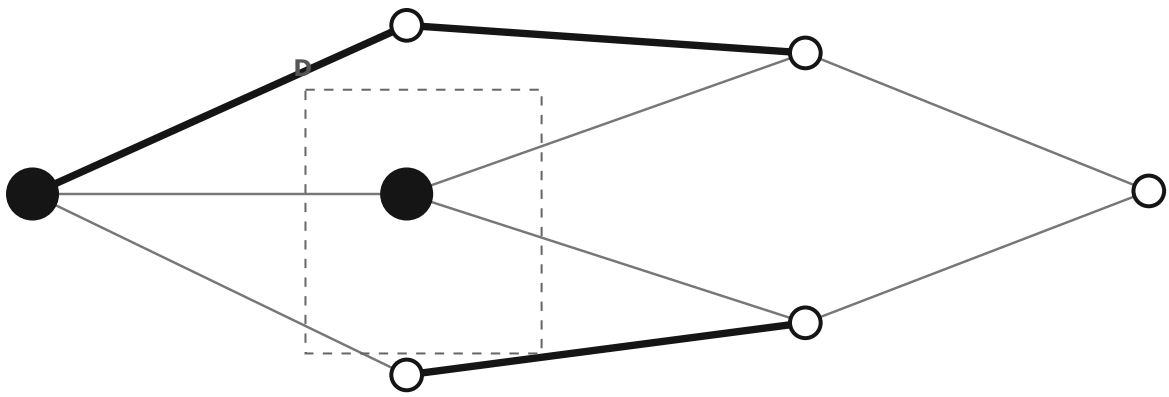

01	02	03
old / whale sweeps	transaction graph	extract signatures

D / OPERATION DETAIL

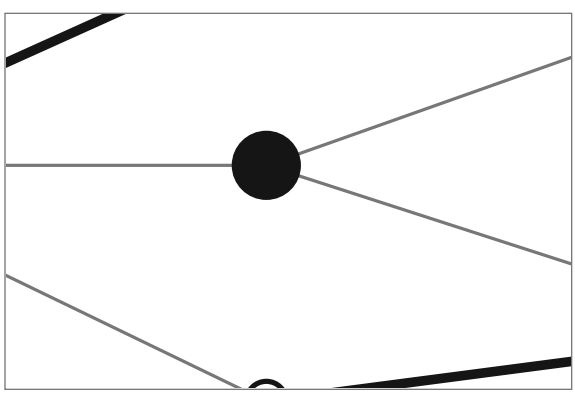

Vector detail / 1.30× main-view scale

HOW THE OPERATION WORKS

Use sleeping-address or whale-sweep indexes to select transactions likely to contain useful signature collections.

READ THE THREE STAGES

01 old / whale sweeps
02 transaction graph
03 extract signatures

WHAT WAS ACTUALLY DONE

The BTCparser sweep parses indexed blocks and selected spend transactions, then tests collected r values. It is a bounded data-gathering strategy, not evidence of biased nonces.

ORIGINAL FINDING / EXECUTED RECORD

Saved sweep harvested 151 signatures with no reuse groups or target-r hits in that sample.