M143

Lattice-candidate sufficiency scan

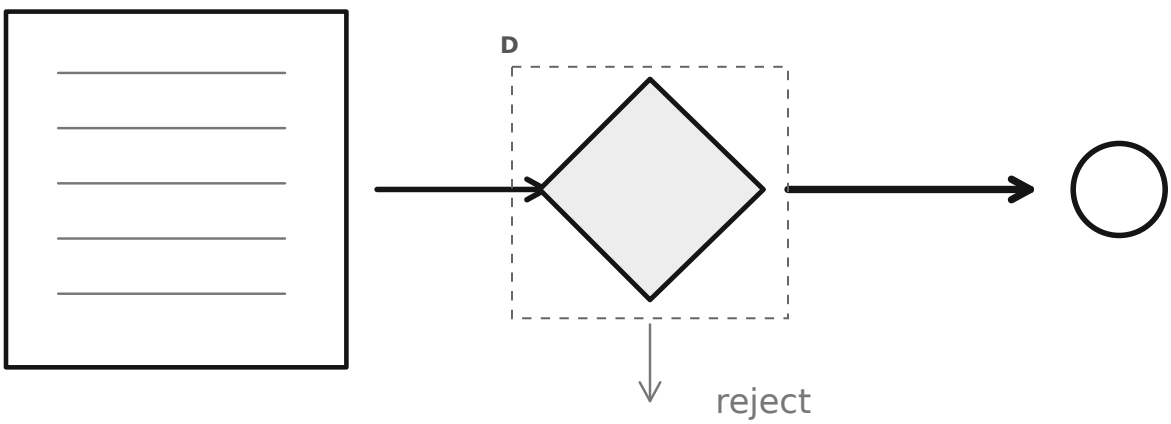

01 per-public-key corpus

02 nonce-data sufficiency

03 lattice eligibility

D / OPERATION DETAIL

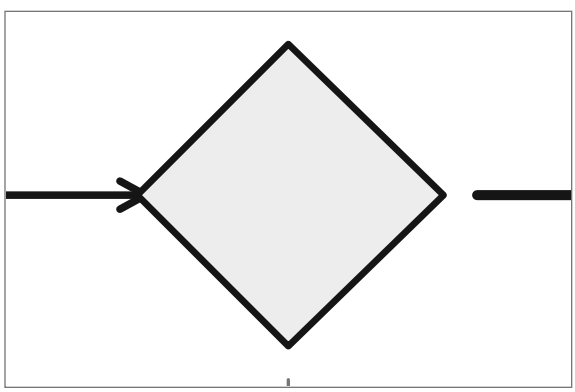

Vector detail / 1.37× main-view scale

HOW THE OPERATION WORKS

Count usable signatures per signer before attempting attacks that require repeated nonce information or leakage.

READ THE THREE STAGES

01 per-public-key corpus
02 nonce-data sufficiency
03 lattice eligibility

WHAT WAS ACTUALLY DONE

The lattice-candidate report groups 184 signatures into wallets and finds none meeting its multi-signature threshold. No target lattice recovery is performed simply by detecting that data are insufficient.

ORIGINAL FINDING / EXECUTED RECORD

Saved report has 184 signatures but no wallet with the required multi-signature count; no lattice recovery executed.