M144

SegWit/testnet target-r scans

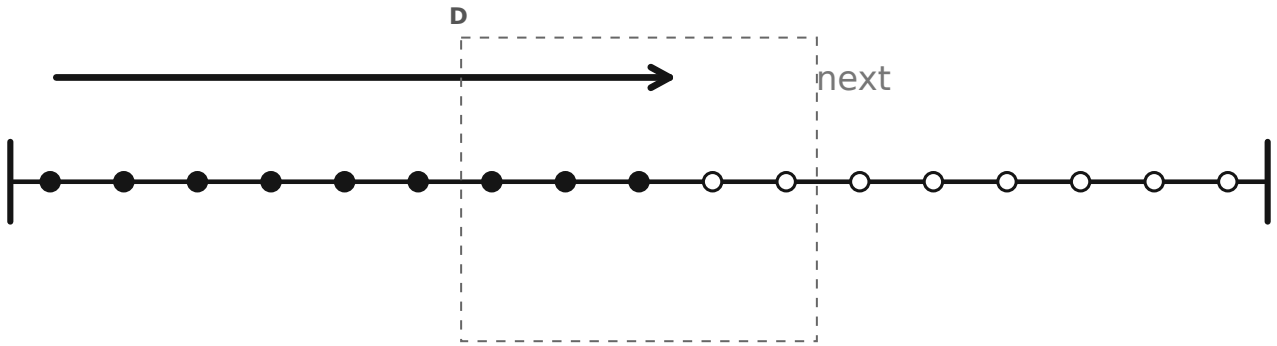

01 witness / testnet data

02 target-r comparison

03 matching records

D / OPERATION DETAIL

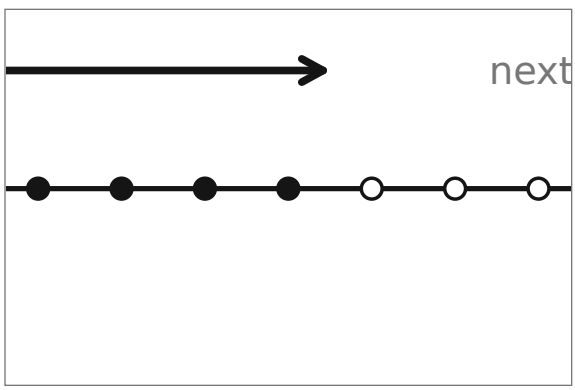

Vector detail / 1.13× main-view scale

HOW THE OPERATION WORKS

Search additional witness and testnet signature data for the same nonce x-coordinate or related target public material.

READ THE THREE STAGES

01 witness / testnet data

02 target-r comparison

03 matching records

WHAT WAS ACTUALLY DONE

Dedicated scans compare parsed r values in their fetched samples. Matching a signature field would need scheme and signer verification; absence in a sample is not a global chain proof.

ORIGINAL FINDING / EXECUTED RECORD

Search archived alternate-chain and witness signatures for the manual-nonce x-coordinate; finite scan scope only.