M145

Signed-message and fork public-key leaks

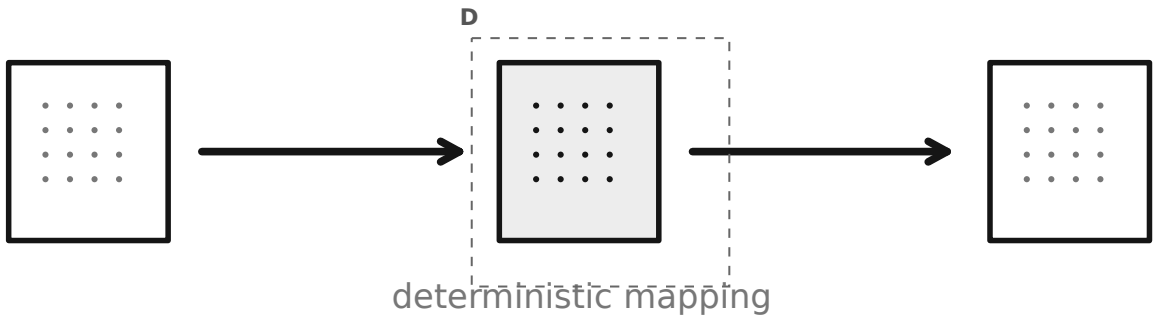

01	02	03
message / fork spend	signature verification	revealed public point

D / OPERATION DETAIL

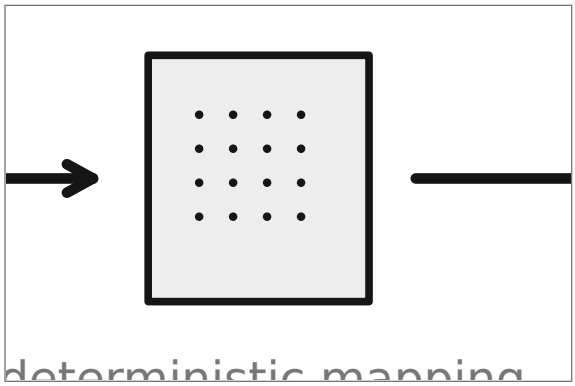

Vector detail / 1.38× main-view scale

HOW THE OPERATION WORKS

Extra signed messages or fork spends may reveal a public point or an independently usable signature absent from the current target record.

READ THE THREE STAGES

01 message / fork spend
02 signature verification
03 revealed public point

WHAT WAS ACTUALLY DONE

Search scripts look for that public material. They do not obtain private keys from a public-point leak alone; they may only enable a different, still expensive recovery method.

ORIGINAL FINDING / IMPLEMENTED

Search additional public signature/pubkey material; utility depends on finding independently applicable data.