M147

DP x-coordinates as candidate public keys

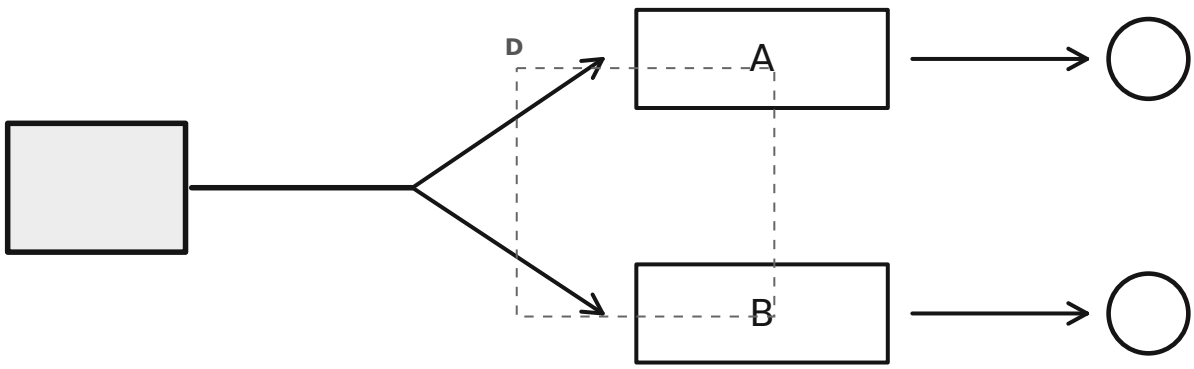

01 candidate x value

02 two possible y lifts

03 compressed public keys

D / OPERATION DETAIL

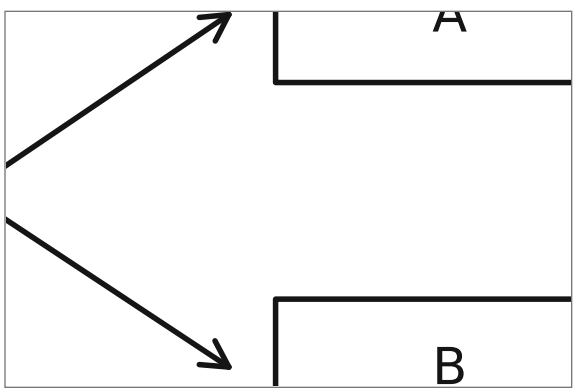

Vector detail / 1.38× main-view scale

HOW THE OPERATION WORKS

A valid x-coordinate has up to two curve-point lifts, each yielding a possible compressed public key and address hash.

READ THE THREE STAGES

01 candidate x value
02 two possible y lifts
03 compressed public keys

WHAT WAS ACTUALLY DONE

The binary audit checks both parities against puzzle targets. This tests whether the dump literally contains the target public key, not whether arbitrary points can be inverted into scalars.

ORIGINAL FINDING / EXECUTED RECORD

Both point parities were checked against puzzle addresses; no match in the recorded binary sample.