M164

Profanity incremental offset grinding

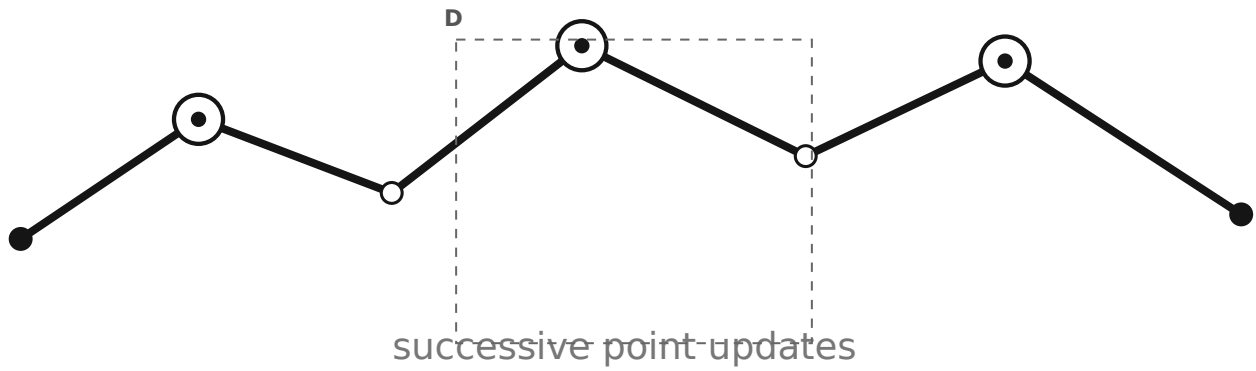

01	02	03
weak base point	add G repeatedly	incremental candidates

D / OPERATION DETAIL

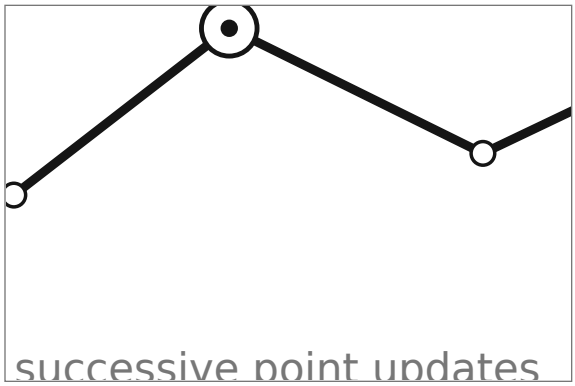

Vector detail / 1.13× main-view scale

HOW THE OPERATION WORKS

Starting from a reconstructed weak base key, add small scalar offsets and reuse point additions to check nearby vanity-search states efficiently.

READ THE THREE STAGES

01 weak base point
02 add G repeatedly
03 incremental candidates

WHAT WAS ACTUALLY DONE

The branch adds offset-window flags and remote sharding scripts. Its documentation explicitly separates Python-side tests from real-GPU compile/verification that was still outstanding there.

ORIGINAL FINDING / BRANCH/IMPLEMENTATION

Extends base keys with small scalar offsets. Branch notes explicitly say real-GPU compile/verification was not yet done there.