M165

Java util.Random replay

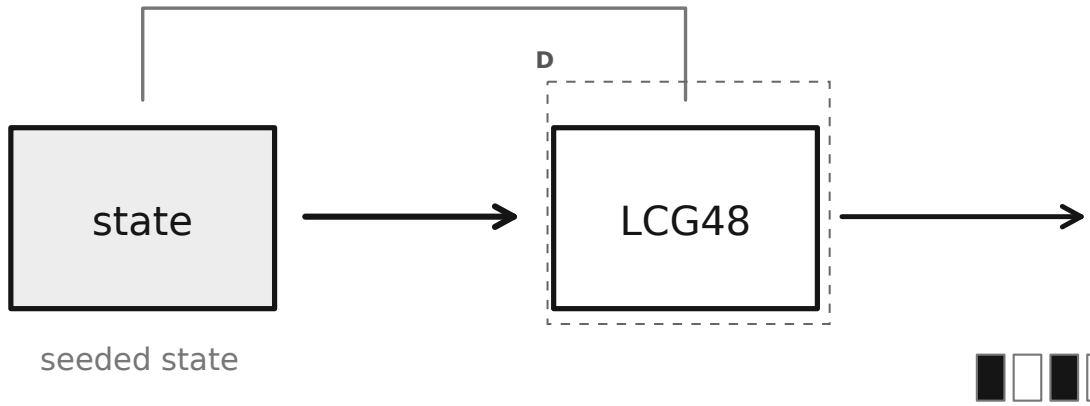

01	02	03
48-bit Java state	LCG updates	nextBytes stream

D / OPERATION DETAIL

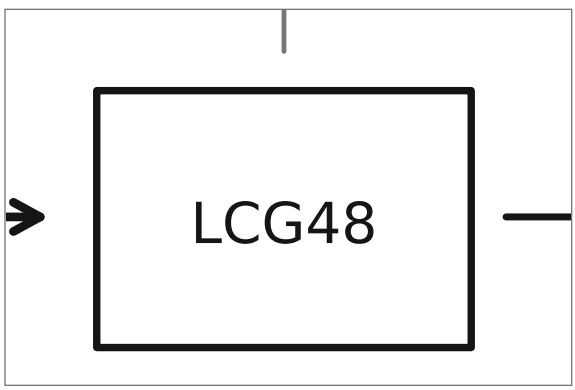

Vector detail / 1.42× main-view scale

HOW THE OPERATION WORKS

Java Random updates a 48-bit linear-congruential state; nextBytes exposes a particular sequence of output bytes.

READ THE THREE STAGES

01 48-bit Java state
02 LCG updates
03 nextBytes stream

WHAT WAS ACTUALLY DONE

The model reproduces those bytes from a candidate explicit seed. Timestamp-window enumeration tests only programs that really seeded and consumed that generator in the modeled way.

ORIGINAL FINDING / IMPLEMENTED/REGISTRY

Models the 48-bit LCG and timestamp-seeded nextBytes path; registered runtime vectors distinguish model fidelity from a recovery.