M167

glibc rand/random byte-fill replay

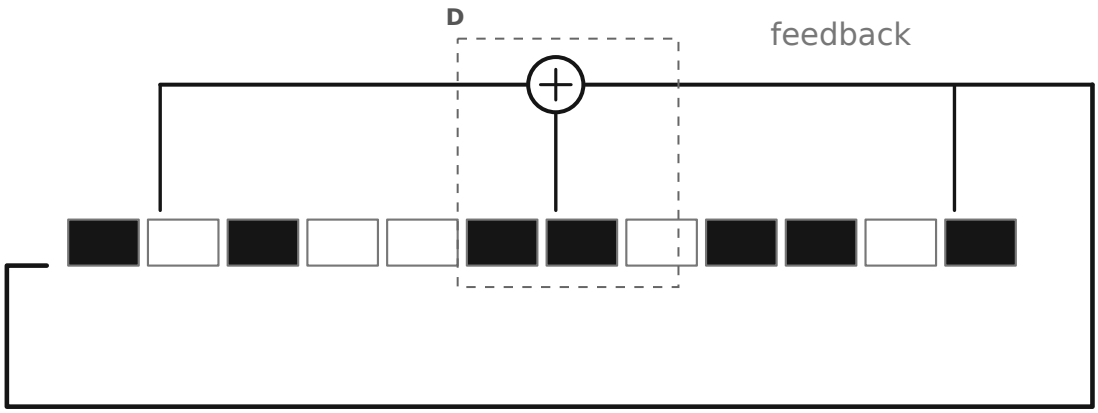

01 glibc state words

02 add feedback taps

03 truncated output bytes

D / OPERATION DETAIL

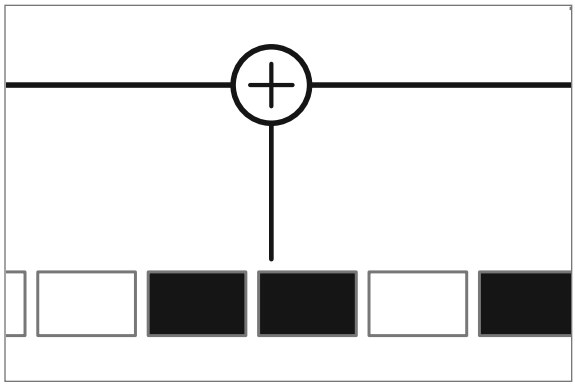

Vector detail / 1.38× main-view scale

HOW THE OPERATION WORKS

glibc rand/random uses additive-feedback state; truncating its outputs to bytes can make keys reproducible from a small seed.

READ THE THREE STAGES

01 glibc state words
02 add feedback taps
03 truncated output bytes

WHAT WAS ACTUALLY DONE

The family model initializes and warms the state, then emits low bytes under the catalog's byte-fill recipe. Generator fidelity is tested separately from applicability to a target wallet.

ORIGINAL FINDING / IMPLEMENTED/REGISTRY

Models clock-seeded additive-feedback output truncated into key bytes.