M169

Lehmer minstd_rand replay

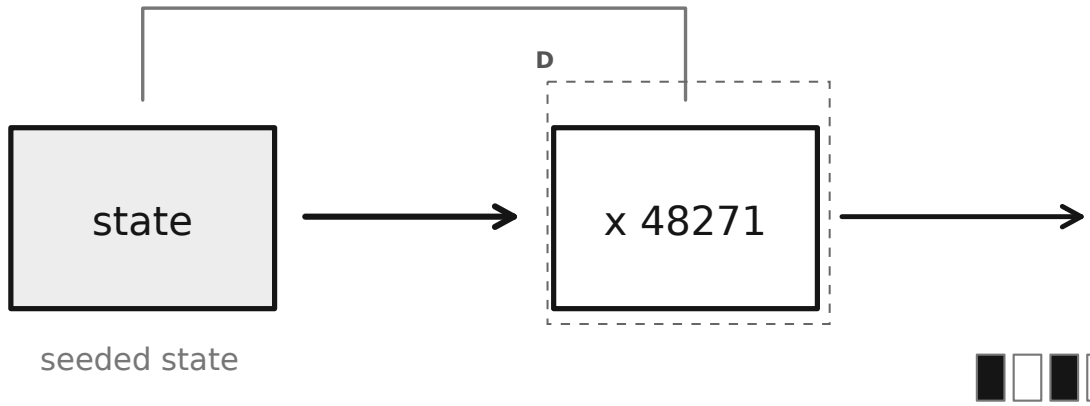

01	02	03
Lehmer state	times 48271 mod p	byte stream

D / OPERATION DETAIL

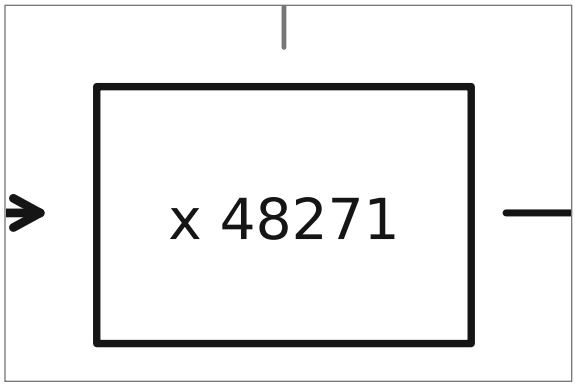

Vector detail / 1.42× main-view scale

HOW THE OPERATION WORKS

minstd_rand uses multiplier 48271 with the same prime modulus, producing a different deterministic stream.

READ THE THREE STAGES

01 Lehmer state
02 times 48271 mod p
03 byte stream

WHAT WAS ACTUALLY DONE

The model keeps this family separate because seed replay with the wrong multiplier produces different keys. A sweep must identify the exact generator and byte extraction recipe it covers.

ORIGINAL FINDING / IMPLEMENTED/REGISTRY

Models multiplier 48271 key-byte generation, separately from minstd_rand0.