M173

PHPCoinAddress legacy and modern keygen

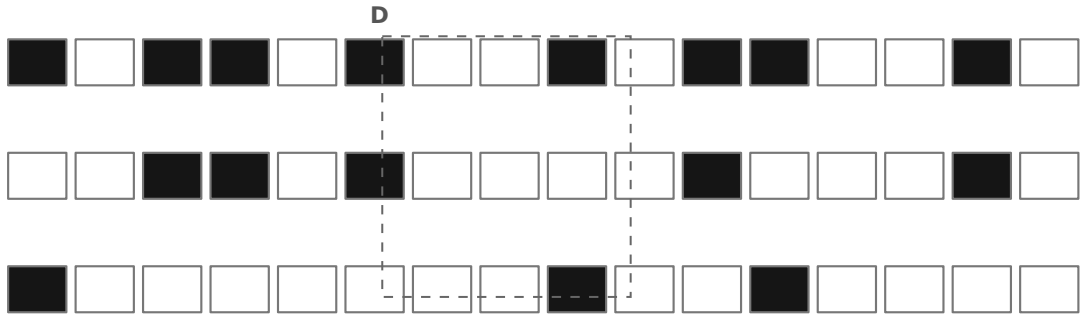

01	02	03
first-byte constraint	wallet-specific calls	key byte string

D / OPERATION DETAIL

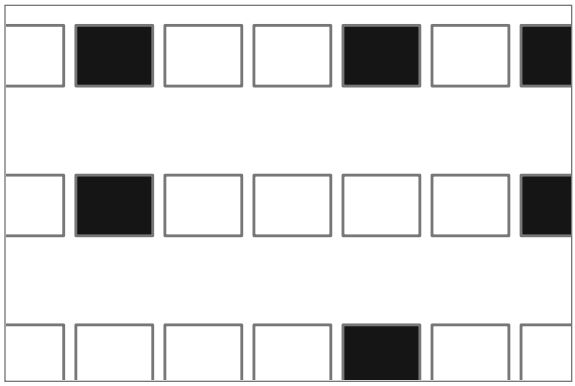

Vector detail / 1.32× main-view scale

HOW THE OPERATION WORKS

PHPCoinAddress applies its own bounded byte calls, including a special first-byte range, around PHP's generator.

READ THE THREE STAGES

01 first-byte constraint
02 wallet-specific calls
03 key byte string

WHAT WAS ACTUALLY DONE

Dedicated wrappers reproduce those calls for both old and modern modes. Replaying plain mt_rand bytes would omit this wallet-specific transformation and could miss its generated keys.

ORIGINAL FINDING / IMPLEMENTED/REGISTRY

Dedicated first-byte/range rules are modeled under both PHP generator modes.