M177

Timestamp/UUID hash-derived keys

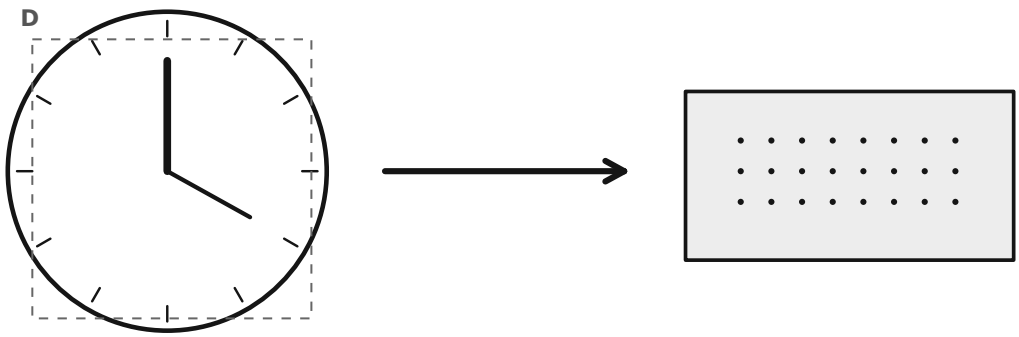

01	02	03
timestamp / UUID	encode and hash	full-width output

D / OPERATION DETAIL

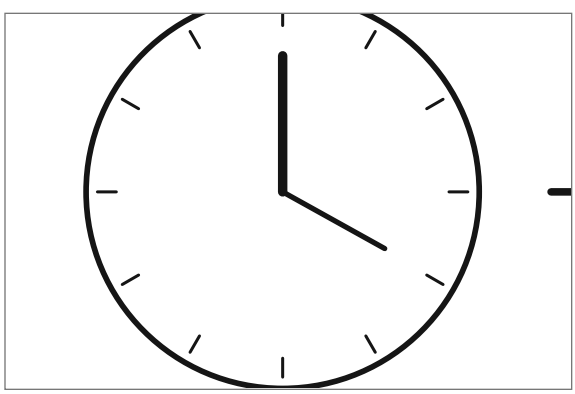

Vector detail / 1.23× main-view scale

HOW THE OPERATION WORKS

Hashing a predictable timestamp or weak UUID produces a full-length string but retains the small input uncertainty.

READ THE THREE STAGES

01 timestamp / UUID
02 encode and hash
03 full-width output

WHAT WAS ACTUALLY DONE

The catalog hashes selected second/millisecond and weak-UUID encodings into candidate keys. It searches their input choices, not the full 256-bit digest space.

ORIGINAL FINDING / IMPLEMENTED

SHA-256 clock, millisecond and weak-UUID key recipes are modeled as bounded generator hypotheses.