M182

Recoverable-hit rederivation/address-type audit

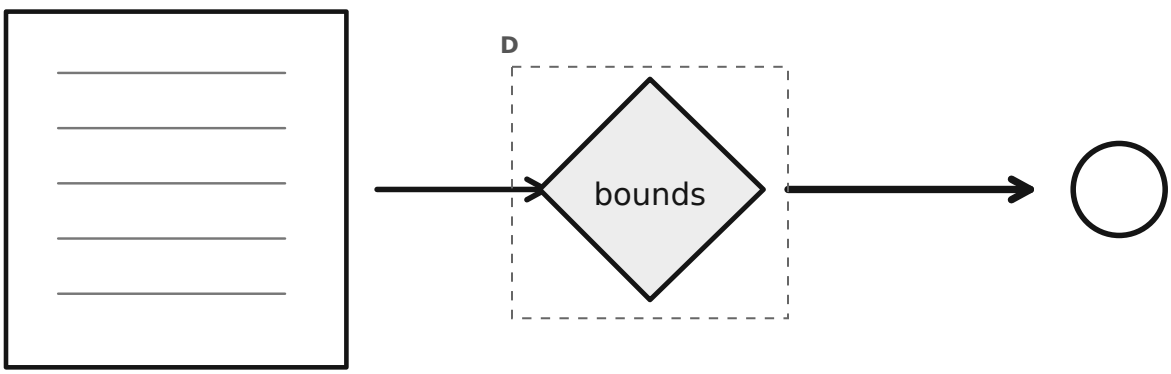

01 proposed scanner hit

02 rederive exact path

03 address-type audit

D / OPERATION DETAIL

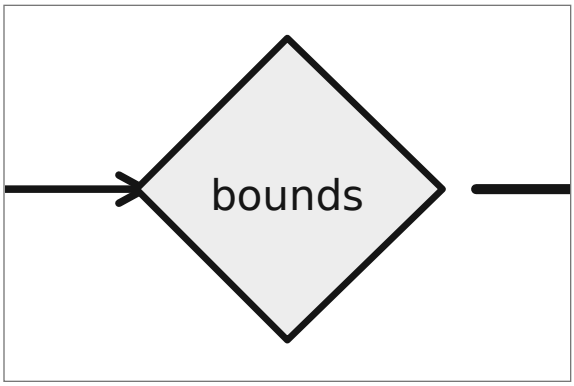

Vector detail / 1.37× main-view scale

HOW THE OPERATION WORKS

Recompute the complete derivation and exact address type before accepting a scanner's proposed recovery.

READ THE THREE STAGES

01 proposed scanner hit
02 rederive exact path
03 address-type audit

WHAT WAS ACTUALLY DONE

verify_scan_hits.py rejects candidates whose derivation or P2PKH/P2SH/witness interpretation does not match. It corrects the earlier tendency to label raw index associations as recovered wallets.

ORIGINAL FINDING / AUDITED/CORRECTED

Recompute candidate addresses and reject type mismatches before reporting a recovery; prior raw hits were not all valid.