M185
Zeckendorf/Fibonacci sparsity

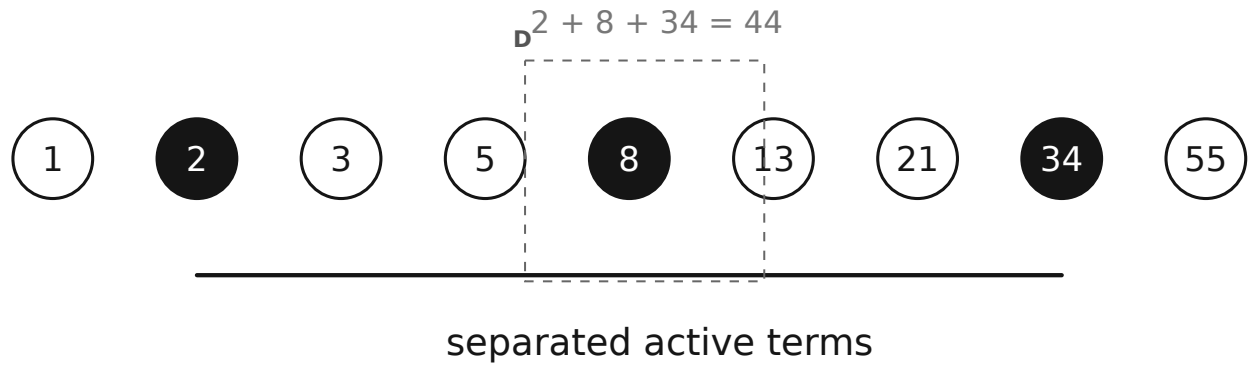

01 integer value

02 nonadjacent Fibonacci terms

03 sparse representation

D / OPERATION DETAIL

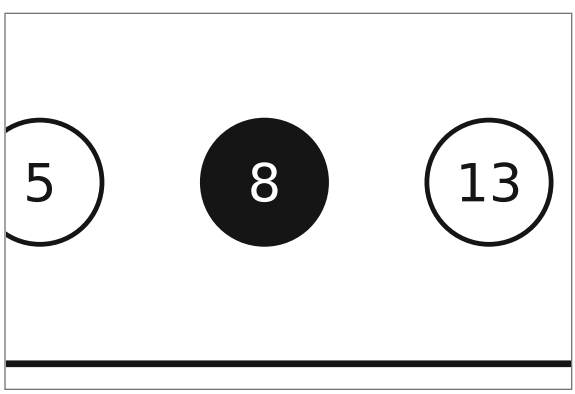

Vector detail / 1.56× main-view scale

HOW THE OPERATION WORKS

Represent integers as sums of nonadjacent Fibonacci numbers and measure how sparse that representation is.

READ THE THREE STAGES

01 integer value
02 nonadjacent Fibonacci terms
03 sparse representation

WHAT WAS ACTUALLY DONE

The code compares known-key weights with random-key weights. Changing numeral systems can change visible sparsity without reducing the number of possible keys.

ORIGINAL FINDING / EXECUTED RECORD

Compare Fibonacci representation weights with random keys; no significant anomaly reported.