M204

Signed quotient hierarchy with common-factor removal

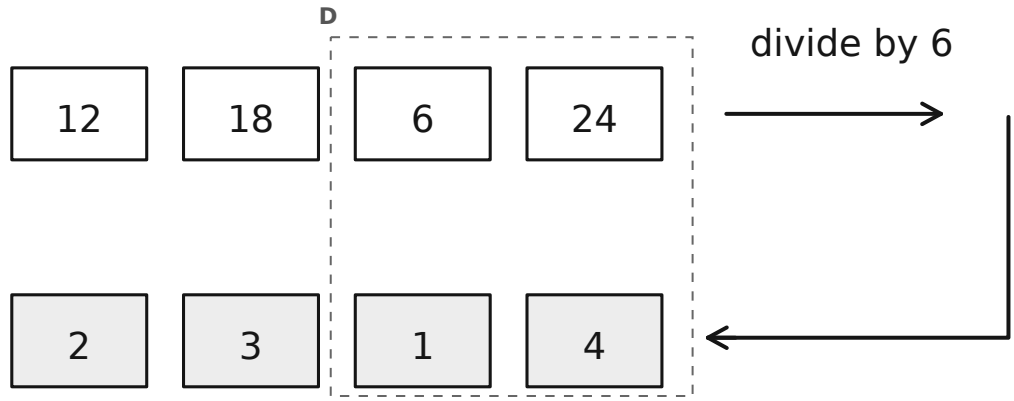

01 signed difference row

02 remove common powers

03 primitive next row

D / OPERATION DETAIL

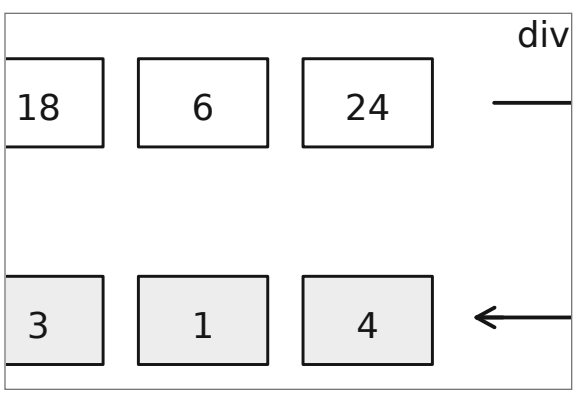

Vector detail / 0.96× main-view scale

HOW THE OPERATION WORKS

Keep signed integer differences and divide a row by m whenever every entry shares that factor before taking the next difference.

READ THE THREE STAGES

01 signed difference row
02 remove common powers
03 primitive next row

WHAT WAS ACTUALLY DONE

The quotient experiment records divisions and exact normalized states. Removing common factors exposes structure but can still leave growing values or unresolved trajectories.

ORIGINAL FINDING / EXECUTED RECORD

Remove factors of the full modulus before continuing signed differences; zero, cycle and capped outcomes remain separate.