M207

Inverse-difference kernel/anchor tests

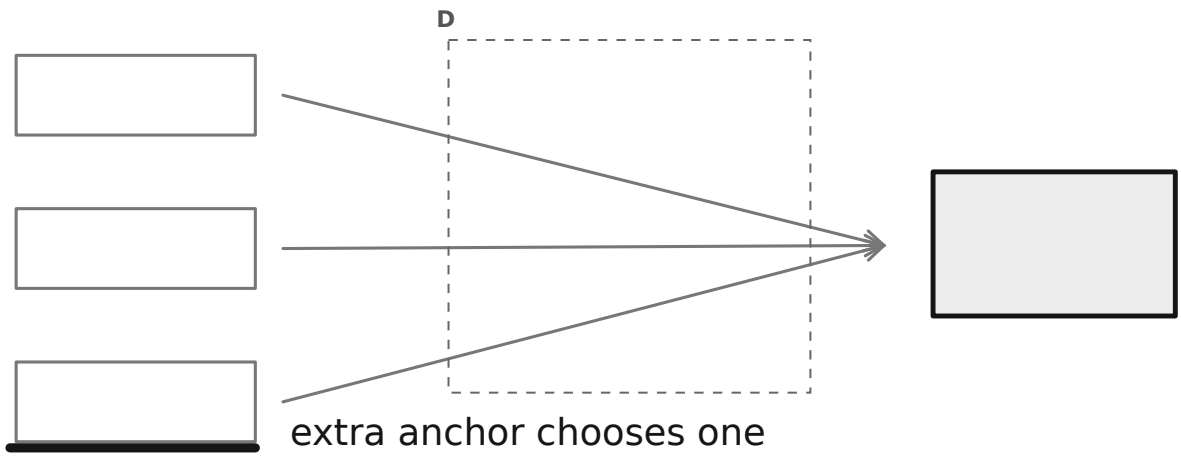

01 shared difference row

02 many possible originals

03 anchor selects one

D / OPERATION DETAIL

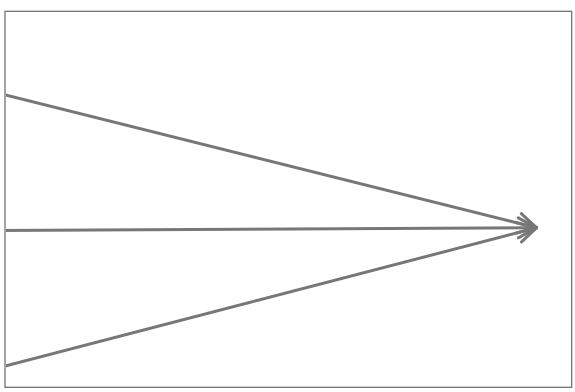

Vector detail / 0.98× main-view scale

HOW THE OPERATION WORKS

Group all starting rows that produce the same observed difference row. Additional anchors can select among these inverse candidates.

READ THE THREE STAGES

01 shared difference row
02 many possible originals
03 anchor selects one

WHAT WAS ACTUALLY DONE

inverse_capability.py exhaustively counts compatible inputs in small finite systems. If several remain, the transformed row alone has lost information and cannot uniquely reconstruct the original.

ORIGINAL FINDING / EXECUTED RECORD

Enumerate compatible starting rows; anchors can resolve lost constants, but the residual hierarchy supplies no missing observations.