M213

Classical BSGS multiplicative-order finder

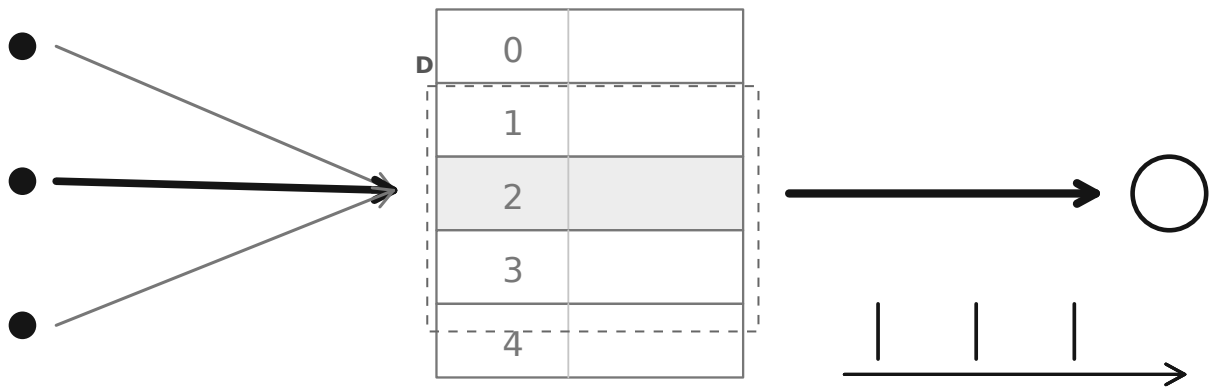

D / OPERATION DETAIL

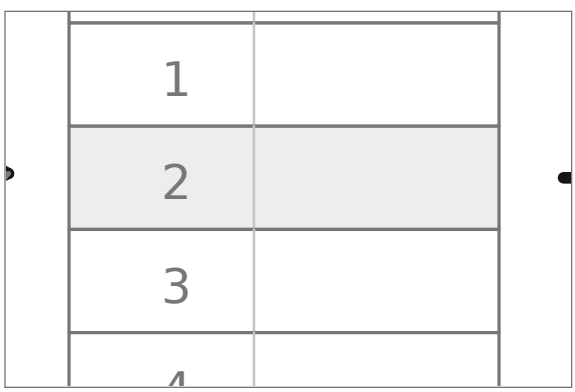

Vector detail / 1.40× main-view scale

HOW THE OPERATION WORKS

BSGS finds an exponent r with a^r=1 modulo N by matching stored small powers against larger steps.

READ THE THREE STAGES

01 small modular powers
02 matching table
03 large exponent steps

WHAT WAS ACTUALLY DONE

Classical Python/native order routines operate on bounded integer examples. In the factoring reduction they replace the quantum order-finding oracle; no QFT is executed.

ORIGINAL FINDING / EXECUTED RECORD

Exact small-integer order traces and backend comparisons; stands in for an order oracle, not a quantum device.